


HiPak Gen4

THORN

96636210 HIPAK G4 L LED30000-840 WB HF QC5



HiPak Gen4


An IP65 single point suspension LED high bay luminaire with wide beam optic. Electronic, fixed output control gear, for 220-240V, 50/60Hz supply. Class I electrical. IK08. Housing: die-cast aluminium. Lens/Diffuser: polycarbonate. Supplied with mounting hook. Equipped with 5 pole Quick Connect socket. Complete with 4000K LED.

ambient temperature: -30°C to +50°C


Dimensions: Ø380 x 170 mm
Luminaire input power: 170.6 W
Luminaire luminous flux: 30000 lm
Luminaire efficacy: 176 lm/W
Weight: 5.22 kg



TLG_HIP4_F_NO_STIR_2.jpg

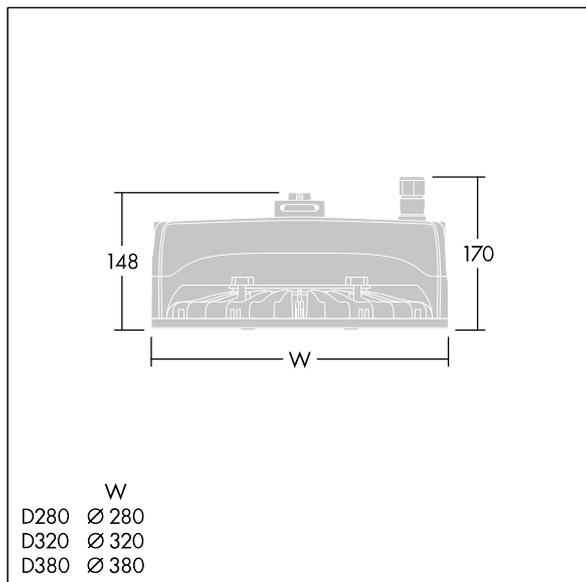

TLG_HIP4_M_ALL.wmf

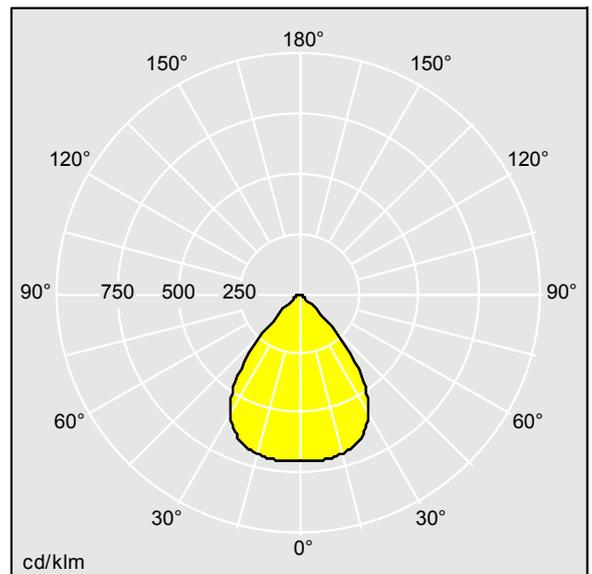

TLG_SP_0045856_L_WB_30K.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 30000 lm
Luminaire efficacy*: 176 lm/W
Colour Rendering Index min.: 80
Ballast: 1 x 87500827 LCO 200/200-1050/355 NF C ADV3
Correlated colour temperature*: 4000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
Rated median useful life*:
L80 100000h at 25°C
Luminaire input power*: 170.6 W Power factor = 0.98
Dimming: FO
Maintenance category CIE 97: E - Dust-proof IP5X
Total harmonic distortion (THD): 6.00 %
LOR: 1,00 ULOR: 0,00 DLOR: 1,00

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.