# Avenue

## 96684704 AV 12L35-730 WSC GL CL1 WS0.3 T60 ANT

LED 13W AVGL12L35-730WSC | CB | ISO 9223 C5 | IP66 | IK10 | $T_a$35


### Avenue

Sustainable urban lighting without compromise with 12 LEDs driven at 350mA and a Wide Street Comfort distribution optic. Class I electrical, IP66, Impact strength: IK10.Electronic, Programmable. Body: Die-cast aluminium in anthracite (close to RAL7043). Robust solution with excellent corrosion resistance of C5. Enclosure: flat glass. Post top mounting to Ø60mm column. Pre-wired with 0.3m, 1.5mm² H07RN-F cable. Complete with 3000K LED


Dimensions: Ø501 x 547 mm
Luminaire input power: 13.6 W
Luminaire luminous flux: 1780 lm
Luminaire efficacy: 131 lm/W
Weight: 9.93 kg
Scx: 0.13 m²



TLG_AVEN_F_ANT_MTP60_1.jpg

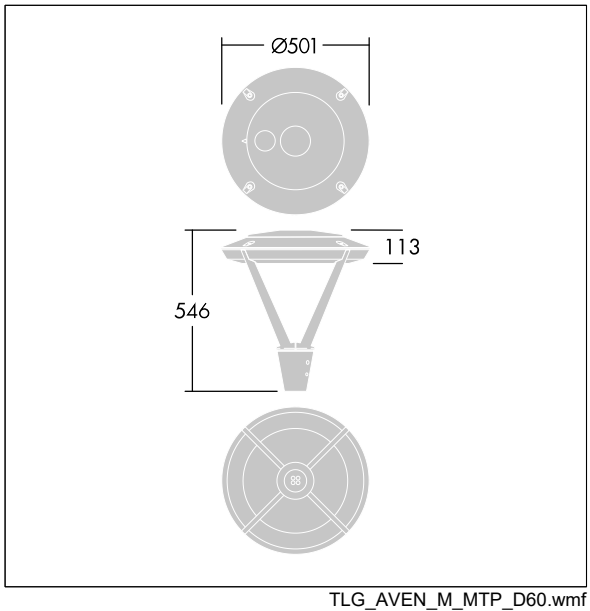


TLG_AVEN_M_MTP_D60.wmf

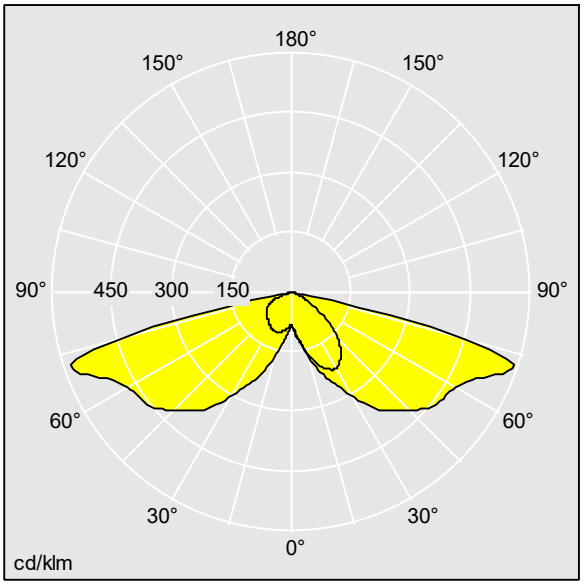


AVENUE_12_350_730_WSC_GL_CL2_T60.ldt

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 1780 lm
Luminaire efficacy*: 131 lm/W
Colour Rendering Index min.: 70
Ballast: 1 x 87500875 LCO 14/100-500/38 NF C ADV3
LOR: 1,00 ULOR: 0,00 DLOR: 1,00

Correlated colour temperature*: 3000 Kelvin
Chromaticity tolerance (initial MacAdam): 5
Rated useful life (B10)*:
L90 100000 h at 35 °C
Luminaire input power*: 13.6 W Power factor = 0.97
Control: PROG
Maintenance category CIE 97: E - Dust-proof IP5X

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.Risk group

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting