

NEW!

Medium CETUS



Medium **CETUS**
Without Base



Medium **CETUS**
U Bracket

Introducing **CETUS**, the cutting-edge circular projector designed to meet the most demanding energy efficiency standards while offering unparalleled modularity and versatility for a wide range of architectural lighting applications. Its innovative design seamlessly integrates with various illumination tasks, ensuring that it enhances both functionality and aesthetics in any environment.

One of the standout features of **CETUS** is its advanced control gear, engineered for exceptional longevity. By incorporating thermal isolation from the light source, we extend the lifespan of the control system, significantly reducing maintenance needs. The comprehensive quality control options range from straightforward on-off controls to DALI compatibility, making **CETUS** adaptable to a variety of smart lighting systems. Additionally, the optional built-in surge protection device fortifies **CETUS** against the harshest ambient conditions, providing peace of mind in even the most challenging settings.

CETUS is equipped with the innovative UniBlockDelta-P-Guard, a sophisticated feature designed to quickly equalize pressure differentials that may arise from rapid changes in ambient conditions. This ensures reliable performance and durability, even in dynamic environments.

Safety and efficacy are paramount in outdoor applications, which is why **CETUS** utilizes ultra-high light transparent safety glass with IK09 impact resistance. This robust material not only maximizes light transmission but also meets the stringent safety requirements for outdoor use, ensuring the projector remains functional and effective over time.

The entire luminaire body undergoes a rigorous process of Nano-Ceramic conversion, followed by a high-quality primer and a durable powder coating. This treatment not only enhances the aesthetic appeal of **CETUS** but also guarantees its longevity and resilience in tough environments. In summary, **CETUS** is not just a lighting fixture; it's a comprehensive solution designed to elevate architectural illumination while adhering to the highest standards of efficiency, durability, and performance. Embrace the future of lighting with **CETUS**, where innovation meets functionality.

NEW!

Mega CETUS



Mega **CETUS**
Without Base



Mega **CETUS**
U Bracket



Content
by Application



Content
by Family



www.unilamp.co.th/en/p/cetus


Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 Die cast aluminum body and components.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- GFR PA6.6 terminal block.
- Installation must be carried out according to the enclosed product manual.

Available Color




****Custom colors are available on request.**

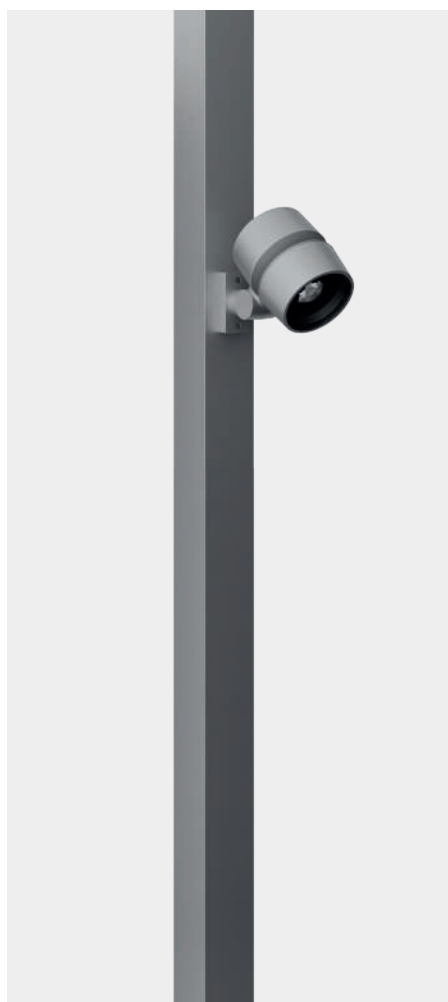


CETUS + Accessory kit
for pole attached solutions




CETUS + Accessory kit
for ground mount solutions

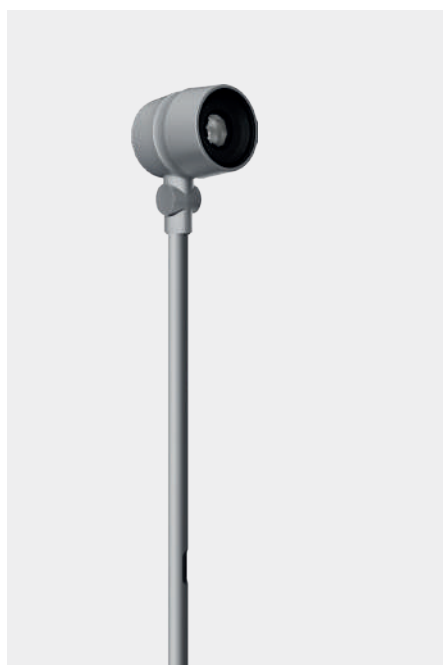


CETUS + Accessory kit
for ground mount solutions

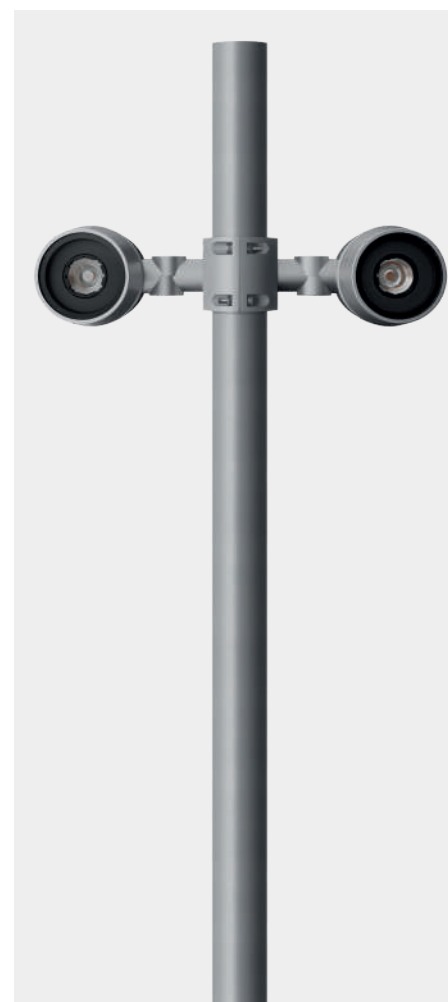


CETUS + Accessory kit
for pole mount solutions

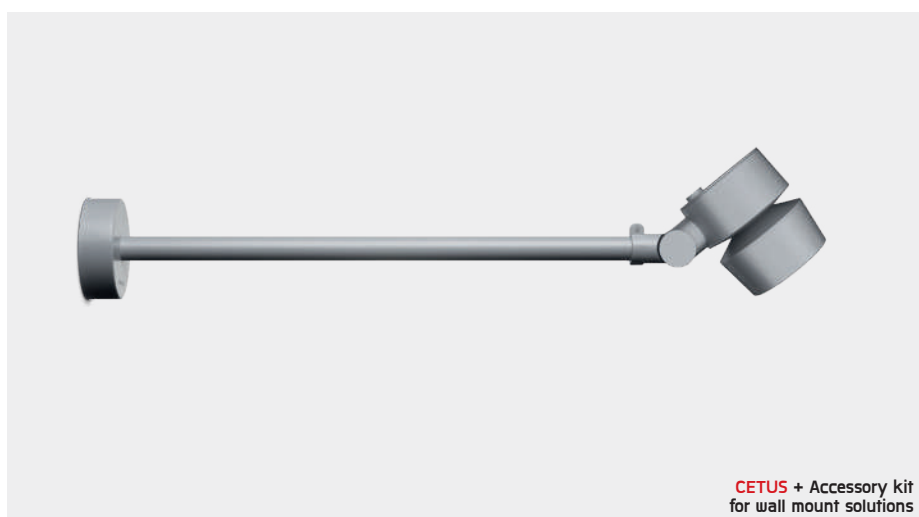

CETUS + Accessory kit
for wall mount solutions

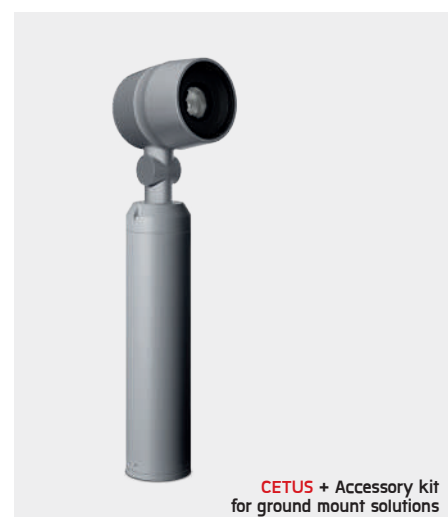

CETUS + Accessory kit
for ground mount solutions

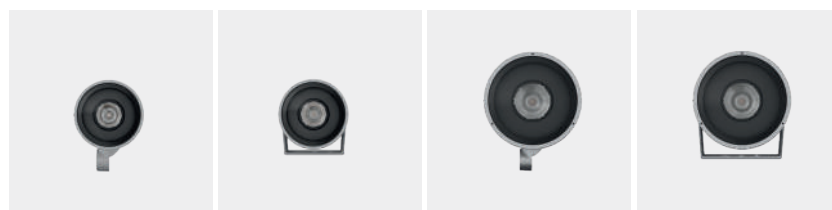

Medium CETUS		Mega CETUS	
Without Base	U Bracket	Without Base	U Bracket


Accessory		Without Base	U Bracket	Without Base	U Bracket
	Honeycomb louver, COB, pre-assembly from factory	•	•	•	•
	Glare shield cap, pre-assembly from factory	•	•	•	•
	Snoot, pre-assembly from factory	•	•	•	•
	Mounting base, rotateable, On-Off, pre-assembly from factory	•	–	•	–
	Mounting base, rotateable, 1-10V or DALI, pre-assembly from factory	•	–	•	–
	Outrigger arm, L= 740mm, On-Off / 1-10V or DALI pre-assembly from factory	•	–	•	–
	Earth spike, L= 900mm, aluminum, On-Off / 1-10V or DALI pre-assembly from factory	•	–	•	–
	Earth spike, L= 1390-1760mm, aluminum, On-Off / 1-10V or DALI, length adjustable pre-assembly from factory	•	–	•	–
	Cylindrical aluminum pole, diameter 105mm, H= 522mm, On-Off / 1-10V / DALI pre-assembled from factory	•	–	•	–
	Pole mounting arm, for 1-3 projector	•	–	•	–
	Pole mount adaptor, pole diameter 60mm, On-Off / 1-10V or DALI pre-assembly from factory	•	–	•	–
	Pole mount adaptor, pole diameter 76mm, On-Off / 1-10V or DALI pre-assembly from factory	•	–	•	–
	Pole mount adaptor, pole diameter 102-105mm, On-Off / 1-10V or DALI pre-assembly from factory	•	–	•	–
	Pole mount adaptor, rectangular pole, On-Off / 1-10V or DALI pre-assembly from factory	•	–	•	–

• MODULAR SOLUTIONS

			
Medium CETUS		Mega CETUS	
Without Base	U Bracket	Without Base	U Bracket


Accessory	Without Base	U Bracket	Without Base	U Bracket
 Pole clamp, pole diameter 60-76mm, for wall or pole mounting arm	•	–	•	–
 Pole clamp, pole diameter 102-105mm, for wall or pole mounting arm	•	–	•	–
 Pole clamp, pole diameter 60-76mm, single side luminaire mounting , On-Off / 1-10V or DALI, pre-assembly from factory	•	–	•	–
 Pole clamp, pole diameter 102-105mm, single side luminaire mounting , On-Off / 1-10V or DALI, pre-assembly from factory	•	–	•	–
 Pole clamp, pole diameter 60-76mm, double sided luminaire mounting , On-Off / 1-10V or DALI, pre-assembly from factory	•	–	•	–
 Pole clamp, pole diameter 102-105mm, double sided luminaire mounting , On-Off / 1-10V or DALI, pre-assembly from factory	•	–	•	–
 Cylindrical aluminum pole, diameter 105mm, H= 3500mm / 4000mm, with cable outlets and top cap	•	–	•	–
 Cylindrical hot-dip galvanized steel pole, diameter 102mm, H= 4000mm / 5000mm, with cable outlets and top cap	•	–	•	–

• MODULAR SOLUTIONS


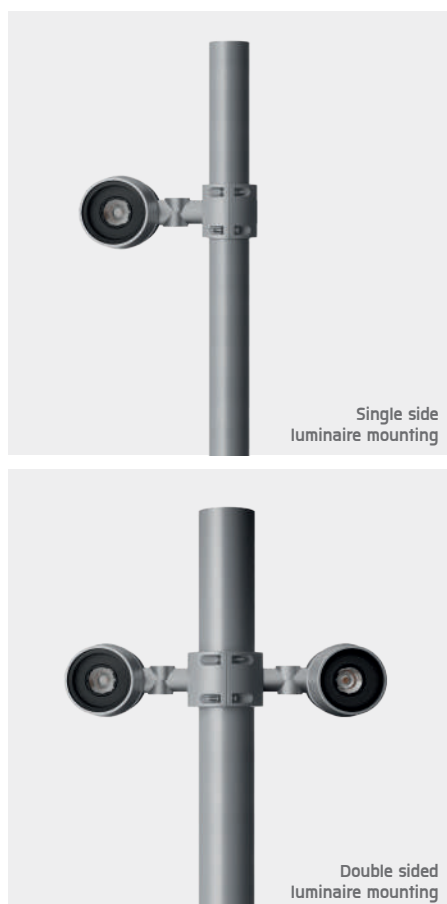


*Please see Poles & Anchor bolt section for pole mounting options

■ CETUS + Accessory kit for pole mount solutions

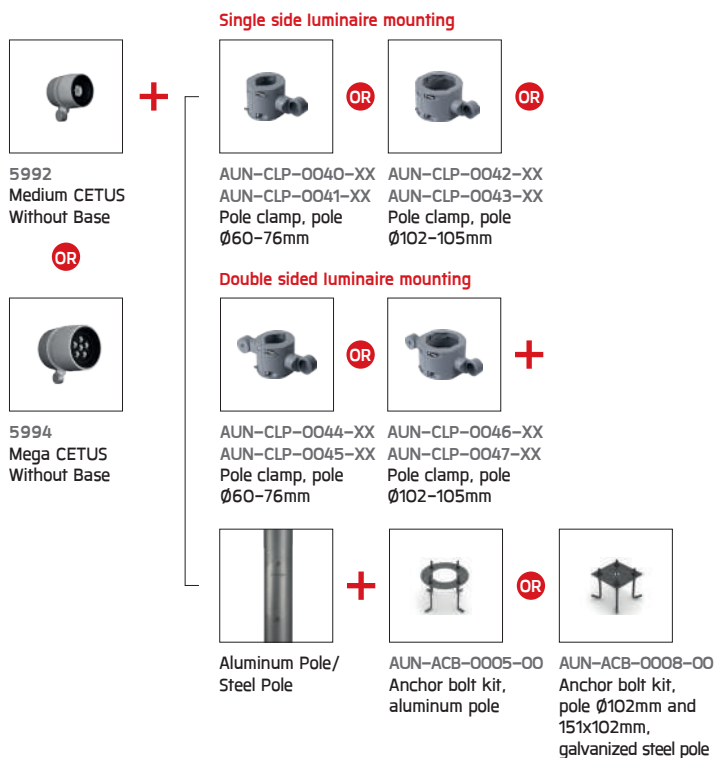




■ CETUS + Accessory kit for pole attached solutions

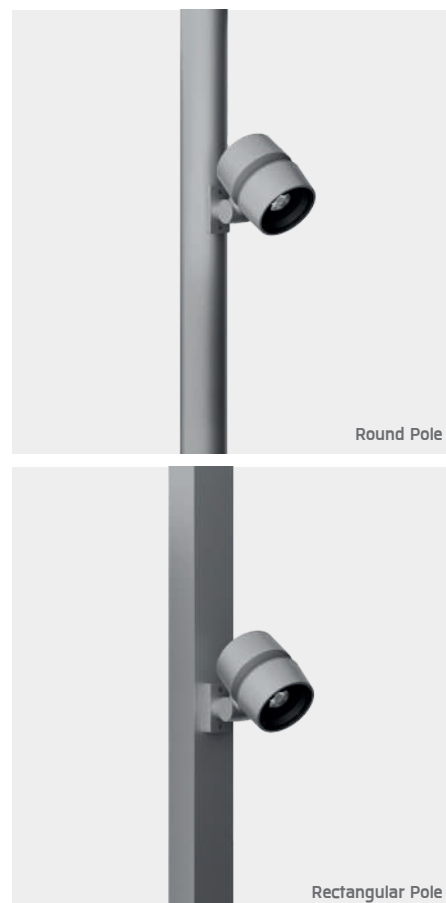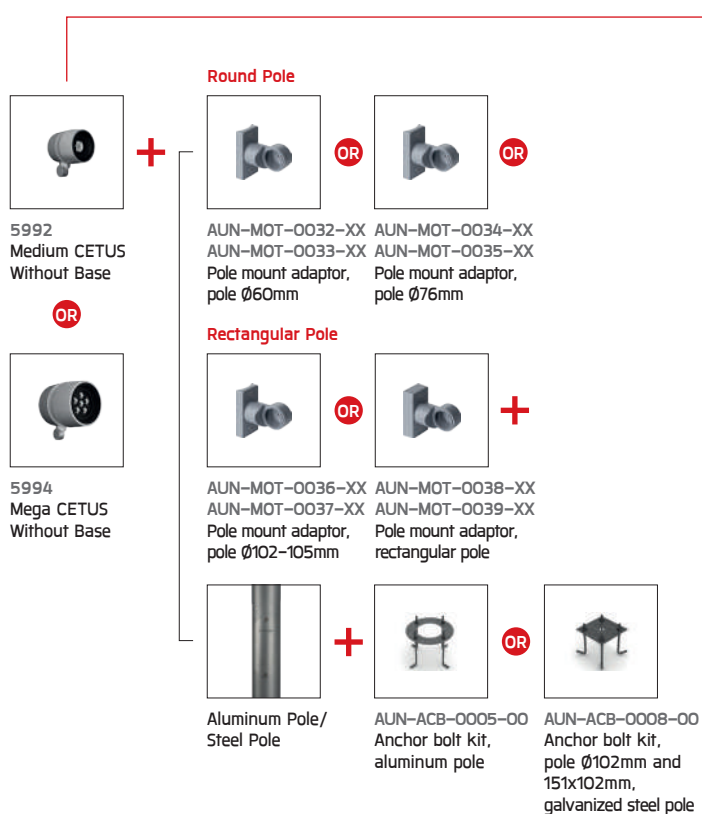



*Please see Poles & Anchor bolt section for pole mounting options

• MODULAR SOLUTIONS


▪ CETUS + Accessory kit for pole mount solutions

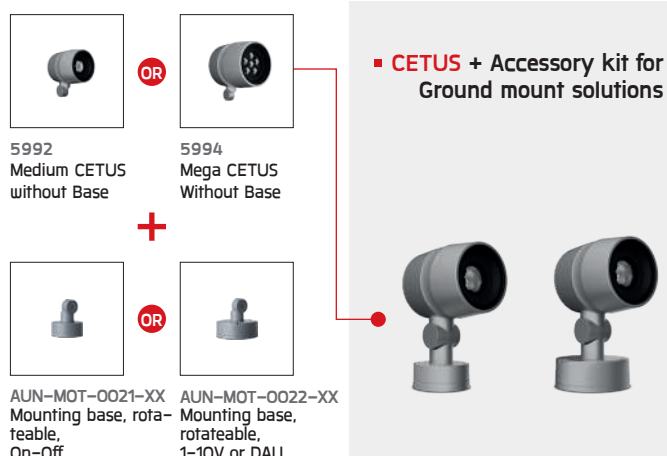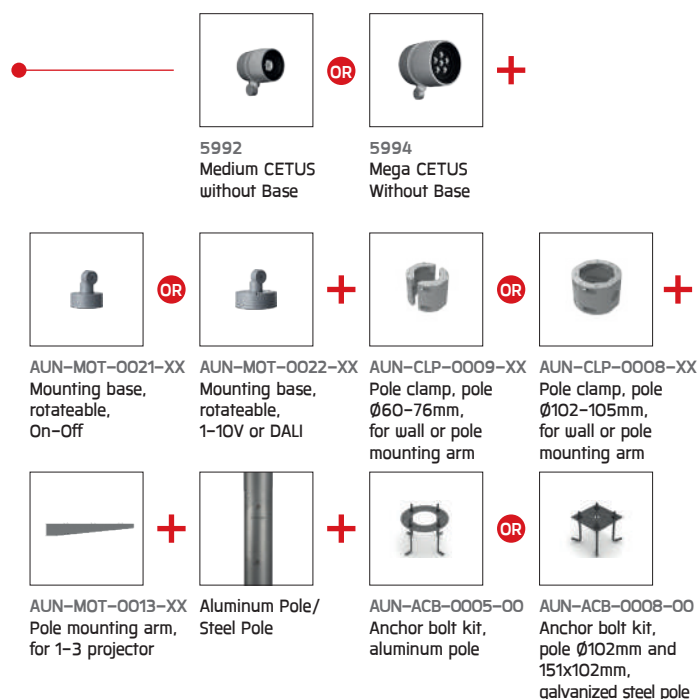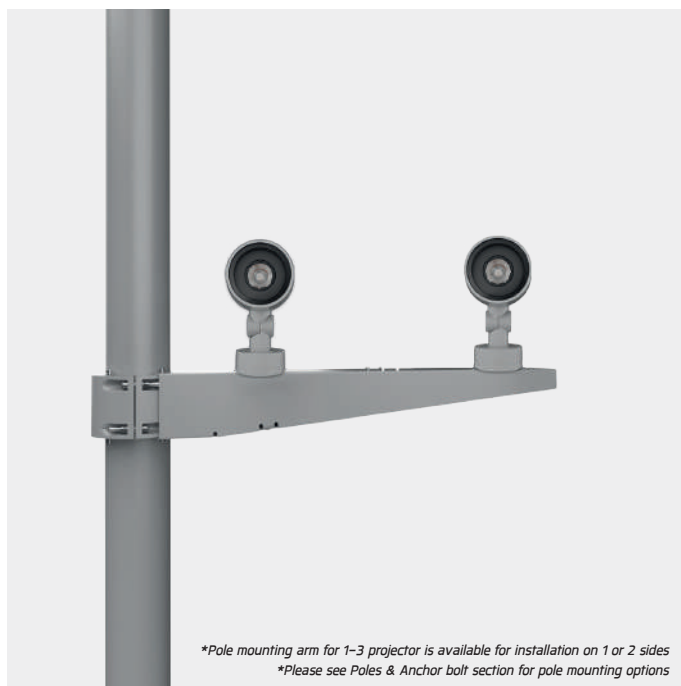

▪ CETUS + Accessory kit for Wall mount solutions

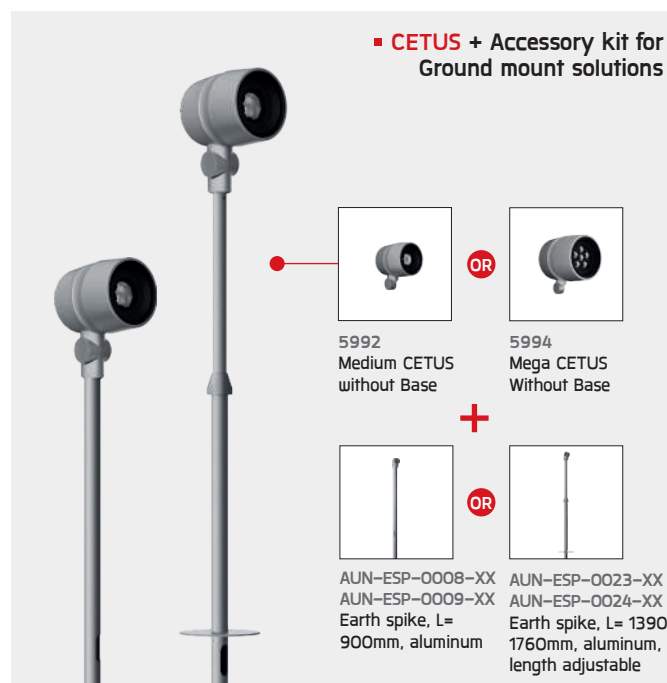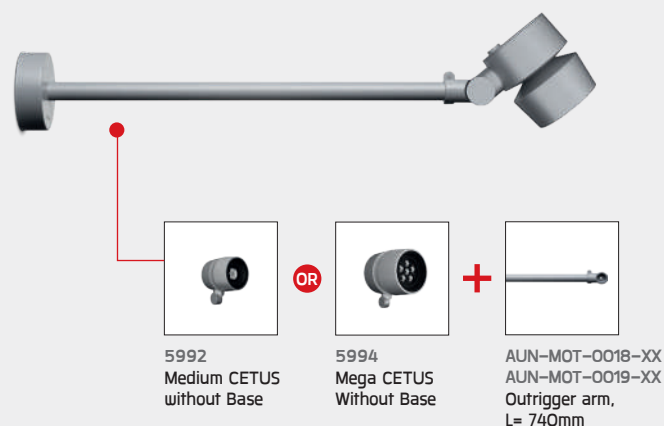


▪ CETUS + Accessory kit for Ground mount solutions

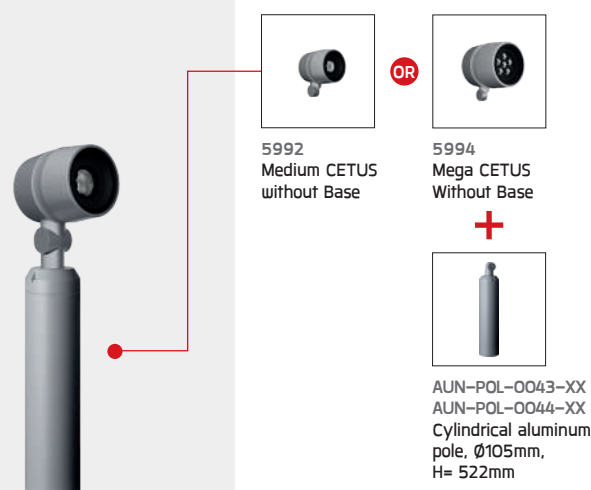


CETUS



Medium CETUS – Without Base **NEW!**



Mega CETUS – Without Base **NEW!**



Medium CETUS

Application Type : Projector
Subgroup : Circular

Medium CETUS – Without Base / 5992	
Luminaire Performance	
260 – 2420 lm	
5 – 21 W	
52 – 115 lm/W	
Beam Options	
Narrow	Medium
Wide	
Color Temperature	
2700K/ 3000K/ 4000K	
Controller	
On-Off/ DALI	
Input Options	
220–240Vac 50/60Hz	

Mega CETUS

Application Type : Projector
Subgroup : Circular

Mega CETUS – Without Base / 5994	
Luminaire Performance	
1060 – 5850 lm	
15 – 49 W	
67 – 119 lm/W	
Beam Options	
Narrow	Medium
Wide	
Color Temperature	
2700K/ 3000K/ 4000K	
Controller	
On-Off/ DALI	
Input Options	
220–240Vac 50/60Hz	

Accessories

	Honey comb louver		Glare shield Cap		Snoot		Tree strap		Earth spike		Mounthing base
	Pole clamp		Pole mount adaptor		Mounting arm		Outrigger arm		Short pole		Anchor bolt
	Aluminum pole		Steel pole		IP68 Connector		Surge protection				

*Please see Poles & Anchor bolt section for pole mounting options




Medium CETUS – U Bracket NEW!



COB



Hi-Power 7*




Mega CETUS – U Bracket NEW!



COB



Hi-Power 7*



Medium CETUS

Application Type : Projector
Subgroup : Circular

Medium CETUS – U Bracket / 5997

Luminaire Performance

260 – 2420 lm

5 – 21 W

52 – 115 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-Off/ DALI

Input Options

220-240Vac 50/60Hz

Mega CETUS

Application Type : Projector
Subgroup : Circular

Medium CETUS – U Bracket / 5999

Luminaire Performance

1060 – 5850 lm

15 – 49 W

67 – 119 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-Off/ DALI

Input Options

220-240Vac 50/60Hz

Accessories



Honey comb
louver



Glare shield
Cap



Snoot



IP68
Connector



Surge protection

Medium CETUS – Without Base

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller		Ordering Code
								
OD-5992  Hi Power 7°	5 W	7°	3000 K 3000 K	260 lm 260 lm	52 lm/W 52 lm/W	•	•	5992-4-3-227-XX 5992-4-5-227-XX
	8 W	7°	3000 K 3000 K	420 lm 420 lm	52 lm/W 52 lm/W	•	•	5992-4-3-293-XX 5992-4-5-293-XX
OD-5992  COB	11 W	27°	2700 K	1040 lm	94 lm/W	•		5992-B-3-506-XX
			3000 K	1100 lm	100 lm/W	•		5992-B-3-887-XX
			4000 K	1160 lm	105 lm/W	•		5992-B-3-891-XX
			2700 K	1040 lm	94 lm/W		•	5992-B-5-506-XX
			3000 K	1100 lm	100 lm/W		•	5992-B-5-887-XX
			4000 K	1160 lm	105 lm/W		•	5992-B-5-891-XX
	11 W	38°	2700 K	1120 lm	101 lm/W	•		5992-C-3-506-XX
			3000 K	1180 lm	107 lm/W	•		5992-C-3-887-XX
			4000 K	1240 lm	112 lm/W	•		5992-C-3-891-XX
			2700 K	1120 lm	101 lm/W		•	5992-C-5-506-XX
			3000 K	1180 lm	107 lm/W		•	5992-C-5-887-XX
			4000 K	1240 lm	112 lm/W		•	5992-C-5-891-XX
	11 W	49°	2700 K	1120 lm	101 lm/W	•		5992-D-3-506-XX
			3000 K	1170 lm	106 lm/W	•		5992-D-3-887-XX
			4000 K	1240 lm	112 lm/W	•		5992-D-3-891-XX
			2700 K	1120 lm	101 lm/W		•	5992-D-5-506-XX
			3000 K	1170 lm	106 lm/W		•	5992-D-5-887-XX
			4000 K	1240 lm	112 lm/W		•	5992-D-5-891-XX
	21 W	27°	2700 K	2040 lm	97 lm/W	•		5992-B-3-505-XX
			3000 K	2150 lm	102 lm/W	•		5992-B-3-902-XX
			4000 K	2250 lm	107 lm/W	•		5992-B-3-905-XX
			2700 K	2040 lm	97 lm/W		•	5992-B-5-505-XX
			3000 K	2150 lm	102 lm/W		•	5992-B-5-902-XX
			4000 K	2250 lm	107 lm/W		•	5992-B-5-905-XX
	21 W	38°	2700 K	2190 lm	104 lm/W	•		5992-C-3-505-XX
			3000 K	2310 lm	110 lm/W	•		5992-C-3-902-XX
			4000 K	2420 lm	115 lm/W	•		5992-C-3-905-XX
			2700 K	2190 lm	104 lm/W		•	5992-C-5-505-XX
			3000 K	2310 lm	110 lm/W		•	5992-C-5-902-XX
			4000 K	2420 lm	115 lm/W		•	5992-C-5-905-XX
	21 W	49°	2700 K	2180 lm	103 lm/W	•		5992-D-3-505-XX
			3000 K	2300 lm	109 lm/W	•		5992-D-3-902-XX
			4000 K	2410 lm	114 lm/W	•		5992-D-3-905-XX
			2700 K	2180 lm	103 lm/W		•	5992-D-5-505-XX
			3000 K	2300 lm	109 lm/W		•	5992-D-5-902-XX
			4000 K	2410 lm	114 lm/W		•	5992-D-5-905-XX
OD-5997  Hi Power 7°	5 W	7°	3000 K 3000 K	260 lm 260 lm	52 lm/W 52 lm/W	•	•	5997-4-3-227-XX 5997-4-5-227-XX
	8 W	7°	3000 K 3000 K	420 lm 420 lm	52 lm/W 52 lm/W	•	•	5997-4-3-293-XX 5997-4-5-293-XX
OD-5997  COB	11 W	27°	2700 K	1040 lm	94 lm/W	•		5997-B-3-506-XX
			3000 K	1100 lm	100 lm/W	•		5997-B-3-887-XX
			4000 K	1160 lm	105 lm/W	•		5997-B-3-891-XX
			2700 K	1040 lm	94 lm/W		•	5997-B-5-506-XX
			3000 K	1100 lm	100 lm/W		•	5997-B-5-887-XX
			4000 K	1160 lm	105 lm/W		•	5997-B-5-891-XX
	11 W	38°	2700 K	1120 lm	101 lm/W	•		5997-C-3-506-XX
			3000 K	1180 lm	107 lm/W	•		5997-C-3-887-XX
			4000 K	1240 lm	112 lm/W	•		5997-C-3-891-XX
			2700 K	1120 lm	101 lm/W		•	5997-C-5-506-XX
			3000 K	1180 lm	107 lm/W		•	5997-C-5-887-XX
			4000 K	1240 lm	112 lm/W		•	5997-C-5-891-XX
	11 W	49°	2700 K	1120 lm	101 lm/W	•		5997-D-3-506-XX
			3000 K	1170 lm	106 lm/W	•		5997-D-3-887-XX
			4000 K	1240 lm	112 lm/W	•		5997-D-3-891-XX
			2700 K	1120 lm	101 lm/W		•	5997-D-5-506-XX
			3000 K	1170 lm	106 lm/W		•	5997-D-5-887-XX
			4000 K	1240 lm	112 lm/W		•	5997-D-5-891-XX

*Please contact sales team for special request.

Medium CETUS – U Bracket

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller		Ordering Code
								
OD-5997  COB	21 W	27°	2700 K	2040 lm	97 lm/W	•		5997-B-3-505-XX
			3000 K	2150 lm	102 lm/W	•		5997-B-3-902-XX
			4000 K	2250 lm	107 lm/W	•		5997-B-3-905-XX
	21 W	38°	2700 K	2040 lm	97 lm/W		•	5997-B-5-505-XX
			3000 K	2150 lm	102 lm/W		•	5997-B-5-902-XX
			4000 K	2250 lm	107 lm/W		•	5997-B-5-905-XX
	21 W	49°	2700 K	2190 lm	104 lm/W	•		5997-C-3-505-XX
			3000 K	2310 lm	110 lm/W	•		5997-C-3-902-XX
			4000 K	2420 lm	115 lm/W	•		5997-C-3-905-XX
	21 W	49°	2700 K	2190 lm	104 lm/W		•	5997-C-5-505-XX
			3000 K	2310 lm	110 lm/W		•	5997-C-5-902-XX
			4000 K	2420 lm	115 lm/W		•	5997-C-5-905-XX

Mega CETUS – Without Base

OD-5994  Hi Power 7°	15 W	7°	3000 K	1060 lm	70 lm/W	•		5994-4-3-289-XX
	19 W	7°	3000 K	1280 lm	67 lm/W	•		5994-4-3-286-XX
			3000 K	1280 lm	67 lm/W		•	5994-4-5-286-XX
	 COB	24°	2700 K	3660 lm	101 lm/W	•		5994-B-3-506-XX
			3000 K	3850 lm	106 lm/W	•		5994-B-3-887-XX
			4000 K	4000 lm	111 lm/W	•		5994-B-3-891-XX
		33°	2700 K	3660 lm	101 lm/W		•	5994-B-5-506-XX
			3000 K	3850 lm	106 lm/W		•	5994-B-5-887-XX
			4000 K	4000 lm	111 lm/W		•	5994-B-5-891-XX
		33°	2700 K	3410 lm	94 lm/W	•		5994-C-3-506-XX
			3000 K	3590 lm	99 lm/W	•		5994-C-3-887-XX
			4000 K	3720 lm	103 lm/W	•		5994-C-3-891-XX
		55°	2700 K	3410 lm	94 lm/W		•	5994-C-5-506-XX
			3000 K	3590 lm	99 lm/W		•	5994-C-5-887-XX
			4000 K	3720 lm	103 lm/W		•	5994-C-5-891-XX
	36 W	55°	2700 K	3190 lm	88 lm/W	•		5994-D-3-506-XX
			3000 K	3360 lm	93 lm/W	•		5994-D-3-887-XX
			4000 K	3480 lm	96 lm/W	•		5994-D-3-891-XX
		87°	2700 K	3190 lm	88 lm/W		•	5994-D-5-506-XX
			3000 K	3360 lm	93 lm/W		•	5994-D-5-887-XX
			4000 K	3480 lm	96 lm/W		•	5994-D-5-891-XX
	49 W	24°	2700 K	5350 lm	109 lm/W	•		5994-E-3-506-XX
			3000 K	5650 lm	115 lm/W	•		5994-E-3-887-XX
			4000 K	5850 lm	119 lm/W	•		5994-E-3-891-XX
		33°	2700 K	5350 lm	109 lm/W		•	5994-E-5-506-XX
			3000 K	5650 lm	115 lm/W		•	5994-E-5-887-XX
			4000 K	5850 lm	119 lm/W		•	5994-E-5-891-XX
	49 W	24°	2700 K	5350 lm	109 lm/W	•		5994-B-3-505-XX
			3000 K	5650 lm	115 lm/W	•		5994-B-3-902-XX
			4000 K	5850 lm	119 lm/W	•		5994-B-3-905-XX
		33°	2700 K	4980 lm	101 lm/W		•	5994-B-5-505-XX
			3000 K	5260 lm	107 lm/W		•	5994-B-5-902-XX
			4000 K	5440 lm	111 lm/W		•	5994-B-5-905-XX
	49 W	55°	2700 K	4980 lm	101 lm/W	•		5994-C-3-505-XX
			3000 K	5260 lm	107 lm/W	•		5994-C-3-902-XX
			4000 K	5440 lm	111 lm/W	•		5994-C-3-905-XX
		87°	2700 K	4980 lm	101 lm/W		•	5994-C-5-505-XX
			3000 K	5260 lm	107 lm/W		•	5994-C-5-902-XX
			4000 K	5440 lm	111 lm/W		•	5994-C-5-905-XX
	49 W	55°	2700 K	4660 lm	95 lm/W	•		5994-D-3-505-XX
			3000 K	4920 lm	100 lm/W	•		5994-D-3-902-XX
			4000 K	5090 lm	103 lm/W	•		5994-D-3-905-XX
		87°	2700 K	4660 lm	95 lm/W		•	5994-D-5-505-XX
			3000 K	4920 lm	100 lm/W		•	5994-D-5-902-XX
			4000 K	5090 lm	103 lm/W		•	5994-D-5-905-XX
	49 W	55°	2700 K	4660 lm	95 lm/W	•		5994-E-3-505-XX
			3000 K	4920 lm	100 lm/W	•		5994-E-3-902-XX
			4000 K	5090 lm	103 lm/W	•		5994-E-3-905-XX
		87°	2700 K	4950 lm	101 lm/W		•	5994-E-5-505-XX
			3000 K	5230 lm	106 lm/W		•	5994-E-5-902-XX
			4000 K	5410 lm	110 lm/W		•	5994-E-5-905-XX

Mega CETUS – U Bracket

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller		Ordering Code
								
OD-5999								
 Hi Power 7°	15 W	7°	3000 K 3000 K	1060 lm 1060 lm	70 lm/W 70 lm/W	•	•	5999-4-3-289-XX 5999-4-5-289-XX
	19 W	7°	3000 K 3000 K	1280 lm 1280 lm	67 lm/W 67 lm/W	•	•	5999-4-3-286-XX 5999-4-5-286-XX
 COB	36 W	24°	2700 K	3660 lm	101 lm/W	•		5999-B-3-506-XX
			3000 K	3850 lm	106 lm/W	•		5999-B-3-887-XX
			4000 K	4000 lm	111 lm/W	•		5999-B-3-891-XX
			2700 K	3660 lm	101 lm/W		•	5999-B-5-506-XX
			3000 K	3850 lm	106 lm/W		•	5999-B-5-887-XX
			4000 K	4000 lm	111 lm/W		•	5999-B-5-891-XX
		33°	2700 K	3410 lm	94 lm/W	•		5999-C-3-506-XX
			3000 K	3590 lm	99 lm/W	•		5999-C-3-887-XX
			4000 K	3720 lm	103 lm/W	•		5999-C-3-891-XX
			2700 K	3410 lm	94 lm/W		•	5999-C-5-506-XX
			3000 K	3590 lm	99 lm/W		•	5999-C-5-887-XX
			4000 K	3720 lm	103 lm/W		•	5999-C-5-891-XX
	36 W	55°	2700 K	3190 lm	88 lm/W	•		5999-D-3-506-XX
			3000 K	3360 lm	93 lm/W	•		5999-D-3-887-XX
			4000 K	3480 lm	96 lm/W	•		5999-D-3-891-XX
			2700 K	3190 lm	88 lm/W		•	5999-D-5-506-XX
			3000 K	3360 lm	93 lm/W		•	5999-D-5-887-XX
			4000 K	3480 lm	96 lm/W		•	5999-D-5-891-XX
		87°	2700 K	3390 lm	94 lm/W	•		5999-E-3-506-XX
			3000 K	3570 lm	99 lm/W	•		5999-E-3-887-XX
			4000 K	3700 lm	102 lm/W	•		5999-E-3-891-XX
			2700 K	3390 lm	94 lm/W		•	5999-E-5-506-XX
			3000 K	3570 lm	99 lm/W		•	5999-E-5-887-XX
			4000 K	3700 lm	102 lm/W		•	5999-E-5-891-XX
	49 W	24°	2700 K	5350 lm	109 lm/W	•		5999-B-3-505-XX
			3000 K	5650 lm	115 lm/W	•		5999-B-3-902-XX
			4000 K	5850 lm	119 lm/W	•		5999-B-3-905-XX
			2700 K	5350 lm	109 lm/W		•	5999-B-5-505-XX
			3000 K	5650 lm	115 lm/W		•	5999-B-5-902-XX
			4000 K	5850 lm	119 lm/W		•	5999-B-5-905-XX
		33°	2700 K	4980 lm	101 lm/W	•		5999-C-3-505-XX
			3000 K	5260 lm	107 lm/W	•		5999-C-3-902-XX
			4000 K	5440 lm	111 lm/W	•		5999-C-3-905-XX
			2700 K	4980 lm	101 lm/W		•	5999-C-5-505-XX
			3000 K	5260 lm	107 lm/W		•	5999-C-5-902-XX
			4000 K	5440 lm	111 lm/W		•	5999-C-5-905-XX
	49 W	55°	2700 K	4660 lm	95 lm/W	•		5999-D-3-505-XX
			3000 K	4920 lm	100 lm/W	•		5999-D-3-902-XX
			4000 K	5090 lm	103 lm/W	•		5999-D-3-905-XX
			2700 K	4660 lm	95 lm/W		•	5999-D-5-505-XX
			3000 K	4920 lm	100 lm/W		•	5999-D-5-902-XX
			4000 K	5090 lm	103 lm/W		•	5999-D-5-905-XX
		87°	2700 K	4950 lm	101 lm/W	•		5999-E-3-505-XX
			3000 K	5230 lm	106 lm/W	•		5999-E-3-902-XX
			4000 K	5410 lm	110 lm/W	•		5999-E-3-905-XX
			2700 K	4950 lm	101 lm/W		•	5999-E-5-505-XX
			3000 K	5230 lm	106 lm/W		•	5999-E-5-902-XX
			4000 K	5410 lm	110 lm/W		•	5999-E-5-905-XX

