

CORE

- WALL SURFACE MOUNT
- CEILING RECESSED
- CEILING MOUNT
- BOLLARD




Content
by Application



Content
by Family

Characterized by clean and clear-cut lines **CORE** is a family of square wall light, ceiling light, bollard and pole lights. **CORE** is available in two sizes and equipped with COB LED / High Power LED in three color temperatures with exceptional color consistency. The computer-aided-design of the parabolic reflector provides efficient light emission and distribution.

The housing is dust and water protected through the extensive engineering design and testing. **CORE** is recommended to illuminate columns, facades, walkways and various architectural design works. The pole lights give a great level of downward light with symmetric, asymmetric or side throw light distributions.



www.unilamp.co.th/en/p/core



Infortar Office Building, Tallinn – ESTONIA



Specification


- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum and extruded aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Weather proof TPE grommet.
- Installation must be carried out according to the enclosed product manual.

Available Color



***Custom colors are available on request.*

CORE

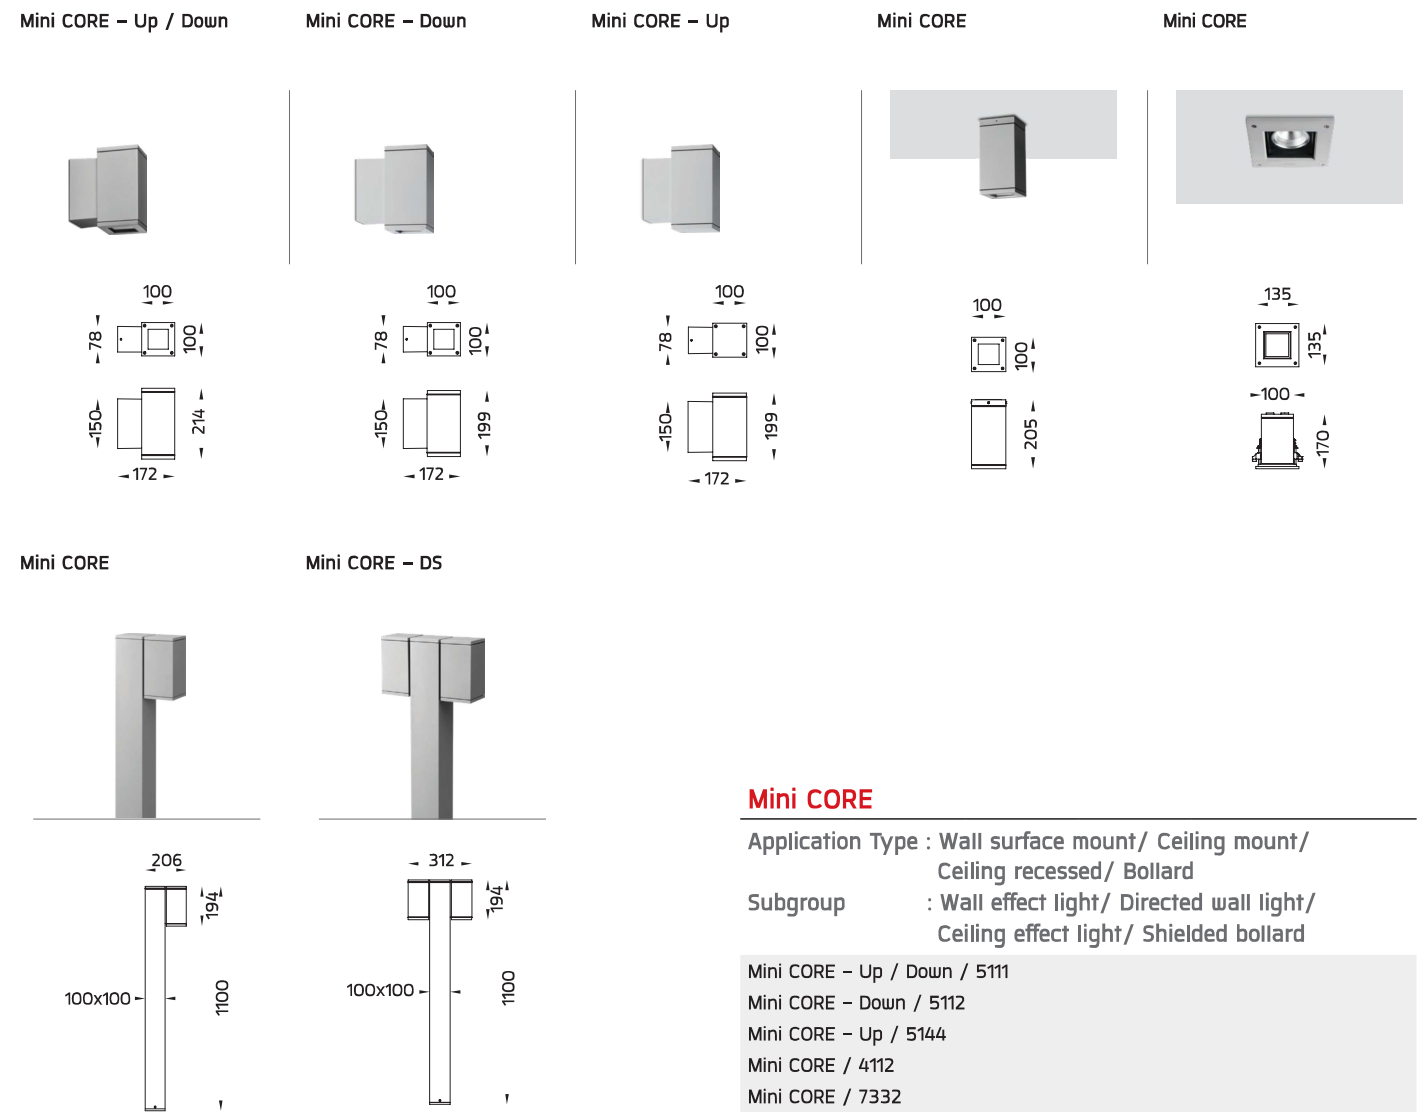


Mini CORE

Application Type : Wall surface mount/ Ceiling mount/
Ceiling recessed/ Bollard
Subgroup : Wall effect light/ Directed wall light/
Ceiling effect light/ Shielded bollard

- Mini CORE – Up / Down / 5111
- Mini CORE – Down / 5112
- Mini CORE – Up / 5144
- Mini CORE / 4112
- Mini CORE / 7332
- Mini CORE / 7146
- Mini CORE – DS / 7147

Luminaire Performance
160 – 3160 lm
10 – 32 W
15 – 124 lm/W

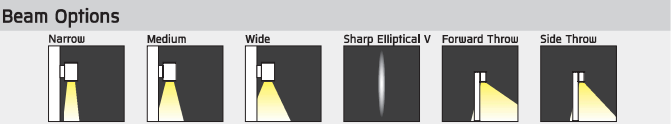

Color Temperature
2700K/ 3000K/ 4000K

Controller
On–Off/ 1–10V/ DALI/ CASAMBI

Input Options
220–240Vac 50/60Hz

Accessories

Anchor bolt


Pre-wired Cable




Fashion Island, Bangkok – THAILAND




Maxi CORE – Up / Down




Maxi CORE – Down




Maxi CORE – Up



Maxi Core

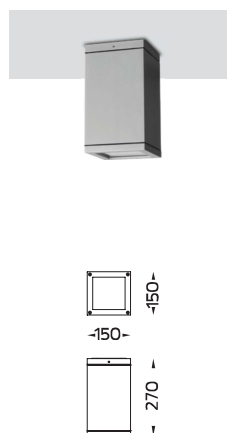

Maxi CORE

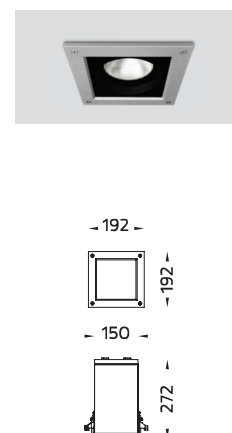

Mini CORE

Application Type : Wall surface mount/ Ceiling mount/
Ceiling recessed

Subgroup : Directed wall light/

Maxi CORE – Up / Down / 5101

Maxi CORE – Down / 5102

Maxi CORE – Up / 5145

Maxi Core / 4102

Maxi CORE / 7322

Luminaire Performance

1330 – 9400 lm

20 – 72 W

63 – 130 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On–Off/ 1–10V/ DALI

On–Off [AC LED]

Input Options

220–240Vac 50/60Hz

Accessories




Glare Shield
Ring



Anchor bolt



Pre-wired
Cable

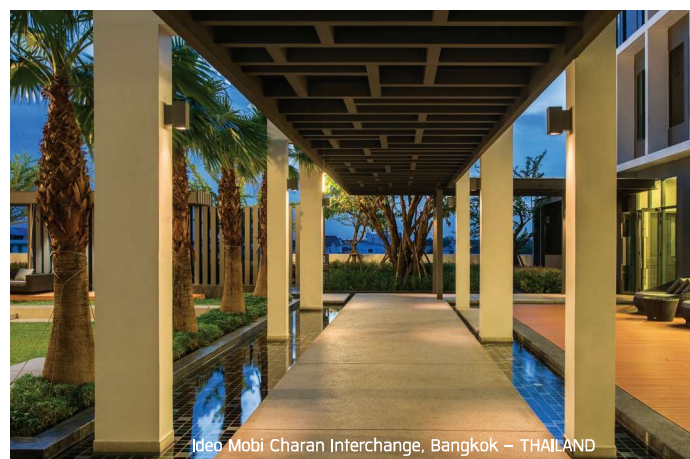

Ideo Mobi Charan Interchange, Bangkok – THAILAND

CORE

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code
Mini CORE Up / Down	OD-5111	19 W	Sharp Elliptical V	2700 K	320 lm	16 lm/W	•					5111-Q-3-646-XX
				3000 K	320 lm	16 lm/W	•					5111-Q-3-647-XX
				4000 K	340 lm	17 lm/W	•					5111-Q-3-648-XX
				2700 K	320 lm	16 lm/W			•			5111-Q-4-646-XX
				3000 K	320 lm	16 lm/W			•			5111-Q-4-647-XX
				4000 K	340 lm	17 lm/W			•			5111-Q-4-648-XX
				2700 K	320 lm	16 lm/W				•		5111-Q-5-646-XX
				3000 K	320 lm	16 lm/W				•		5111-Q-5-647-XX
				4000 K	340 lm	17 lm/W				•		5111-Q-5-648-XX
		27 W	13°	2700 K	2720 lm	100 lm/W	•					5111-A-3-503-XX
				3000 K	2860 lm	105 lm/W	•					5111-A-3-901-XX
				4000 K	2990 lm	110 lm/W	•					5111-A-3-904-XX
				2700 K	2720 lm	100 lm/W			•			5111-A-4-503-XX
				3000 K	2860 lm	105 lm/W			•			5111-A-4-901-XX
				4000 K	2990 lm	110 lm/W			•			5111-A-4-904-XX
				2700 K	2720 lm	100 lm/W				•		5111-A-5-503-XX
				3000 K	2860 lm	105 lm/W				•		5111-A-5-901-XX
				4000 K	2990 lm	110 lm/W				•		5111-A-5-904-XX
		27 W	20°	2700 K	2640 lm	97 lm/W	•					5111-B-3-503-XX
				3000 K	2780 lm	102 lm/W	•					5111-B-3-901-XX
				4000 K	2910 lm	107 lm/W	•					5111-B-3-904-XX
				2700 K	2640 lm	97 lm/W			•			5111-B-4-503-XX
				3000 K	2780 lm	102 lm/W			•			5111-B-4-901-XX
				4000 K	2910 lm	107 lm/W			•			5111-B-4-904-XX
				2700 K	2640 lm	97 lm/W				•		5111-B-5-503-XX
				3000 K	2780 lm	102 lm/W				•		5111-B-5-901-XX
				4000 K	2910 lm	107 lm/W				•		5111-B-5-904-XX
		27 W	50°	2700 K	2430 lm	90 lm/W	•					5111-D-3-503-XX
				3000 K	2560 lm	94 lm/W	•					5111-D-3-901-XX
				4000 K	2680 lm	99 lm/W	•					5111-D-3-904-XX
				2700 K	2430 lm	90 lm/W			•			5111-D-4-503-XX
				3000 K	2560 lm	94 lm/W			•			5111-D-4-901-XX
				4000 K	2680 lm	99 lm/W			•			5111-D-4-904-XX
				2700 K	2430 lm	90 lm/W				•		5111-D-5-503-XX
				3000 K	2560 lm	94 lm/W				•		5111-D-5-901-XX
				4000 K	2680 lm	99 lm/W				•		5111-D-5-904-XX
		28 W	Sharp Elliptical V	2700 K	460 lm	16 lm/W	•					5111-Q-3-630-XX
				3000 K	460 lm	16 lm/W	•					5111-Q-3-644-XX
				4000 K	490 lm	17 lm/W	•					5111-Q-3-645-XX
				2700 K	460 lm	16 lm/W			•			5111-Q-4-630-XX
				3000 K	460 lm	16 lm/W			•			5111-Q-4-644-XX
				4000 K	490 lm	17 lm/W			•			5111-Q-4-645-XX
				2700 K	460 lm	16 lm/W				•		5111-Q-5-630-XX
				3000 K	460 lm	16 lm/W				•		5111-Q-5-644-XX
				4000 K	490 lm	17 lm/W				•		5111-Q-5-645-XX
		29 W	13°	3000 K	3000 lm	103 lm/W	•					5111-5-3-901-XX
				4000 K	3160 lm	108 lm/W	•					5111-5-3-904-XX
				3000 K	3000 lm	103 lm/W			•			5111-5-4-901-XX
		29 W	26°	3000 K	2980 lm	102 lm/W	•					5111-6-3-901-XX
				4000 K	3120 lm	107 lm/W	•					5111-6-3-904-XX
				3000 K	2980 lm	102 lm/W			•			5111-6-4-901-XX
		29 W	42°	3000 K	2680 lm	92 lm/W	•					5111-7-3-901-XX
				4000 K	2820 lm	97 lm/W	•					5111-7-3-904-XX
Mini CORE Down	OD-5112	10 W	Sharp Elliptical V	2700 K	160 lm	16 lm/W	•					5112-Q-3-646-XX
				3000 K	160 lm	16 lm/W	•					5112-Q-3-647-XX
				4000 K	170 lm	17 lm/W	•					5112-Q-3-648-XX
				2700 K	160 lm	16 lm/W			•			5112-Q-4-646-XX
				3000 K	160 lm	16 lm/W			•			5112-Q-4-647-XX
				4000 K	170 lm	17 lm/W			•			5112-Q-4-648-XX
				2700 K	160 lm	16 lm/W				•		5112-Q-5-646-XX
				3000 K	160 lm	16 lm/W				•		5112-Q-5-647-XX
				4000 K	170 lm	17 lm/W				•		5112-Q-5-648-XX
		14 W	13°	2700 K	1340 lm	95 lm/W	•					5112-A-3-503-XX
				3000 K	1410 lm	100 lm/W	•					5112-A-3-901-XX
				4000 K	1470 lm	105 lm/W	•					5112-A-3-904-XX
				2700 K	1340 lm	95 lm/W			•			5112-A-4-503-XX
				3000 K	1410 lm	100 lm/W			•			5112-A-4-901-XX
				4000 K	1470 lm	105 lm/W			•			5112-A-4-904-XX
				2700 K	1340 lm	95 lm/W				•		5112-A-5-503-XX
				3000 K	1410 lm	100 lm/W				•		5112-A-5-901-XX
				4000 K	1470 lm	105 lm/W				•		5112-A-5-904-XX
		14 W	20°	2700 K	1300 lm	92 lm/W	•					5112-B-3-503-XX
				3000 K	1370 lm	97 lm/W	•					5112-B-3-901-XX
				4000 K	1430 lm	102 lm/W	•					5112-B-3-904-XX
				2700 K	1300 lm	92 lm/W			•			5112-B-4-503-XX
				3000 K	1370 lm	97 lm/W			•			5112-B-4-901-XX
				4000 K	1430 lm	102 lm/W			•			5112-B-4-904-XX
				2700 K	1300 lm	92 lm/W				•		5112-B-5-503-XX
				3000 K	1370 lm	97 lm/W				•		5112-B-5-901-XX
				4000 K	1430 lm	102 lm/W				•		5112-B-5-904-XX

*Please contact sales team for special request.

Mini CORE
Down

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code
OD-5112 	14 W	50°	2700 K	1260 lm	90 lm/W	•					5112-D-3-503-XX
			3000 K	1330 lm	95 lm/W	•					5112-D-3-901-XX
			4000 K	1390 lm	99 lm/W	•					5112-D-3-904-XX
			2700 K	1260 lm	90 lm/W			•			5112-D-4-503-XX
			3000 K	1330 lm	95 lm/W			•			5112-D-4-901-XX
			4000 K	1390 lm	99 lm/W			•			5112-D-4-904-XX
		13°	2700 K	1260 lm	90 lm/W				•		5112-D-5-503-XX
			3000 K	1330 lm	95 lm/W				•		5112-D-5-901-XX
			4000 K	1390 lm	99 lm/W				•		5112-D-5-904-XX
			3000 K	1500 lm	100 lm/W	•					5112-5-3-901-XX
			4000 K	1580 lm	105 lm/W	•					5112-5-3-904-XX
			3000 K	1500 lm	100 lm/W				•		5112-5-5-901-XX
			4000 K	1580 lm	105 lm/W				•		5112-5-5-904-XX
	15 W	26°	3000 K	1490 lm	99 lm/W	•					5112-6-3-901-XX
			4000 K	1560 lm	104 lm/W	•					5112-6-3-904-XX
	15 W	42°	3000 K	1340 lm	89 lm/W	•					5112-7-3-901-XX
			4000 K	1410 lm	94 lm/W	•					5112-7-3-904-XX
	15 W	Sharp Elliptical V	2700 K	230 lm	15 lm/W	•					5112-Q-3-630-XX
			3000 K	230 lm	15 lm/W	•					5112-Q-3-644-XX
			4000 K	240 lm	16 lm/W	•					5112-Q-3-645-XX
			2700 K	230 lm	15 lm/W			•			5112-Q-4-630-XX
			3000 K	230 lm	15 lm/W			•			5112-Q-4-644-XX
			4000 K	240 lm	16 lm/W			•			5112-Q-4-645-XX
			2700 K	230 lm	15 lm/W				•		5112-Q-5-630-XX
			3000 K	230 lm	15 lm/W				•		5112-Q-5-644-XX
			4000 K	240 lm	16 lm/W				•		5112-Q-5-645-XX

Mini CORE
Up

OD-5144 	10 W	Sharp Elliptical V	2700 K	160 lm	16 lm/W	•					5144-Q-3-646-XX
			3000 K	160 lm	16 lm/W	•					5144-Q-3-647-XX
			4000 K	170 lm	17 lm/W	•					5144-Q-3-648-XX
			2700 K	160 lm	16 lm/W			•			5144-Q-4-646-XX
			3000 K	160 lm	16 lm/W			•			5144-Q-4-647-XX
			4000 K	170 lm	17 lm/W			•			5144-Q-4-648-XX
			2700 K	160 lm	16 lm/W				•		5144-Q-5-646-XX
			3000 K	160 lm	16 lm/W				•		5144-Q-5-647-XX
			4000 K	170 lm	17 lm/W				•		5144-Q-5-648-XX
	14 W	13°	2700 K	1340 lm	95 lm/W	•					5144-A-3-503-XX
			3000 K	1410 lm	100 lm/W	•					5144-A-3-901-XX
			4000 K	1470 lm	105 lm/W	•					5144-A-3-904-XX
			2700 K	1340 lm	95 lm/W			•			5144-A-4-503-XX
			3000 K	1410 lm	100 lm/W			•			5144-A-4-901-XX
			4000 K	1470 lm	105 lm/W			•			5144-A-4-904-XX
			2700 K	1340 lm	95 lm/W				•		5144-A-5-503-XX
			3000 K	1410 lm	100 lm/W				•		5144-A-5-901-XX
			4000 K	1470 lm	105 lm/W				•		5144-A-5-904-XX
	14 W	20°	2700 K	1300 lm	92 lm/W	•					5144-B-3-503-XX
			3000 K	1370 lm	97 lm/W	•					5144-B-3-901-XX
			4000 K	1430 lm	102 lm/W	•					5144-B-3-904-XX
			2700 K	1300 lm	92 lm/W			•			5144-B-4-503-XX
			3000 K	1370 lm	97 lm/W			•			5144-B-4-901-XX
			4000 K	1430 lm	102 lm/W			•			5144-B-4-904-XX
			2700 K	1300 lm	92 lm/W				•		5144-B-5-503-XX
			3000 K	1370 lm	97 lm/W				•		5144-B-5-901-XX
			4000 K	1430 lm	102 lm/W				•		5144-B-5-904-XX
	14 W	50°	2700 K	1260 lm	90 lm/W	•					5144-D-3-503-XX
			3000 K	1330 lm	95 lm/W	•					5144-D-3-901-XX
			4000 K	1390 lm	99 lm/W	•					5144-D-3-904-XX
			2700 K	1260 lm	90 lm/W			•			5144-D-4-503-XX
			3000 K	1330 lm	95 lm/W			•			5144-D-4-901-XX
			4000 K	1390 lm	99 lm/W			•			5144-D-4-904-XX
			2700 K	1260 lm	90 lm/W				•		5144-D-5-503-XX
			3000 K	1330 lm	95 lm/W				•		5144-D-5-901-XX
			4000 K	1390 lm	99 lm/W				•		5144-D-5-904-XX
	15 W	13°	3000 K	1500 lm	100 lm/W	•					5144-5-3-901-XX
			3000 K	1500 lm	100 lm/W				•		5144-5-5-901-XX
		26°	3000 K	1490 lm	99 lm/W	•					5144-6-3-901-XX
			3000 K	1340 lm	89 lm/W	•					5144-7-3-901-XX
		42°	2700 K	230 lm	15 lm/W	•					5144-Q-3-630-XX
			3000 K	230 lm	15 lm/W	•					5144-Q-3-644-XX
	15 W	Sharp Elliptical V	4000 K	240 lm	16 lm/W	•					5144-Q-3-645-XX
			2700 K	230 lm	15 lm/W			•			5144-Q-4-630-XX
			3000 K	230 lm	15 lm/W			•			5144-Q-4-644-XX
			4000 K	240 lm	16 lm/W			•			5144-Q-4-645-XX
			2700 K	230 lm	15 lm/W				•		5144-Q-5-630-XX
			3000 K	230 lm	15 lm/W				•		5144-Q-5-644-XX
			4000 K	240 lm	16 lm/W				•		5144-Q-5-645-XX

CORE

Mini CORE

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code
											
OD-4112 	10 W	Sharp Elliptical V	2700 K	200 lm	20 lm/W	•					4112-Q-3-646-XX
			3000 K	200 lm	20 lm/W	•					4112-Q-3-647-XX
			4000 K	210 lm	21 lm/W	•					4112-Q-3-648-XX
			2700 K	200 lm	20 lm/W			•			4112-Q-4-646-XX
			3000 K	200 lm	20 lm/W			•			4112-Q-4-647-XX
			4000 K	210 lm	21 lm/W			•			4112-Q-4-648-XX
			2700 K	200 lm	20 lm/W				•		4112-Q-5-646-XX
			3000 K	200 lm	20 lm/W				•		4112-Q-5-647-XX
			4000 K	210 lm	21 lm/W				•		4112-Q-5-648-XX
			4000 K	1470 lm	105 lm/W				•		4112-A-5-904-XX
			2700 K	1300 lm	92 lm/W	•					4112-B-3-503-XX
			3000 K	1370 lm	97 lm/W	•					4112-B-3-901-XX
			4000 K	1430 lm	102 lm/W	•					4112-B-3-904-XX
	14 W	20°	2700 K	1300 lm	92 lm/W			•			4112-B-4-503-XX
			3000 K	1370 lm	97 lm/W			•			4112-B-4-901-XX
			4000 K	1430 lm	102 lm/W			•			4112-B-4-904-XX
			2700 K	1300 lm	92 lm/W				•		4112-B-5-503-XX
			3000 K	1370 lm	97 lm/W				•		4112-B-5-901-XX
			4000 K	1430 lm	102 lm/W				•		4112-B-5-904-XX
			2700 K	1260 lm	90 lm/W	•					4112-D-3-503-XX
			3000 K	1330 lm	95 lm/W	•					4112-D-3-901-XX
			4000 K	1390 lm	99 lm/W	•					4112-D-3-904-XX
			2700 K	1260 lm	90 lm/W			•			4112-D-4-503-XX
			3000 K	1330 lm	95 lm/W			•			4112-D-4-901-XX
			4000 K	1390 lm	99 lm/W			•			4112-D-4-904-XX
	15 W	50°	2700 K	1260 lm	90 lm/W				•		4112-D-5-503-XX
			3000 K	1330 lm	95 lm/W				•		4112-D-5-901-XX
			4000 K	1390 lm	99 lm/W				•		4112-D-5-904-XX
			2700 K	1430 lm	95 lm/W					•	4112-5-5-503-XX
			3000 K	1500 lm	100 lm/W	•					4112-5-3-901-XX
			2700 K	1420 lm	94 lm/W	•					4112-6-3-503-XX
			3000 K	1490 lm	99 lm/W	•					4112-6-3-901-XX
			3000 K	1490 lm	99 lm/W				•		4112-6-5-901-XX
			2700 K	1280 lm	85 lm/W	•					4112-7-3-503-XX
			3000 K	1340 lm	89 lm/W	•					4112-7-3-901-XX
			4000 K	1410 lm	94 lm/W	•					4112-7-3-904-XX
	15 W	Sharp Elliptical V	2700 K	280 lm	18 lm/W	•					4112-Q-3-630-XX
			3000 K	280 lm	18 lm/W	•					4112-Q-3-644-XX
			4000 K	300 lm	20 lm/W	•					4112-Q-3-645-XX
			2700 K	280 lm	18 lm/W			•			4112-Q-4-630-XX
			3000 K	280 lm	18 lm/W			•			4112-Q-4-644-XX
			4000 K	300 lm	20 lm/W			•			4112-Q-4-645-XX
			2700 K	280 lm	18 lm/W				•		4112-Q-5-630-XX
			3000 K	280 lm	18 lm/W				•		4112-Q-5-644-XX
			4000 K	300 lm	20 lm/W				•		4112-Q-5-645-XX
OD-7332 	10 W	Sharp Elliptical V	2700 K	200 lm	20 lm/W	•					7332-Q-3-646-XX
			3000 K	200 lm	20 lm/W	•					7332-Q-3-647-XX
			4000 K	210 lm	21 lm/W	•					7332-Q-3-648-XX
			2700 K	200 lm	20 lm/W			•			7332-Q-4-646-XX
			3000 K	200 lm	20 lm/W			•			7332-Q-4-647-XX
			4000 K	210 lm	21 lm/W			•			7332-Q-4-648-XX
			2700 K	200 lm	20 lm/W				•		7332-Q-5-646-XX
			3000 K	200 lm	20 lm/W				•		7332-Q-5-647-XX
			4000 K	210 lm	21 lm/W				•		7332-Q-5-648-XX
	14 W	13°	2700 K	1570 lm	112 lm/W	•					7332-A-3-503-XX
			3000 K	1660 lm	118 lm/W	•					7332-A-3-901-XX
			4000 K	1740 lm	124 lm/W	•					7332-A-3-904-XX
			2700 K	1570 lm	112 lm/W			•			7332-A-4-503-XX
			3000 K	1660 lm	118 lm/W			•			7332-A-4-901-XX
			4000 K	1740 lm	124 lm/W			•			7332-A-4-904-XX
			2700 K	1570 lm	112 lm/W				•		7332-A-5-503-XX
			3000 K	1660 lm	118 lm/W				•		7332-A-5-901-XX
			4000 K	1740 lm	124 lm/W				•		7332-A-5-904-XX
	14 W	20°	2700 K	1510 lm	107 lm/W	•					7332-B-3-503-XX
			3000 K	1590 lm	113 lm/W	•					7332-B-3-901-XX
			4000 K	1660 lm	118 lm/W	•					7332-B-3-904-XX
			2700 K	1510 lm	107 lm/W			•			7332-B-4-503-XX
			3000 K	1590 lm	113 lm/W			•			7332-B-4-901-XX
			4000 K	1660 lm	118 lm/W			•			7332-B-4-904-XX
			2700 K	1510 lm	107 lm/W				•		7332-B-5-503-XX
			3000 K	1590 lm	113 lm/W				•		7332-B-5-901-XX
			4000 K	1660 lm	118 lm/W				•		7332-B-5-904-XX

Mini CORE

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code
										CASAMBI	
OD-7332 	14 W	50°	2700 K	1430 lm	102 lm/W	•					7332-D-3-503-XX
			3000 K	1510 lm	107 lm/W	•					7332-D-3-901-XX
			4000 K	1580 lm	112 lm/W	•					7332-D-3-904-XX
			2700 K	1430 lm	102 lm/W			•			7332-D-4-503-XX
			3000 K	1510 lm	107 lm/W			•			7332-D-4-901-XX
			4000 K	1580 lm	112 lm/W			•			7332-D-4-904-XX
			2700 K	1430 lm	102 lm/W				•		7332-D-5-503-XX
			3000 K	1510 lm	107 lm/W				•		7332-D-5-901-XX
			4000 K	1580 lm	112 lm/W				•		7332-D-5-904-XX
		13°	3000 K	1500 lm	100 lm/W			•			7332-5-4-901-XX
		26°	3000 K	1490 lm	99 lm/W	•					7332-6-3-901-XX
	15 W	42°	3000 K	1340 lm	89 lm/W	•					7332-7-3-901-XX
			4000 K	1410 lm	94 lm/W	•					7332-7-3-904-XX
			3000 K	1340 lm	89 lm/W			•			7332-7-4-901-XX
	15 W	Sharp Elliptical V	2700 K	280 lm	18 lm/W	•					7332-Q-3-630-XX
			3000 K	280 lm	18 lm/W	•					7332-Q-3-644-XX
			4000 K	300 lm	20 lm/W	•					7332-Q-3-645-XX
			2700 K	280 lm	18 lm/W			•			7332-Q-4-630-XX
			3000 K	280 lm	18 lm/W			•			7332-Q-4-644-XX
			4000 K	300 lm	20 lm/W			•			7332-Q-4-645-XX
			2700 K	280 lm	18 lm/W				•		7332-Q-5-630-XX
			3000 K	280 lm	18 lm/W				•		7332-Q-5-644-XX
			4000 K	300 lm	20 lm/W				•		7332-Q-5-645-XX
OD-7146 	14 W	13°	2700 K	1340 lm	95 lm/W	•					7146-A-3-503-XX
			3000 K	1410 lm	100 lm/W	•					7146-A-3-901-XX
			4000 K	1470 lm	105 lm/W	•					7146-A-3-904-XX
		20°	2700 K	1300 lm	92 lm/W	•					7146-B-3-503-XX
			3000 K	1370 lm	97 lm/W	•					7146-B-3-901-XX
			4000 K	1430 lm	102 lm/W	•					7146-B-3-904-XX
		50°	2700 K	1260 lm	90 lm/W	•					7146-D-3-503-XX
			3000 K	1330 lm	95 lm/W	•					7146-D-3-901-XX
			4000 K	1390 lm	99 lm/W	•					7146-D-3-904-XX
	15 W	13°	3000 K	1500 lm	100 lm/W	•					7146-5-3-901-XX
		26°	3000 K	1490 lm	99 lm/W	•					7146-6-3-901-XX
		42°	3000 K	1340 lm	89 lm/W	•					7146-7-3-901-XX
	16 W	Forward throw	2700 K	920 lm	57 lm/W					•	7146-J-A-528-XX
			3000 K	920 lm	57 lm/W					•	7146-J-A-529-XX
			4000 K	980 lm	61 lm/W					•	7146-J-A-530-XX
		Side throw	2700 K	940 lm	58 lm/W					•	7146-I-A-528-XX
			3000 K	940 lm	58 lm/W					•	7146-I-A-529-XX
			4000 K	1000 lm	62 lm/W					•	7146-I-A-530-XX
OD-7147 	28 W	13°	2700 K	2680 lm	95 lm/W	•					7147-A-3-503-XX
			3000 K	2820 lm	100 lm/W	•					7147-A-3-901-XX
			4000 K	2950 lm	105 lm/W	•					7147-A-3-904-XX
		20°	2700 K	2600 lm	92 lm/W	•					7147-B-3-503-XX
			3000 K	2740 lm	97 lm/W	•					7147-B-3-901-XX
			4000 K	2870 lm	102 lm/W	•					7147-B-3-904-XX
		50°	2700 K	2530 lm	90 lm/W	•					7147-D-3-503-XX
			3000 K	2660 lm	95 lm/W	•					7147-D-3-901-XX
			4000 K	2780 lm	99 lm/W	•					7147-D-3-904-XX
	32 W	Forward throw	2700 K	1840 lm	57 lm/W					•	7147-J-A-528-XX
			3000 K	1840 lm	57 lm/W					•	7147-J-A-529-XX
			4000 K	1960 lm	61 lm/W					•	7147-J-A-530-XX
		Side throw	2700 K	1880 lm	58 lm/W					•	7147-I-A-528-XX
			3000 K	1880 lm	58 lm/W					•	7147-I-A-529-XX
			4000 K	2000 lm	62 lm/W					•	7147-I-A-530-XX
OD-5101 	40 W	10°	4000 K	3000 lm	75 lm/W		•				5101-5-3-874-XX
		16°	3000 K	2540 lm	63 lm/W		•				5101-6-3-873-XX
		38°	3000 K	2800 lm	70 lm/W		•				5101-7-3-873-XX
			4000 K	2940 lm	73 lm/W		•				5101-7-3-874-XX
		Asymmetric	3000 K	2700 lm	67 lm/W		•				5101-9-3-873-XX
			4000 K	2840 lm	71 lm/W		•				5101-9-3-874-XX
	60 W	47°	3000 K	4680 lm	78 lm/W		•				5101-7-3-877-XX
			4000 K	4920 lm	82 lm/W		•				5101-7-3-878-XX
		Asymmetric	3000 K	4520 lm	75 lm/W		•				5101-9-3-877-XX
	72 W	12°	3000 K	9180 lm	127 lm/W	•					5101-5-3-902-XX
			4000 K	9400 lm	130 lm/W	•					5101-5-3-905-XX
			3000 K	9180 lm	127 lm/W			•			5101-5-4-902-XX
		23°	4000 K	9180 lm	127 lm/W			•			5101-6-4-905-XX
			4000 K	7880 lm	109 lm/W	•					5101-7-3-905-XX
		48°	4000 K	7880 lm	109 lm/W			•			5101-7-4-905-XX
			4000 K	6540 lm	90 lm/W	•					5101-9-3-905-XX

Mini CORE DS

Maxi CORE Up / Down

CORE

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code
Maxi CORE Down		20 W	38°	3000 K	1400 lm	70 lm/W		•				5102-7-3-873-XX
			Asymmetric	3000 K	1350 lm	67 lm/W		•				5102-9-3-873-XX
		26 W	23°	3000 K	3220 lm	123 lm/W	•					5102-6-3-887-XX
			48°	3000 K	2760 lm	106 lm/W	•					5102-7-3-887-XX
			Asymmetric	3000 K	2400 lm	92 lm/W	•					5102-9-3-887-XX
				4000 K	2460 lm	94 lm/W	•					5102-9-3-891-XX
		30 W	Asymmetric	3000 K	2260 lm	75 lm/W		•				5102-9-3-877-XX
			12°	3000 K	4790 lm	119 lm/W				•		5102-5-5-902-XX
		40 W	23°	3000 K	4680 lm	117 lm/W	•					5102-6-3-902-XX
			48°	4000 K	4120 lm	103 lm/W	•					5102-7-3-905-XX
			Asymmetric	3000 K	3590 lm	89 lm/W	•					5102-9-3-902-XX
Maxi CORE Up		20 W	38°	3000 K	1400 lm	70 lm/W		•				5145-7-3-873-XX
		26 W	48°	3000 K	2760 lm	106 lm/W	•					5145-7-3-887-XX
		40 W	12°	3000 K	4790 lm	119 lm/W				•		5145-5-5-902-XX
Maxi Core		20 W	16°	4000 K	1330 lm	66 lm/W		•				4102-6-3-874-XX
			38°	3000 K	1400 lm	70 lm/W		•				4102-7-3-873-XX
			12°	2700 K	2950 lm	113 lm/W				•		4102-5-5-506-XX
			23°	3000 K	2950 lm	113 lm/W	•					4102-6-3-887-XX
		26 W	48°	3000 K	2730 lm	105 lm/W	•					4102-7-3-887-XX
			Asymmetric	4000 K	2800 lm	107 lm/W	•					4102-7-3-891-XX
				3000 K	2340 lm	78 lm/W		•				4102-7-3-877-XX
		30 W	47°	4000 K	2460 lm	82 lm/W		•				4102-7-3-878-XX
			23°	4000 K	4390 lm	109 lm/W	•					4102-6-3-905-XX
		40 W	48°	4000 K	4070 lm	101 lm/W	•					4102-7-3-905-XX
			Asymmetric	4000 K	3690 lm	92 lm/W	•					4102-9-3-905-XX
OD-7322		20 W	10°	4000 K	1500 lm	75 lm/W		•				7322-5-3-874-XX
			38°	3000 K	1400 lm	70 lm/W		•				7322-7-3-873-XX
		26 W	48°	3000 K	2760 lm	106 lm/W	•					7322-7-3-887-XX
			Asymmetric	3000 K	2400 lm	92 lm/W	•					7322-9-3-887-XX
		30 W	47°	3000 K	2340 lm	78 lm/W		•				7322-7-3-877-XX
		40 W	23°	3000 K	4680 lm	117 lm/W	•					7322-6-3-902-XX
			48°	3000 K	4010 lm	100 lm/W	•					7322-7-3-902-XX
			Asymmetric	3000 K	3590 lm	89 lm/W	•					7322-9-3-902-XX

