


COLOSSEO 90 ROUND TRIMLESS

ORDERING CODE: RO44

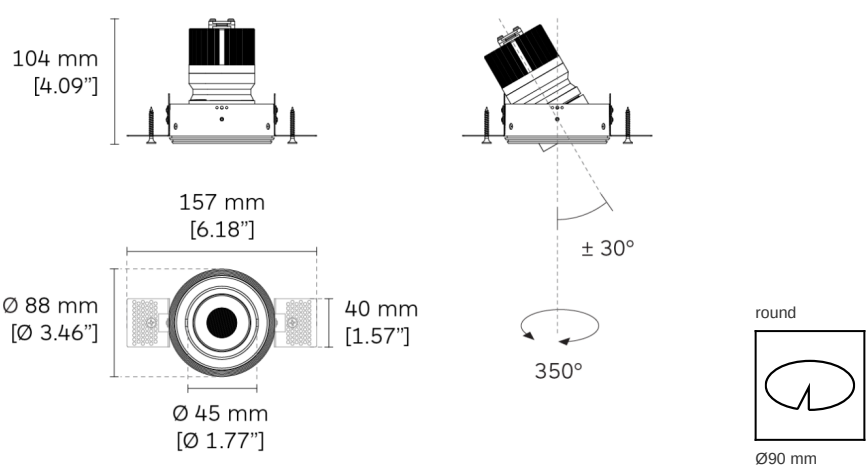

DESCRIPTION

Colosseo Round series fully adjustable luminaire designed to accommodate any recessed lighting applications. Round-shaped mounting trim in cast aluminum with spring for trim installation or brackets for trimless installation on a ceiling thickness 6-15mm. Colosseo is available in three sizes with light head diameters of 75mm, 90mm and 120mm, vertical tiltable $\pm 30^\circ$. Luminaire body inclusive of snoot-in cast aluminum, Easy relamping via removable front ring by snap-in catch action.

MOUNTING

Recessed

DIMMING OPTIONS

- ☐ D0 - No Dimming
- ☐ DC - CASAMBI
- ☐ DA - Dali Dim
- ☐ D1 - 0-10V Dim
- ☐ DP - Phase Dim

FINISH

- ☐ 54 - Embossed matt white RAL 9016
- ☐ 65 - Embossed matt black RAL 9017
- ☐ 11 - White RAL 9003
- ☐ 10 - Black RAL 9004
- ☐ 1Y - Embossed matt total white RAL 9016

LIGHT SOURCE CODE	CRI	CCT	NOMINAL LUMEN	*DELIVERED LUMEN (MIN.&MAX.)	LED POWER (W)	SYSTEM POWER(W)	BEAM ANGLE (BA°)	*CANDELA (CD)
☐ JC03	90	☐ 27 - 2700K	- 1079 lm	- 825 to 849 lm	12	13.5	☐ 10°	- 19,925.00
		☐ 30 - 3000K	- 1110 lm	- 849 to 873 lm			☐ 18°	- 8,186.00
		☐ 35 - 3500K	- 1163 lm	- 890 to 915 lm				
		☐ 40 - 4000K	- 1235 lm	- 945 to 972 lm				

LIGHT SOURCE CODE	CRI	CCT	NOMINAL LUMEN	*DELIVERED LUMEN (MIN.&MAX.)	LED POWER (W)	SYSTEM POWER(W)	BEAM ANGLE (BA°)	*CANDELA (CD)
☐ JC03	97	☐ 27 - 2700K	- 851 lm	- 651 to 669 lm	12	13.5	☐ 10°	- 18,902.00
		☐ 30 - 3000K	- 1053 lm	- 806 to 828 lm			☐ 18°	- 7,766.00
		☐ 35 - 3500K	- 1119 lm	- 856 to 880 lm				
		☐ 40 - 4000K	- 1124 lm	- 860 to 884 lm				

LIGHT SOURCE CODE	CRI	CCT	NOMINAL LUMEN	*DELIVERED LUMEN (MIN.&MAX.)	LED POWER (W)	SYSTEM POWER(W)	BEAM ANGLE (BA°)	*CANDELA (CD)
☐ JC03	90	☐ 27 - 2700K	- 1324 lm	- 1158 to 1177 lm	10	12	☐ 25°	- 6,513.00
		☐ 30 - 3000K	- 1342 lm	- 1174 to 1193 lm			☐ 34°	- 3,725.00
		☐ 35 - 3500K	- 1381 lm	- 1208 to 1228 lm				
		☐ 40 - 4000K	- 1435 lm	- 1255 to 1276 lm				

COLOSSEO 90 ROUND TRIMLESS

ORDERING CODE: RO44

LIGHT SOURCE CODE	CRI	CCT		NOMINAL LUMEN		*DELIVERED LUMEN (MIN.&MAX.)	LED POWER (W)	SYSTEM POWER(W)	BEAM ANGLE (BA°)	*CANDELA (CD)
☐ JC03	97	☐ 27 - 2700K	-	1175 lm	-	1028 to 1045 lm	10	12	☐ 25°	- 5,926.00
		☐ 30 - 3000K	-	1221 lm	-	1068 to 1085 lm			☐ 34°	- 3,389.00
		☐ 35 - 3500K	-	1312 lm	-	1147 to 1166 lm				
		☐ 40 - 4000K	-	1347 lm	-	1178 to 1197 lm				

*The Candela (cd) values are based on 3000K. Lumen output will vary based on the CCT and beam angle.
For specific values, please download the data sheet after creating your desired configuration in the code options chart.