

EUROPRISMA


Technical datasheet

Emergency Lighting
Ref. EHIDL-200C




-25°C | Temperatura de funcionamiento
Operation temperature

Dimensions (mm):

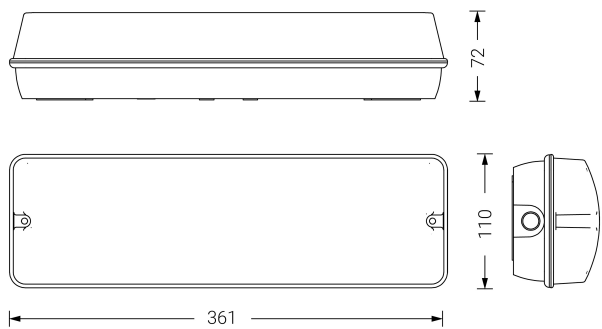

Photometric data:

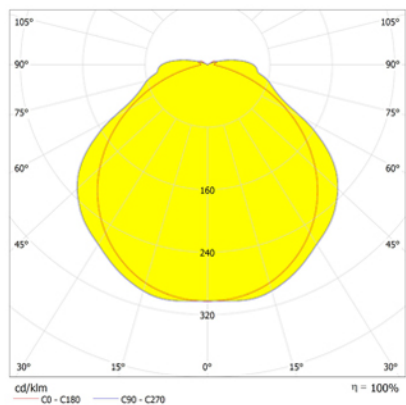

UNE 60598-2-22
230V 50/60HZ

Emergency Lighting: EUROPRISMA. Reference: EHIDL-200C, manufactured by Normalux. Lumens 240 lm. Autonomy (h) 1h. Operating mode: Maintained - Non Maintained. Installation: Surface Mounting. Light source: Led. Battery of: Ni-Cd 4,8V/750mAh. IP: 65. IK: 10. Version: DALI. Color: White. Casing: Polycarbonate. Voltage: 230V 50/60Hz. Dimensions (mm): 361 x 109 x 72 mm. Manufactured according to UNE 60598-2-22 regulations.

Lumens	240 lm
Color temperatures (K)	5700
Light source	Led
Autonomy (h)	1h
Battery	Ni-Cd 4,8V/750mAh
Charging	max. 24 h
Power (W)	7W
Operating mode	Maintained - Non Maintained
Class	II
IP	65
IK	10
Operating temperature (°C)	-25 to 20
Remote control	Yes