



EUROTYPE FLANGED RECESSED TRACK WITH DALI SUPPORT - L: 1000    ORDERING CODE: 2D66

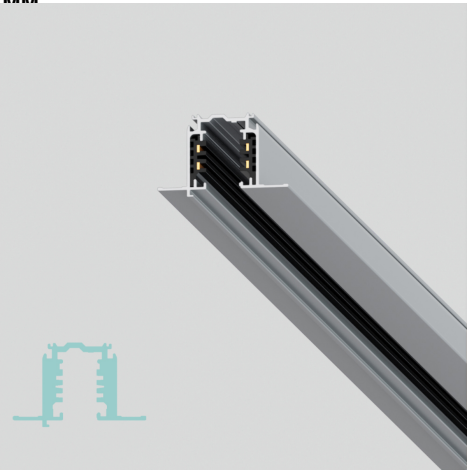

DESCRIPTION

Three circuit main-voltage track system with Data Bus. Track in extruded aluminium fitted with four 16A rolled copper conductors and 2 conductors for Data signal housed in extruded insulated black thermoplastic. Equipped with three separately controllable current circuit. Completed of a vast range of accessories to fit to the needs of any specific project.

NOTES

Connection to the 220-250V single-phase mains: 16A overall load, corresponding to 3500/4000 VA over the three circuits.

MOUNTING

Track

DIMMING OPTIONS

00 - No Driver

FINISH













- 10 - Black RAL 9004
- 11 - White RAL 9003
- 54 - Embossed matt white RAL 9016
- 65 - Embossed matt black RAL 9017
- 75 - Grey (RAL 9006)

LIGHT SOURCE CODE	CRI	CCT	NOMINAL LUMEN	DELIVERED LUMEN	LED POWER (W)	SYSTEM POWER(W)	BEAM ANGLE (BA°)
0000	00	00 - No light source	00 lm	- lm	00	0	00°

\*The Candela (cd) values are based on 3000K.

EUROTYPE FLANGED RECESSED TRACK WITH DALI SUPPORT - L: 1000 MM ORDERING CODE: 2D66

ACCESSORIES

	Mechanical Coupler	2105
	Wire Hanger	2108
	L Connector - Right for Recessed track	2D79
	L Connector - Left for Recessed track	2D80
	T Connector - Right for Recessed track	2D81
	T Connector - Left for Recessed track	2D82
	X Connector for Recessed track	2D84
	Concealed Connector	2F35
	Feeder - Right for Recessed track	2G39
	Feeder - Left for Recessed track	2G40
	Flexible Connector for Recessed track	2G41
	End Cap	2104

NOTES:  
Connection to the 220-250V single-phase mains: 16A overall load, corresponding to 3500/4000 VA over the three circuits.