



EUROTYPE SURFACE MOUNTED TRACK WITH DALI SUPPORT - L: 1000

ORDERING CODE: 2D65

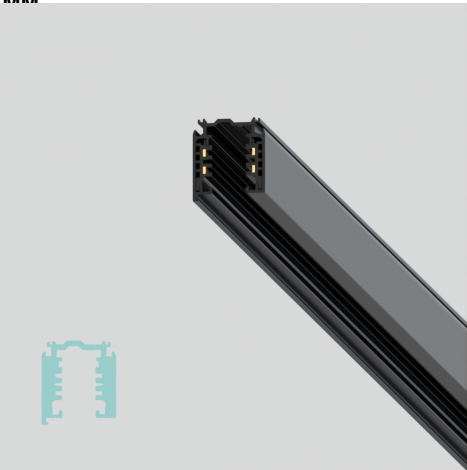

DESCRIPTION

Three circuit main-voltage track system with Data Bus. Track in extruded aluminium fitted with four 16A rolled copper conductors and 2 conductors for Data signal housed in extruded insulated black thermoplastic. Equipped with three separately controllable current circuit. Completed of a vast range of accessories to fit to the needs of any specific project.

NOTES

Connection to the 220-250V single-phase mains: 16A overall load, corresponding to 3500/4000 VA over the three circuits.













| MOUNTING | DIMMING OPTIONS | FINISH |
|----------|-----------------|-----------------------------------|
| Track | 00 - No Driver | 10 - Black RAL 9004 |
| | | 11 - White RAL 9003 |
| | | 54 - Embossed matt white RAL 9016 |
| | | 65 - Embossed matt black RAL 9017 |
| | | 75 - Grey (RAL 9006) |

| LIGHT SOURCE CODE | CRI | CCT | NOMINAL LUMEN | DELIVERED LUMEN | LED POWER (W) | SYSTEM POWER(W) | BEAM ANGLE (BA°) |
|-------------------|-----|----------------------|---------------|-----------------|---------------|-----------------|------------------|
| 0000 | 00 | 00 - No light source | 00 lm | - lm | 00 | 0 | 00° |

*The Candela (cd) values are based on 3000K.

EUROTYPE SURFACE MOUNTED TRACK WITH DALI SUPPORT - L: 1000 MM ORDERING CODE: 2D65

ACCESSORIES

| | | |
|--|---------------------------------------|------|
|  | Mechanical Coupler | 2105 |
|  | Ceiling Bracket | 2106 |
|  | L Connector - Right for Surface track | 2D72 |
|  | L Connector - Left for Surface track | 2D73 |
|  | T Connector - Right for Surface track | 2D77 |
|  | T Connector - Left for Surface track | 2D78 |
|  | Flexible Connector for Surface track | 2D76 |
|  | X Connector for Surface track | 2D83 |
|  | Concealed Connector | 2F35 |
|  | Feeder - Right for Surface track | 2G37 |
|  | Feeder - Left for Surface track | 2G38 |
|  | End Cap | 2104 |

NOTES:
Connection to the 220-250V single-phase mains: 16A overall load, corresponding to 3500/4000 VA over the three circuits.