

Grafo

Technical datasheet


Outdoor lighting
Ref. GGD03




Wall



Dimensions (mm):

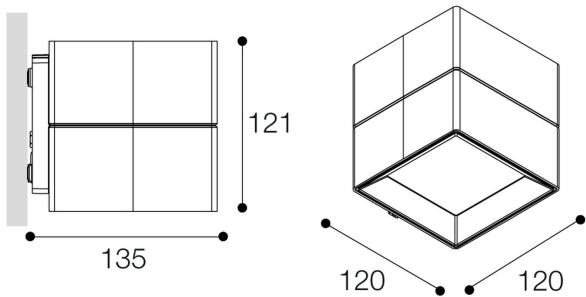

Photometric data:

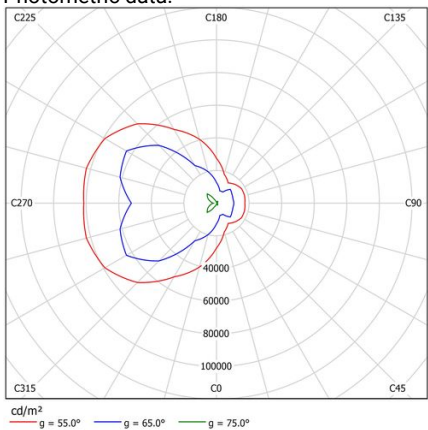

* The manufacturer reserves the right to make changes in the design and / or technical specifications.
* Guarantee expendable to 5 years depending of the project. Consult conditions.



Outdoor lighting: Grafo.Made from die-cast aluminium with NG-PROTECT treatment, ensuring corrosion resistance (including salt spray), in accordance with ISO 9227. Suitable for C5 environments according to ISO 9223:2012. Diffuser: Clear glass. Light distribution: Directa. Color: Dark Grey.

Gross lumen output	705 lm
Net lumen output	607 lm
Color temperatures (K)	3000
CRI	80
Hours Life L80B10	50.000h
Hours Life L70B10	50.000h
Macadam ellipses	3
Photobiological security	1
Power consumption (W)	6,5
Power (W)	5,9
Voltage	220-240V 50/60Hz
Power factor	0,95
Class	I
BUG rating	B0 U0 G0
IP	65
IK	07
Weight (Kg)	1,5
Operating temperature (°C)	-20 to 40
Energy efficiency	B

* Variable UGR according to project
* Photobiological safety = 0/1: Risk free

