




Dimensions (mm):


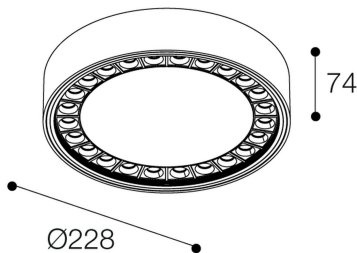


Outdoor lighting: Monem. Made from die-cast aluminium with NG-PROTECT treatment, ensuring corrosion resistance (including salt spray), in accordance with ISO 9227. Suitable for C5 environments according to ISO 9223:2012. Diffuser: Clear glass. Light distribution: Directa. Color: Dark Grey.

Gross lumen output	3050 lm
Net lumen output	2501 lm
Color temperatures (K)	4000
CRI	80
Hours Life L80B10	50.000h
Hours Life L70B10	50.000h
Macadam ellipses	3
Beam angle	20
Photobiological security	1
Power consumption (W)	24,5
Power (W)	22,3
Voltage	220-240V 50/60Hz
Power factor	0,95
Class	I
BUG rating	B1 U0 G1
IP	65
IK	05
Weight (Kg)	0,9
Operating temperature (°C)	-30 to 45
Energy efficiency	B

* Variable UGR according to project
* Photobiological safety = 0/1: Risk free

Photometric data:

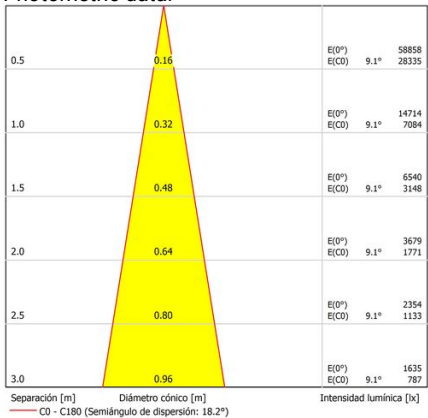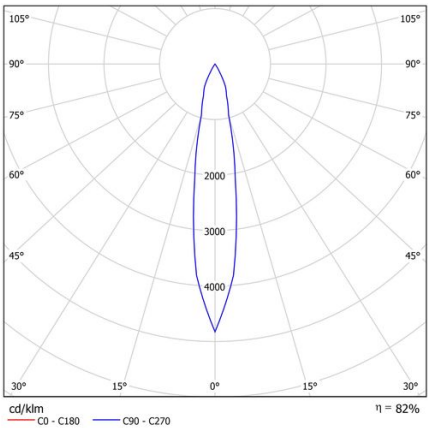

* The manufacturer reserves the right to make changes in the design and / or technical specifications.
* Guarantee expendable to 5 years depending of the project. Consult conditions.