




LED High Bay Light

Instruction Manual




Installation Instructions

Physical Dimensions(mm)




1.

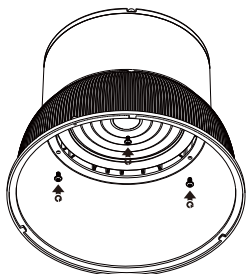


Install the Anti-glare diffuser body to LED high bay with 3 supplied screws.

2.

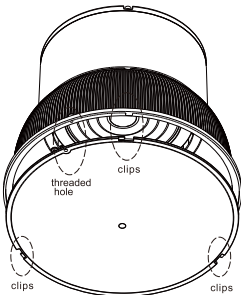


Put the clips and threaded hole to matching positions.

3.

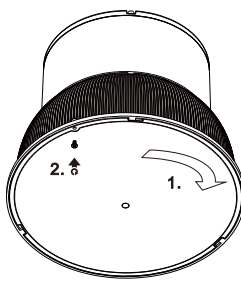

Push the cover in clockwise direction to make the clips locked tight, fasten the diffuser body and cover with the supplied screw.

Loop Mounting

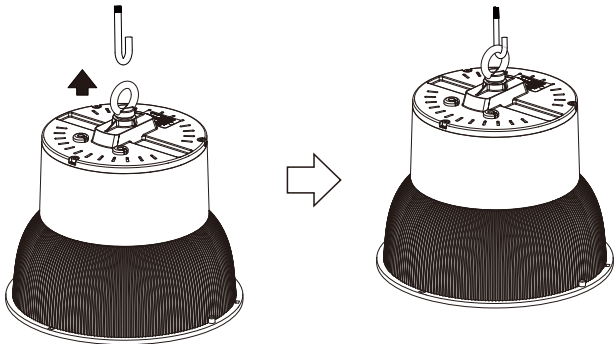

Product Specifications	30W	50W	75W
Input Voltage	100-277VAC / 120-277 VAC / 100-240VAC / 220-240VAC (Subject to the input voltage on nameplate)		
Power Frequency	50 / 60 Hz		
Outlook Dimensions	Ø278x276mm(Ø10.95"×10.87")		
Net Weight	2.5±0.3kg(5.51±0.66Lbs)		
Working Temperature	-30°C to + 50°C(-22°F to +122°F)		
Storing Temperature	-40°C to +70°C(-40°F to +158°F)		

Dimmable

DIM+/DA1	purple	or	purple	or	blue	or	brown	or	black	or	red
DIM-/DA2	gray		pink		white		blue		gray		orange
DIM+/DA1	purple		purple		purple		purple		purple		
DIM-/DA2	gray	or	pink	or	gray	or	pink		pink		
Aux 12Vdc +	pink		black/white	or	black/white		red		red		
DIM+/DA1	purple		purple		purple		purple		purple		
DIM-/DA2	gray		pink		pink		pink		pink		
Aux 12Vdc +	pink	or	black/white	or	black/white		red		red		
Aux 12Vdc -	black/white		blue/white	or	orange		orange		orange		
L	brown		black		black		black		black		
N	blue		white		white		white		white		
⓪GND	yellow/green		green		green		green		green		



Warning! do not wire dim cord to high voltage, or dim function will fail.

•if the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.