


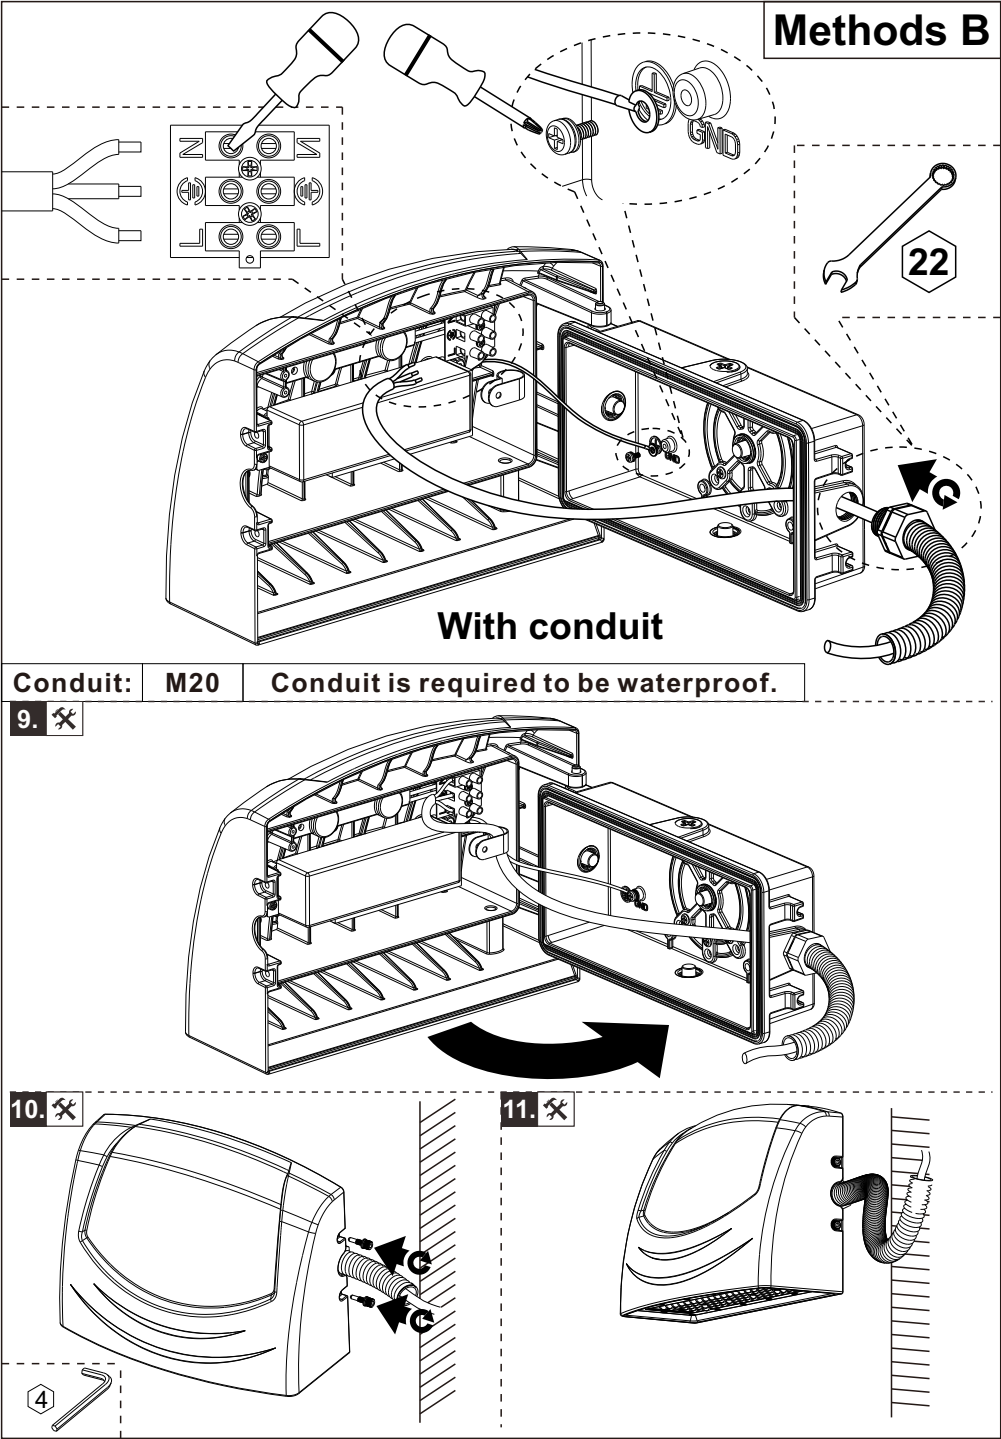

Reminder

We appreciate your purchase!
Please read the instruction manual before installation and keep it for future reference.

Warning

1. To avoid damage, falling, electric shock or fire, please do not modify the lamp or replace accessories without confirming with the supplier first.
2. Please authorize only qualified personnel to install the lamp and ensure they follow the instruction manual. Any improper installation might cause falling, electric shock, fire, or other injury, damage or hazard.
3. Please disconnect power before installation or any maintenance of the lamp.
4. Please disconnect power if it begins to smoke or emit odors, since fire or electric shock may occur. Ask qualified person to inspect and maintain the luminaire.
5. Please do not dismantle the lamp without the supplier's authorization.
6. Please do not touch the power supply when the lamp is operating.
7. If the external flexible cable or conduit of the luminaire is damaged, it should only be replaced by the supplier, a service agent or qualified person.
8. Conduit connector not included. The electrical fitting must be installed by a licensed electrician.
9. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
10. Only to be installed outside arms reach.
11. For use in environments where an accumulation of non-conductive dust on the luminaire may be expected.
12. Mounting heights of lights not higher than 30m.

Caution risk of electric shock



Application

With unique high-purity die-cast aluminum heat sink, high-brightness SMD chip, high-efficiency constant current and constant voltage power driver, the LED Wall Pack Light is designed for hotels, guesthouses, supermarkets, shopping malls, brand stores, conference rooms, leisure, entertainment, office space, exhibition halls, restaurants, furniture and other places.

Technical Parameters

Product Specifications	40W	70W
Input Voltage	AC100-240V / AC200-240V / AC100-277V / AC277-480V	
Power Frequency	50 / 60Hz	
Outlook Dimensions	296 x 150 x 223mm (11.65" x 5.9" x 8.8")	
Luminaire Net Weight	3.9±0.3kg (8.60±0.66Lbs)	4.0±0.3kg (8.82±0.66Lbs)
Working Temperature	-30°C to +50°C (-22°F to +122°F)	
Storing Temperature	-40°C to +70°C (-40°F to +158°F)	

Installation Instructions

Wall Mounting

