


KF6 SERIES
FIXED RECESSED DOWNLIGHT



Flush Reflector



Recessed Reflector

Technical Data

- Cut Out 150mm
- Overall 165mm
- Height 148mm
- Suitable ceiling 10-50mm
- Weight - body 850g
- Weight - driver 250g
- LED life @ L90/B10 ≥75000 Hrs
- AS/NZS60598 - parts 1&2 Complies
- IK10/IP65 anti-ligature lens option
- Wall wash option
- Emergency option
- Adaption plate 150-250mm
- Ultra CRI 97, R9 98 option on request
- Tunable white 2700-6500K option on request
- DALI 8 Tunable White (350-900mA)
- Casambi (350-1050mA)

SERIES	CRI	OUTPUT	REFLECTOR	CCT	CONTROL	LENS	COLOUR
KF6 Fixed Recessed Downlight	P CRI 80 R9 15 3 SDCM	2 10W 250mA 1300lm 130lm/W (IC-4)	8F Wide Beam 70° Flush Reflector	3 3000K	BLANK Non Dim	BLANK No Lens 70° / 30° Beam UGR22, IP6X*	W White
	X CRI 90 R9 55 2 SDCM (Cyanosis compliant with 4000K)	3 14W 350mA 1800lm 129lm/W (IC-4)	8R Wide Beam 70° Recessed Reflector	35 3500K (CRI90 only)	D1 DALI (250-1400mA)	C Clear Lens 70° / 30° Beam UGR22, IP65*	B Black
	U CRI 97 R9 98 2 SDCM Cyanosis compliant with 4000K)	5 20W 500mA 2500lm 125lm/W (CA90)	4F Narrow Beam 30° Flush Reflector	4 4000K	D3 1-10V (250-1400mA)	D Diffusion Lens 100° Beam UGR22, IP65*	S Special
		7 27W 700mA 3500lm 130m/W (CA90)	4R Narrow Beam 30° Recessed Reflector		D4 Phase Cutting (180-1050mA)	P Prismatic Lens 55° Beam UGR16 / UGR19^, IP65*	
		9 35W 900mA 4300lm 123lm/W (CA90)			D5 O4A: Switch (350-1400mA)	R Red Lens 70° / 30° Beam IP65*	
		10 40W 1050mA 5000lm 125lm/W (CA90)			D6 Push (250-1400mA)	G Green Lens 70° / 30° Beam IP65*	
		14 56W 1400mA 6500lm 116lm/W (Do Not Cover)			D7 O4A: DALI (350-1400mA)	B Blue Lens 70° / 30° Beam IP65*	

*Downlight without lens is IP6X from below and above ceiling. Downlight with lens installed on site is IP54 from below and IP44 from above ceiling. Downlight with lens installed in factory is IP65 from below and IP44 from above ceiling. ^UGR16 capable with Recessed Reflector and Prismatic Lens, UGR19 capable with Flush Reflector and Prismatic Lens.

KF6 SERIES

Accessories



Wide Beam Reflector
70° Beam, UGR22, IP6X*

Narrow Beam Reflector
30° Beam, UGR22, IP6X*



Wide Beam Reflector + Clear Lens
70° Beam, UGR22, IP65*

Wide Beam Reflector + Diffusion Lens
100° Beam, UGR22, IP65*

Wide Beam Reflector + Prismatic Lens
55° Beam, UGR16 / UGR19^, IP65*






*Downlight without lens is IP6X from below and above ceiling. Downlight with lens installed on site is IP54 from below and IP44 from above ceiling. Downlight with lens installed in factory is IP65 from below and IP44 from above ceiling. ^UGR16 capable with Recessed Reflector and Prismatic Lens, UGR19 capable with Flush Reflector and Prismatic Lens.



Adaption Plate

IK10/IP65 Anti-Ligature Options




Black Colour Option



Wide Beam Reflector + Red Lens
70° Beam, IP65*


Wide Beam Reflector + Green Lens
70° Beam, IP65*

Wide Beam Reflector + Blue Lens
70° Beam, IP65*




*Downlight without lens is IP6X from below and above ceiling, Downlight with lens installed on site is IP54 from below and IP44 from above ceiling. Downlight with lens installed in factory is IP65 from below and IP44 from above ceiling. ^UGR16 capable with Recessed Reflector and Prismatic Lens, UGR19 capable with Flush Reflector and Prismatic Lens.

KA6 SERIES
ADJUSTABLE RECESSED DOWNLIGHT



Flush Reflector

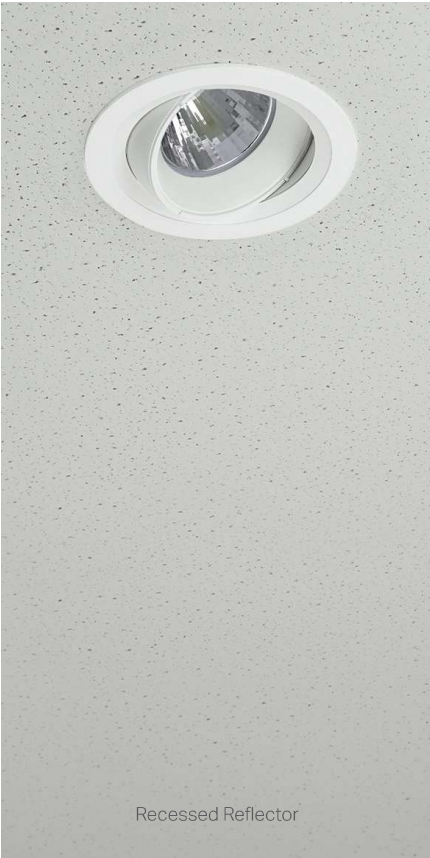

Recessed Reflector

Technical Data



- Cut Out 150mm
- Overall 165mm
- Height 160mm
- Suitable ceiling 10-50mm
- Weight - body 980g
- Weight - driver 250g
- LED life @ L90/B10 ≥ 75000 Hrs
- AS/NZS60598 - parts 1&2 Complies
- 30° tilt, 355° rotation
- Emergency option
- Adaption plate 150-250mm
- Ultra CRI 97, R9 98 option on request
- Tunable white 2700-6500K option on request
- DALI 8 Tunable White (350-900mA)
- Casambi (350-1050mA)

SERIES	CRI	OUTPUT	REFLECTOR	CCT	CONTROL	LENS	COLOUR
KA6 Adjustable Recessed Downlight	P CRI 80 R9 15 3 SDCM	2 10W 250mA 1300lm 130lm/W (IC-4)	8F Wide Beam 70° Flush Reflector	3 3000K	BLANK Non Dim	BLANK No Lens 70° / 30° Beam UGR22, IP65*	W White
	X CRI 90 R9 55 2 SDCM (Cyanosis compliant with 4000K)	3 14W 350mA 1800lm 129lm/W (IC-4)	8R Wide Beam 70° Recessed Reflector	35 3500K (CRI90 only)	D1 DALI (250-1400mA)	C Clear Lens 70° / 30° Beam UGR22, IP65*	B Black
	U CRI 97 R9 98 2 SDCM Cyanosis compliant with 4000K)	5 20W 500mA 2500lm 125lm/W (CA90)	4F Narrow Beam 30° Flush Reflector	4 4000K	D2 DSI (350-1400mA)	D Diffusion Lens 100° Beam UGR22, IP65*	S Special
		7 27W 700mA 3500lm 130m/W (CA90)	4R Narrow Beam 30° Recessed Reflector		D3 1-10V (250-1400mA)	P Prismatic Lens 55° Beam UGR16 / UGR19^, IP65*	
		9 35W 900mA 4300lm 123lm/W (CA90)			D4 Phase Cutting (180-1050mA)	R Red Lens 70° / 30° Beam IP65*	
		10 40W 1050mA 5000lm 125lm/W (CA90)			D5 04A: Switch (350-1400mA)	G Green Lens 70° / 30° Beam IP65*	
		14 56W 1400mA 6500lm 116lm/W (Do Not Cover)			D6 Push (250-1400mA)	B Blue Lens 70° / 30° Beam IP65*	
					D7 04A: DALI (350-1400mA)		

*Downlight without lens is IP6X from below and above ceiling. Downlight with lens installed on site is IP54 from below and IP44 from above ceiling. Downlight with lens installed in factory is IP65 from below and IP44 from above ceiling. ^UGR16 capable with Recessed Reflector and Prismatic Lens, UGR19 capable with Flush Reflector and Prismatic Lens.



KA6 SERIES

Accessories



Wide Beam Reflector
70° Beam, UGR22, IP6X*

Narrow Beam Reflector
30° Beam, UGR22, IP6X*







Wide Beam Reflector + Clear Lens
70° Beam, UGR22, IP65*

Wide Beam Reflector + Diffusion Lens
100° Beam, UGR22, IP65*

Wide Beam Reflector + Prismatic Lens
55° Beam, UGR16 / UGR19^, IP65*





*Downlight without lens is IP6X from below and above ceiling. Downlight with lens installed on site is IP54 from below and IP44 from above ceiling. Downlight with lens installed in factory is IP65 from below and IP44 from above ceiling. ^UGR16 capable with Recessed Reflector and Prismatic Lens, UGR19 capable with Flush Reflector and Prismatic Lens.



Wide Beam Reflector + Red Lens
70° Beam, IP65*

Wide Beam Reflector + Green Lens
70° Beam, IP65*

Wide Beam Reflector + Blue Lens
70° Beam, IP65*




*Downlight without lens is IP6X from below and above ceiling. Downlight with lens installed on site is IP54 from below and IP44 from above ceiling. Downlight with lens installed in factory is IP65 from below and IP44 from above ceiling. ^UGR16 capable with Recessed Reflector and Prismatic Lens, UGR19 capable with Flush Reflector and Prismatic Lens.



KS6

SERIES

SURFACE MOUNTED DOWNLIGHT



Flush Reflector



Recessed Reflector

Technical Data

- Overall

195mm

• Height

160mm

• Weight

1980g
- LED life @ L90/B10

≥75000 Hrs

• AS/NZS60598 - parts 1&2

Complies

• Dark/light reflector option
- Full IP65 option available

• Remote emergency option

• Ultra CRI97, R9 98 option on request

SERIES	CRI	OUTPUT	REFLECTOR	CCT	CONTROL	LENS	COLOUR
KS6 Surface Mounted Downlight	P CRI 80 R9 15 3 SDCM	2 10W 250mA 1300lm 130lm/W	8F Wide Beam 70° Flush Reflector	3 3000K	BLANK Non Dim	BLANK No Lens 70° / 30° Beam UGR22, IP54	W White
	X CRI 90 R9 55 2 SDCM (Cyanosis compliant with 4000K)	3 14W 350mA 1800lm 129lm/W	8R Wide Beam 70° Recessed Reflector	35 3500K (CRI90 only)	D1 DALI (250-1400mA)	C Clear Lens 70° / 30° Beam UGR22, IP54	B Black
	U CRI 97 R9 98 2 SDCM Cyanosis compliant with 4000K)	5 20W 500mA 2500lm 125lm/W	4F Narrow Beam 30° Flush Reflector	4 4000K	D3 1-10V (250-1400mA)	D Diffusion Lens 100° Beam UGR22, IP54	S Special
		7 27W 700mA 3500lm 130m/W	4R Narrow Beam 30° Recessed Reflector		D4 Phase Cutting (180-1050mA)	P Prismatic Lens 55° Beam UGR16 / UGR19^, IP54	
					D6 Push (250-1400mA)	R Red Lens 70° / 30° Beam IP54	
						G Green Lens 70° / 30° Beam IP54	
						B Blue Lens 70° / 30° Beam IP54	


^UGR16 capable with Recessed Reflector and Prismatic Lens, UGR19 capable with Flush Reflector and Prismatic Lens.

KS6SERIES Accessories



Wide Beam Reflector
70° Beam, UGR22, IP54

Narrow Beam Reflector
30° Beam, UGR22, IP54




Wide Beam Reflector + Clear Lens
70° Beam, UGR22, IP54

Wide Beam Reflector + Diffusion Lens
100° Beam, UGR22, IP54

Wide Beam Reflector + Prismatic Lens
55° Beam, UGR16 / UGR19^, IP54






^UGR16 capable with Recessed Reflector and Prismatic Lens, UGR19 capable with Flush Reflector and Prismatic Lens.



Wide Beam Reflector + Red Lens
70° Beam, IP54

Wide Beam Reflector + Green Lens
70° Beam, IP54

Wide Beam Reflector + Blue Lens
70° Beam, IP54



ROD / CABLE SUSPENDED DOWNLIGHT



Flush Reflector



Recessed Reflector

<ul style="list-style-type: none"> • Overall 140mm • Height 195mm • Weight 1980g 	<ul style="list-style-type: none"> • LED life @L90/B10 • AS/NZS60598- parts 1&2 • Rod length 1000-3000mm 	<ul style="list-style-type: none"> • >75000 Hrs Complies 	<ul style="list-style-type: none"> • Cable length 2000mm, can be shortened • Darklight reflector option • Full IP65 option available 	<ul style="list-style-type: none"> • Remote emergency option • Ultra CRI 97, 99 98 option on request • Adjustable base for angled ceiling up to 15° option on request
---	---	--	---	--

SERIES	CRI	OUTPUT	REFLECTOR	CCT	CONTROL	LENS	COLOUR
KR6 Rod Suspended Downlight	P CRI 80 R9 15 3 SDCM	2 10W 250mA 1300lm 130lm/W	8F Wide Beam 70° Flush Reflector	3 3000K	BLANK Non Dim	BLANK No Lens 70° / 30° Beam UGR22, IP54	W White
KC6 Cable Suspended Downlight	X CRI 90 R9 55 2 SDCM (Cyanosis compliant with 4000K)	3 14W 350mA 1800lm 129lm/W	8R Wide Beam 70° Recessed Reflector	35 3500K (CRI90 only)	D1 DALI (250-1400mA)	C Clear Lens 70° / 30° Beam UGR22, IP54	B Black
	U CRI 97 R9 98 2 SDCM Cyanosis compliant with 4000K)	5 20W 500mA 2500lm 125lm/W	4F Narrow Beam 30° Flush Reflector	4 4000K	D3 1-10V (250-1400mA)	D Diffusion Lens 100° Beam UGR22, IP54	S Special
		7 27W 700mA 3500lm 130m/W	4R Narrow Beam 30° Recessed Reflector		D4 Phase Cutting (180-1050mA)	P Prismatic Lens 55° Beam UGR16 / UGR19°, IP54	
					D6 Push (250-1400mA)	R Red Lens 70° / 30° Beam IP54	
						G Green Lens 70° / 30° Beam IP54	
						B Blue Lens 70° / 30° Beam IP54	

^AUGR16 capable with Recessed Reflector and Prismatic Lens, UGR19 capable with Flush Reflector and Prismatic Lens.

KR6 /KC6 SERIES Accessories



Wide Beam Reflector
70° Beam, UGR22, IP54

Narrow Beam Reflector
30° Beam, UGR22, IP54



Wide Beam Reflector + Clear Lens
70° Beam, UGR22, IP54

Wide Beam Reflector + Diffusion Lens
100° Beam, UGR22, IP54

Wide Beam Reflector + Prismatic Lens
55° Beam, UGR16 / UGR19^, IP54



^UGR16 capable with Recessed Reflector and Prismatic Lens, UGR19 capable with Flush Reflector and Prismatic Lens.




Wide Beam Reflector + Red Lens
70° Beam, IP54

Wide Beam Reflector + Green Lens
70° Beam, IP54

Wide Beam Reflector + Blue Lens
70° Beam, IP54



KSP6 SURFACE SERIES SPOTLIGHT



Recessed Reflector

Technical Data

- Overall 120mm
- Height 145mm
- Weight 1200g
- LED life @ L90/B10 ≥75000 Hrs
- AS/NZS60598 - parts 1&2 Complies
- 270° tilt, 355° rotation
- Dark/light reflector option
- Ultra CRI 97, R9 98 option on request

SERIES	CRI	OUTPUT	REFLECTOR	CCT	CONTROL	LENS	COLOUR
KSP6 Surface Mounted Spotlight	P CRI 80 R9 15 3 SDCM	2 10W 250mA 1300lm 130lm/W	8FS Wide Beam 70° Flush Reflector	3 3000K	BLANK Non Dim	BLANK No Lens 70° / 30° Beam UGR22, IP20	W White
	X CRI 90 R9 55 2 SDCM (Cyanosis compliant with 4000K)	3 14W 350mA 1800lm 129lm/W	8RS Wide Beam 70° Recessed Reflector	35 3500K (CRI90 only)	D1 DALI (250-1400mA)	C Clear Lens 70° / 30° Beam UGR22, IP20	B Black
	U CRI 97 R9 98 2 SDCM Cyanosis compliant with 4000K)	5 20W 500mA 2500lm 125lm/W	4FS Narrow Beam 30° Flush Reflector	4 4000K	D3 1-10V (250-1400mA)	D Diffusion Lens 100° Beam UGR22, IP20	S Special
		7 27W 700mA 3500lm 130m/W	4RS Narrow Beam 30° Recessed Reflector		D4 Phase Cutting (180-1050mA)	P Prismatic Lens 55° Beam UGR16 / UGR19^, IP20	
					D6 Push (250-1400mA)	R Red Lens 70° / 30° Beam IP20	
						G Green Lens 70° / 30° Beam IP20	
						B Blue Lens 70° / 30° Beam IP20	

^UGR16 capable with Recessed Reflector and Prismatic Lens, UGR19 capable with Flush Reflector and Prismatic Lens.

KSP6 SURFACE SERIES

Accessories



Wide Beam Reflector
70° Beam, UGR22, IP20

Narrow Beam Reflector
30° Beam, UGR22, IP20




Wide Beam Reflector + Clear Lens
70° Beam, UGR22, IP20

Wide Beam Reflector + Diffusion Lens
100° Beam, UGR22, IP20

Wide Beam Reflector + Prismatic Lens
55° Beam, UGR16 / UGR19^, IP20






^UGR16 capable with Recessed Reflector and Prismatic Lens, UGR19 capable with Flush Reflector and Prismatic Lens.




Wide Beam Reflector + Red Lens
70° Beam, IP20


Wide Beam Reflector + Green Lens
70° Beam, IP20

Wide Beam Reflector + Blue Lens
70° Beam, IP20



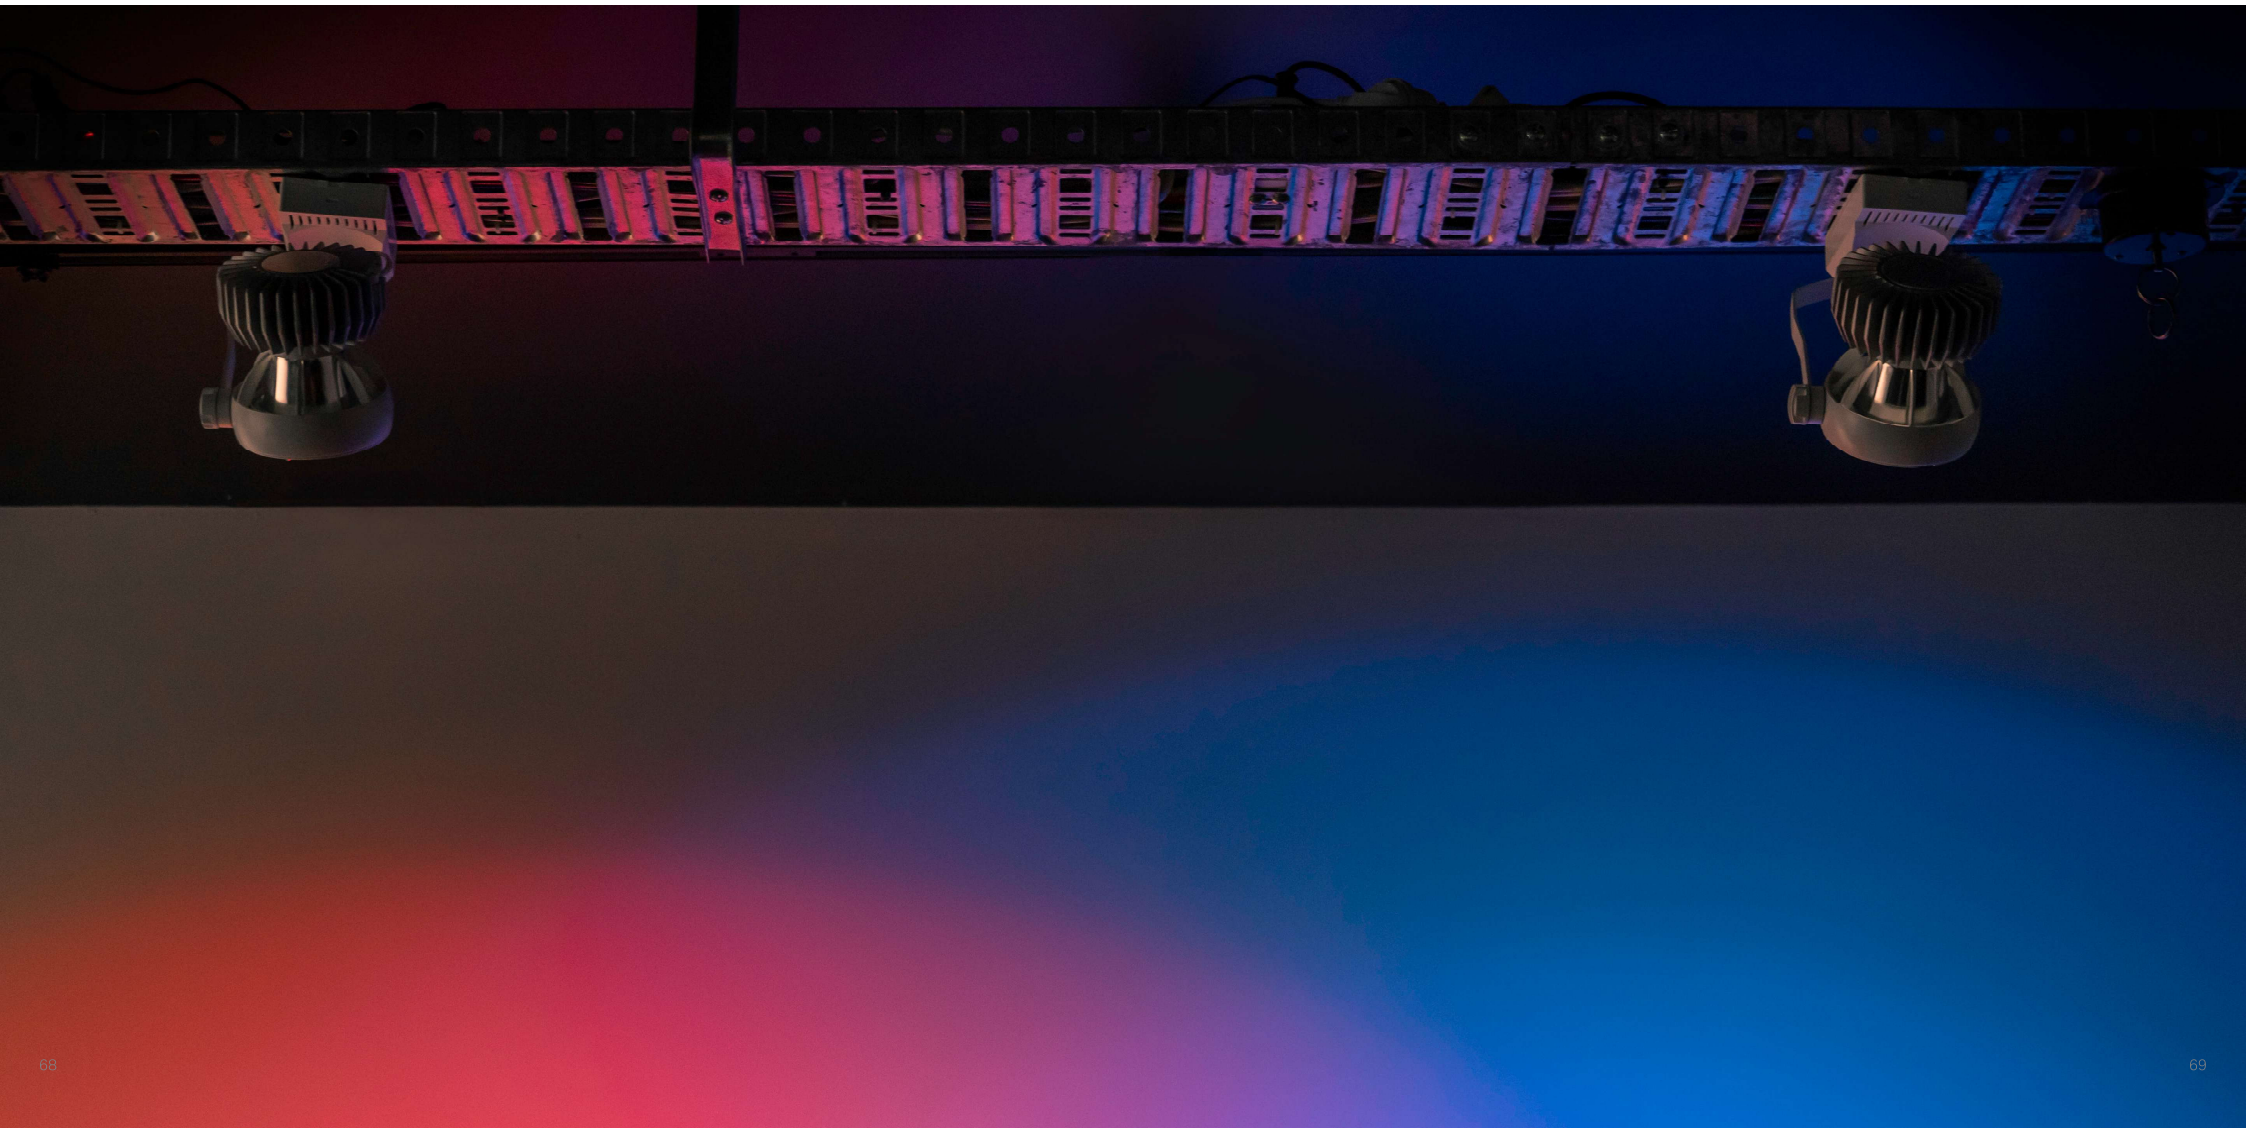

KSP6 TRACK SERIES SPOTLIGHT

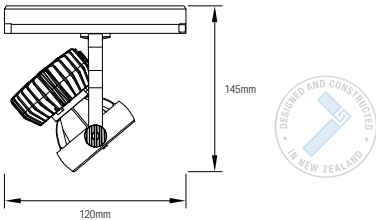

Flush Reflector



Recessed Reflector

Technical Data

- Overall 120mm
- Height 145mm
- Weight 1200g
- LED life @ L90/B10 ≥75000 Hrs
- AS/NZS60598 - parts 1&2 Complies
- 270° tilt, 355° rotation
- Dark/light reflector option
- Ultra CRI 97, R9 98 option on request

SERIES	CRI	OUTPUT	REFLECTOR	CCT	CONTROL	LENS	COLOUR
KSP6 Track Mounted Spotlight	P	2	8FT	3	BLANK	BLANK	W
	CRI 80	10W 250mA	Wide Beam 70°	3000K	Non Dim	No Lens	White
	R9 15	1300lm 130lm/W	Flush Reflector			70° / 30° Beam UGR22, IP6X	
	X	3	8RT	35	D1	C	B
	CRI 90	14W 350mA	Wide Beam 70°	3500K	DALI	Clear Lens	Black
	R9 55	1800lm 129lm/W	Recessed Reflector	(CRI90 only)	(250-1400mA)	70° / 30° Beam UGR22, IP44	
	2 SDCM						
	(Cyanosis compliant with 4000K)	5	4FT	4	D3	D	S
	U	20W 500mA	Narrow Beam 30°	4000K	1-10V	Diffusion Lens	Special
	CRI 97	2500lm 125lm/W	Flush Reflector		(250-1400mA)	100° Beam UGR22, IP44	
	R9 98	27W 700mA	4RT		D4	P	
	2 SDCM	3500lm 130m/W	Narrow Beam 30°		Phase Cutting	Prismatic Lens	
	Cyanosis compliant with 4000K)		Recessed Reflector		(180-1050mA)	55° Beam UGR16 / UGR19^, IP44	
		9			D6	R	
		35W 900mA			Push	Red Lens	
		4300lm 123lm/W (CA90)			(250-1400mA)	70° / 30° Beam IP44	
		10				G	
		40W 1050mA				Green Lens	
		5000lm 125lm/W (CA90)				70° / 30° Beam IP44	
						B	
						Blue Lens	
						70° / 30° Beam IP44	

^UGR16 capable with Recessed Reflector and Prismatic Lens, UGR19 capable with Flush Reflector and Prismatic Lens.

KSP6 TRACK SERIES

Accessories



Wide Beam Reflector
70° Beam, UGR22, IP6X

Narrow Beam Reflector
30° Beam, UGR22, IP6X





Wide Beam Reflector + Clear Lens
70° Beam, UGR22, IP44

Wide Beam Reflector + Diffusion Lens
100° Beam, UGR22, IP44

Wide Beam Reflector + Prismatic Lens
55° Beam, UGR16 / UGR19^, IP44




^UGR16 capable with Recessed Reflector and Prismatic Lens, UGR19 capable with Flush Reflector and Prismatic Lens.



Wide Beam Reflector + Red Lens
70° Beam, IP44

Wide Beam Reflector + Green Lens
70° Beam, IP44

Wide Beam Reflector + Blue Lens
70° Beam, IP44



NEW SOUTH WALES
NATIONAL HEAD OFFICE

Phone: 1300 799 300 | **Fax:** 1300 789 300
96-112 Gow Street, Padstow NSW 2211
Postal Address: PO BOX 314 Padstow NSW 2211

QUEENSLAND

Phone: 1300 799 300 | **Fax:** 1300 789 300
54 Berwick Street, Fortitude Valley QLD 4006
Postal Address: PO Box 500 Fortitude Valley
QLD 4006

VICTORIA / TASMANIA

Phone: 1300 799 300 | **Fax:** 1300 789 300
U2/20 Sabre Drive, Port Melbourne VIC 3207

SOUTH AUSTRALIA / NORTHERN TERRITORY

Phone: 1300 799 300 | **Fax:** 1300 789 300
Level 2, 191 Fullarton Road, Dulwich SA 5065

WESTERN AUSTRALIA

Phone: 1300 799 300 | **Fax:** 1300 789 300
77 Truganina Road, Malaga WA 6090
Postal Address: PO Box 2046 Malaga, WA 6944



NEW ZEALAND

Phone: 0800 454 448
Level 3, 123 Carlton Gore Road,
Newmarket, Auckland 1023