



Unilamp

NEW!

KORNER

POLE LIGHT & POLE TOP LIGHT

KORNER



www.unilamp.co.th/en/p/korner


- POLE LIGHT & POLE TOP LIGHT
- WALL MOUNT LUMINAIRE



KORNER is minimalistic linear shaped pole luminaire and wall light. The use of clear lines, closed surfaces and hidden mounting hardware provide an attractive unobtrusive appearance, and easy installation. The unique 16 stage paint process and use of virtually copper free aluminum alloys guarantee an ultra-long product lifetime. **KORNER** is suitable for medium mounting heights when using aluminum poles and high mounting heights of up to 8m in combination of steel poles. Existing circular poles can be utilized with the use of the innovative clamping system. **KORNER** uses high efficacy LED modules and CAD optimized optics. Ready for light management systems using the D4i protocol and Zhaga book 18 interface. Withstanding ambient temperatures of 50°C and electrical surges make **KORNER** applicable for most challenging environments.



* Pole is not included and has to be ordered separately



Specification

- Energy saving by offering system efficacy of 120 lm/W
- Single- or double-sided installation
- Staggered installation height possible for efficient road and walkway lighting
- Optional built-in photocell for added energy savings
- Pre-wired 8000mm long cable

Available Color


Black	(replace the last 2 digits of ordering code with 01)
Graphite	(replace the last 2 digits of ordering code with 02)
Dark Grey	(replace the last 2 digits of ordering code with 03)
Aluminium Silver	(replace the last 2 digits of ordering code with 04)
White	(replace the last 2 digits of ordering code with 06)
Wooden Brown	(replace the last 2 digits of ordering code with 07)



* Pole is not included and has to be ordered separately

• MODULAR SOLUTIONS

POLE TOP LIGHT

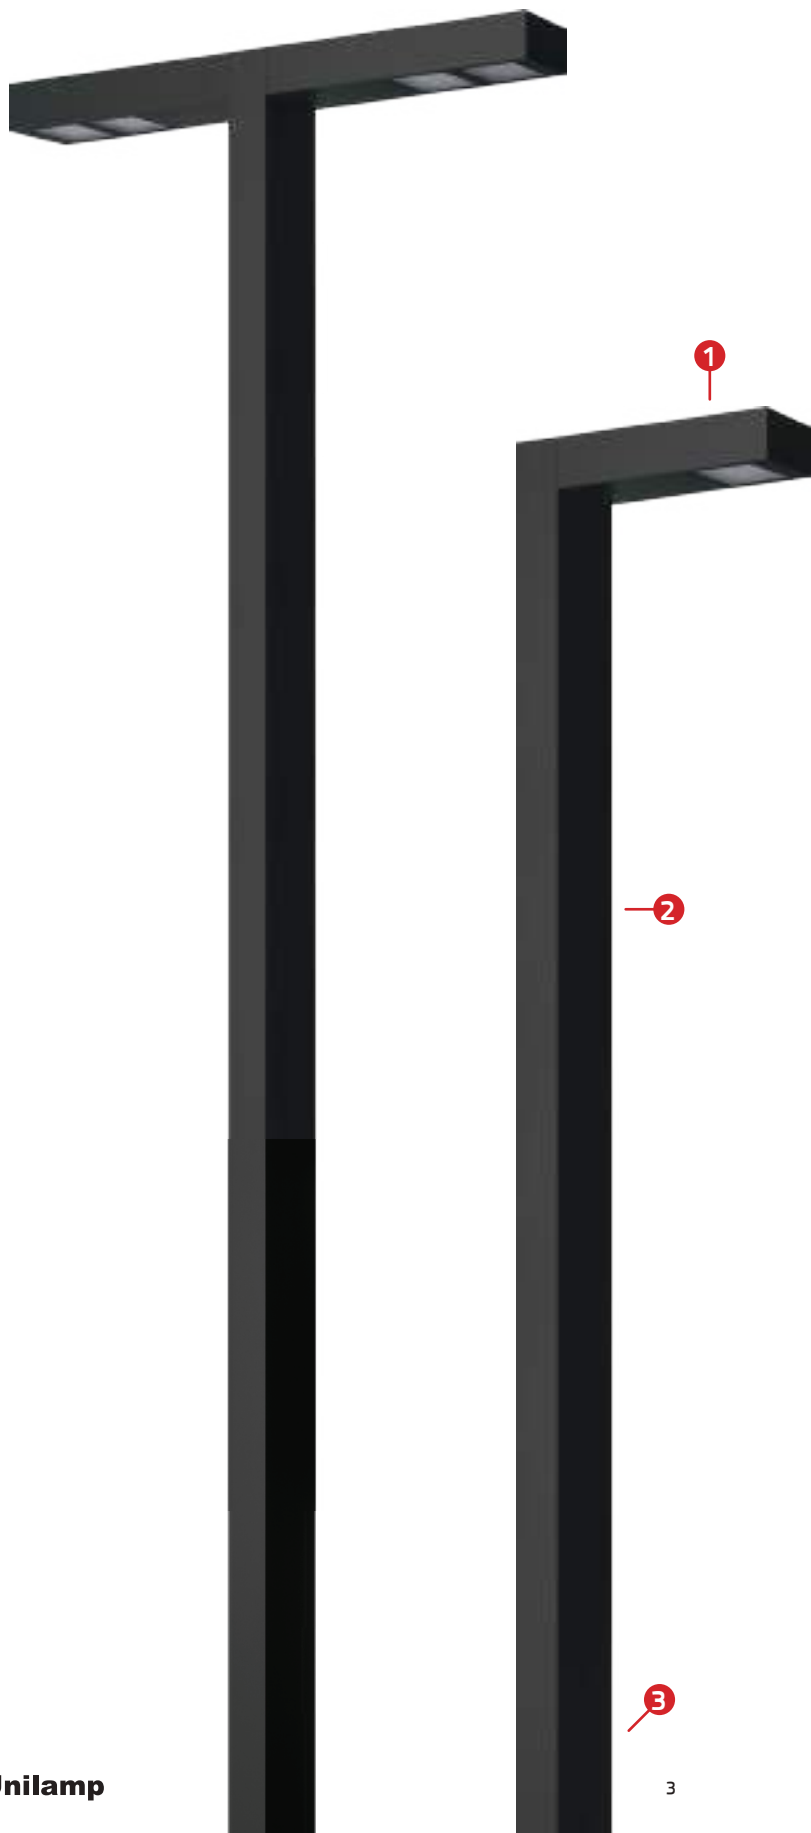

1 • KORNER





OD-7780



OD-7781

2 • Pole



- Extruded Aluminium Pole
with Flange Base / Internal Anchorage Unit
Diameter: 150x82mm.

- Hot-Dipped Galvanized Steel Pole
with Flange Base / Internal Anchorage Unit
Diameter: 151x102mm.

3 • Anchor Bolt Kit




for Aluminium Pole



for Galvanized
Steel Pole

• Planted Root



- for Aluminium Pole
- for Galvanized Steel Pole

• MODULAR SOLUTIONS

POLE CLAMP



1 • KORNER



OD-7780



OD-7781

2 • Aluminium Pole Clamp



Diameter: 60 / 76 mm.
for Single Side



Diameter: 60 / 76 mm.
for Double Side

3 • Pole



Diameter: 60 / 76 mm.

WALL MOUNT LUMINAIRE



1 • KORNER



OD-7780



OD-7781

2 • Wall Adapter



• MODULAR SOLUTIONS



Accessory		KORNER – Pole Top Light		KORNER – Pole Clamp	KORNER – Wall Mouth
	IP68 Water Tight Connecting Device Cable Diameter 7 – 12mm.	•	•	•	•
	IP68 Water Tight Connecting Device, 3 Pole, Cable Diameter 7.0 – 11.5mm.	•	•	•	•
	IP68 Water Tight Connecting Device 5 Pole, Cable Diameter 8 – 12.5mm. [1–10V or DALI]	•	•	•	•
	IP68 Water Tight Connecting Device, 3 Pole, Cable Diameter 5.0 – 9.5mm	•	•	•	•
	IP68 Water Tight Connecting Device 5 Pole, Cable Diameter 7.1 – 13mm. [1–10V or Dalí]	•	•	•	•
	IP68 Water Tight Connecting Device with Distribution block, 3 pole, 1 input, 2 outputs, Cable Diameter 5.0 – 9.5mm.	•	•	•	–
	IP68 Water Tight Connecting Device with Distribution block, 5 pole, 1 input, 2 outputs, Cable Diameter 7.1 – 13mm. [1–10V or Dalí]	•	•	•	–
	Anchor Bolt Kit for Aluminium Pole.	•	–	–	–
	Anchor Bolt Kit for Galvanized Steel Pole. [for Diameter 102mm. and 151x102mm.]	•	–	–	–
	Planted Root	–	•	–	–
	Aluminium Pole Clamp Diameter 60/76 mm.	–	–	•	–
	Wall Adapter	–	–	–	•
	Hot-Dipped Galvanized Steel Pole 151x102mm. Height 6000/7000/8000 mm. with Flange Base / with Internal Anchorage Unit	•	•	–	–
	Extruded Aluminium Pole 150x82mm. Height 4500mm. with Flange Base / with Internal Anchorage Unit	•	•	–	–
	Aluminium Pole Diameter 60/76 mm.	–	–	•	–




KORNER

KORNER
WALL MOUNT LUMINAIRE



KORNER
WALL MOUNT LUMINAIRE



KORNER

NEW!

POLE LIGHT & POLE TOP LIGHT WALL MOUNT LUMINAIRE

KORNER 1 / 7780	
KORNER 2 / 7781	
Luminaire Performance	
	2240 - 8340 lm
	27 - 70 W
	79 - 124 lm/W
Beam Options	
T1	T2 T3 T4 T5
Color Temperature	
3000K / 4000K	
Controller	
On-off / DIM 1-10V / DALI / Casambi	

Accessories			
	Aluminium pole		Steel pole
	Anchor bolt		IP68 Connector
	IP68 Connector		IP68 Connector
	Distribution box		

KORNER

Product Code	Product Name	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Controller
 OD-7780	KORNER 1	27 W	T1	3000 K 4000 K	2840 lm 2980 lm	On-Off/ DIM 1-10V/ DALI / CASAMBI
			T2	3000 K 4000 K	2610 – 2890 lm 2740 – 3040 lm	
			T3	3000 K 4000 K	2730 – 3090 lm 2870 – 3250 lm	
			T4	3000 K 4000 K	2470 lm 2590 lm	
			T5	3000 K 4000 K	2240 – 3190 lm 2350 – 3350 lm	
		38 W	T1	3000 K 4000 K	3870 lm 4090 lm	On-Off/ DIM 1-10V/ DALI / CASAMBI
			T2	3000 K 4000 K	3560 – 3940 lm 3760 – 4160 lm	
			T3	3000 K 4000 K	3720 – 4210 lm 3930 – 4450 lm	
			T4	3000 K 4000 K	3370 lm 3550 lm	
			T5	3000 K 4000 K	3050 – 4350 lm 3220 – 4590 lm	
 OD-7781	KORNER 2	50 W	T1	3000 K 4000 K	5130 lm 5390 lm	On-Off/ DIM 1-10V/ DALI / CASAMBI
			T2	3000 K 4000 K	4820 – 5320 lm 5070 – 5590 lm	
			T3	3000 K 4000 K	4600 – 5010 lm 4830 – 5270 lm	
			T4	3000 K 4000 K	4510 lm 4740 lm	
			T5	3000 K 4000 K	4090 – 5790 lm 4300 – 6090 lm	
		70 W	T1	3000 K 4000 K	7000 lm 7390 lm	On-Off/ DIM 1-10V/ DALI / CASAMBI
			T2	3000 K 4000 K	6570 – 7260 lm 6940 – 7660 lm	
			T3	3000 K 4000 K	6270 – 6830 lm 6620 – 7210 lm	
			T4	3000 K 4000 K	6150 lm 6490 lm	
			T5	3000 K 4000 K	5580 – 7900 lm 5890 – 8340 lm	

KORNER

✦ **Ideal** Application



Unilamp Co., Ltd.

461 Ramintra Road, Kannayao, Bangkok 10230 Thailand

Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1

Fax : +66[0]2 943 2419

unilamp@unilamp.co.th | online@unilamp.co.th



www.unilamp.co.th