

PROJECTOR



KUBIK is a robust cube-shaped spotlight/floodlight with LED light source. The family offers ground/wall mount fixing, pole clamp and wall clamp array, indirect pole light and wall light. The front glass cover is flush to the luminaire housing thus dust and water are not accumulated. High efficiency lenses and reflectors are used in this luminaire family. Aiming can be done through graduated scale by tool.

The luminaire housing separates LED and driver compartment to achieve lower operating temperature and longer service time. **KUBIK** is suitable to light up object from short to medium distance like bushes, plants, sculptures, flags, signboards, columns, building facets, etc.



www.unilamp.co.th/en/p/kubik

Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module.
- Available with integrated driver or remote driver.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.

Available Color



***Custom colors are available on request.*




• MODULAR SOLUTIONS

Micro KUBIK + Aluminum Earth Spike



Micro KUBIK + Aluminum Earth Spike


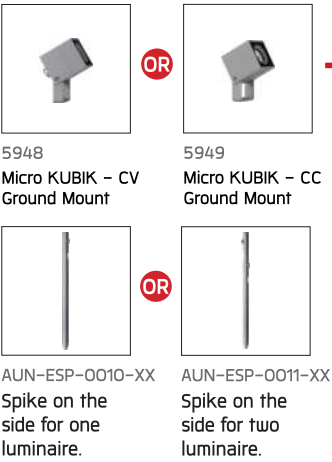


OR





• MODULAR SOLUTIONS

KUBIK + Wall Array

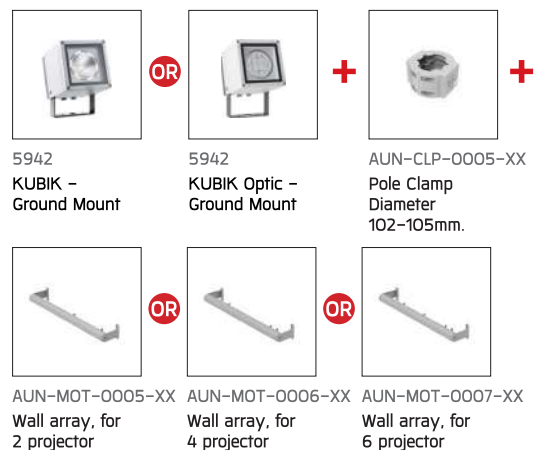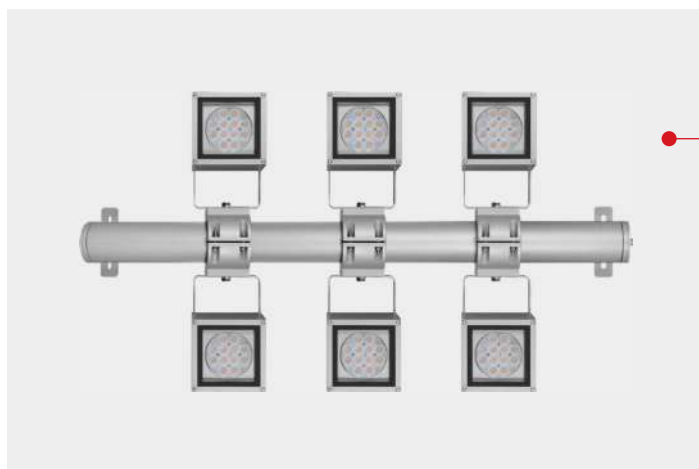


KUBIK + Pole Array + Pole

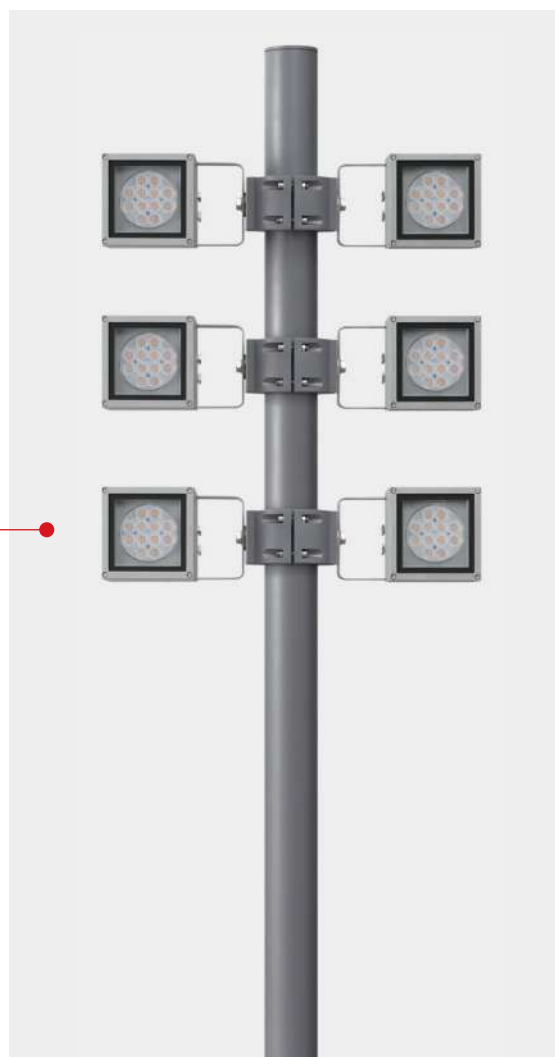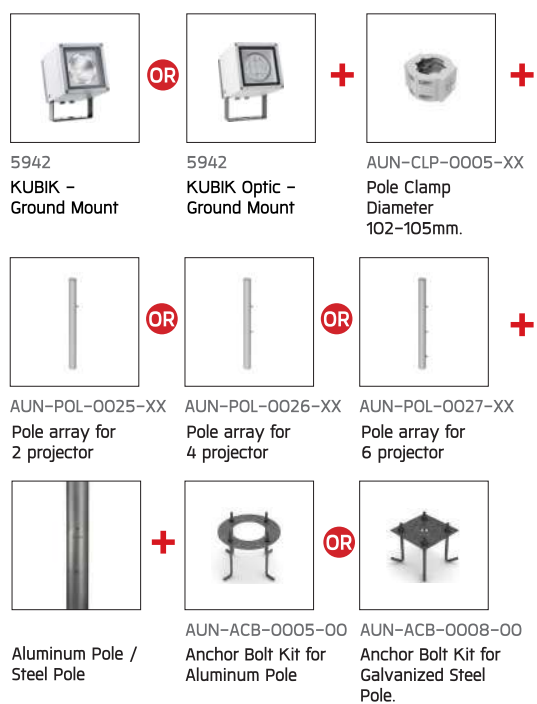

KUBIK



Micro KUBIK
CC/CV

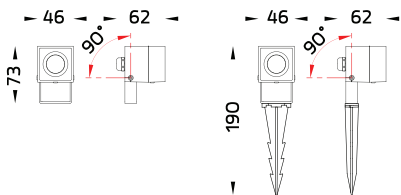

KUBIK

Application Type : Projector
Subgroup : Rectangular

Micro KUBIK – CV/ 5948
Micro KUBIK – CC/ 5949

Luminaire Performance

220 – 310 lm
3.3 – 3.9 W
64 – 84 lm/W

Beam Options



Color Temperature

2700K/ 3000K

Controller


Remote

Input Voltage


12VDC/24VDC
1200mA, 3.17Vdc, Uin max 50Vdc

Accessories


	Tree Strap		Glare shield cap
	Earth Spike		CC Driver
	CV Driver		



Mini KUBIK
CC/CVDA



Mini Slim KUBIK
CVDA



KUBIK


Application Type : Projector
Subgroup : Rectangular

Mini Slim KUBIK/ 5940
Mini Slim KUBIK – CVDA/ 5940
Mini KUBIK/ 5941
Mini KUBIK – CVDA/ 5941

Luminaire Performance

220 – 1740 lm
8 – 14 W
22 – 124 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K


Controller

On-off/ On-off/ DALI/ DALI/ Remote

Input Voltage

24VDC
220–240Vac 50/60Hz
1050mA, 11.9Vdc, Uin max 150Vdc
1050mA, 12.5Vdc, Uin max 150Vdc


Accessories

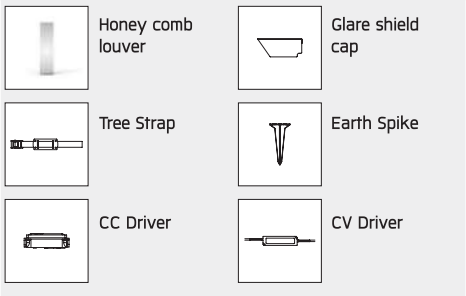

KUBIK



KUBIK
CC/CC [DMX]



KUBIK

Application Type : Projector
Subgroup : Rectangular

KUBIK/ 5942

KUBIK - CC/ 5942

KUBIK - CC [DMX]/ 5942


Luminaire Performance

1420 - 4520 lm

24 - 43 W

59 - 113 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K/ RGBW

Controller

On-off/ 1-10V/ DALI/ Remote

Input Voltage

220-240VAC 50/60HZ

24Vdc, 4CHx5Vdc-6.5Vdc, Uin max 150Vdc

700mA, 4CHx5Vdc-6.5Vdc, Uin max 150Vdc

Accessories

	Honey comb louver		Softening lens
	Glare shield ring		Pole clamp
	Wall array		Pole array
	Glare shield cap		Barn door
	Aluminum pole		Steel pole
	IP68 Connector		CC Driver
	CV Driver		IP67 Water Tight
	IP68 Water Tight		Splitter DMX
	Cable		XLR 3 pin
	DMX Controller		

* please see more accessories details at the back of catalogue or visit our website.

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code
										REMOTE	
00-5940   CVDA	8 W	12°	2700 K	600 lm	75 lm/W	•					5940-A-3-524-XX
			3000 K	600 lm	75 lm/W	•					5940-A-3-867-XX
			4000 K	640 lm	80 lm/W	•					5940-A-3-868-XX
	8 W	25°	2700 K	460 lm	57 lm/W	•					5940-B-3-524-XX
			3000 K	460 lm	57 lm/W	•					5940-B-3-867-XX
			4000 K	490 lm	61 lm/W	•					5940-B-3-868-XX
	8 W	46°	2700 K	480 lm	60 lm/W	•					5940-C-3-524-XX
			3000 K	480 lm	60 lm/W	•					5940-C-3-867-XX
			4000 K	510 lm	63 lm/W	•					5940-C-3-868-XX
	8 W	43°/14°	2700 K	480 lm	60 lm/W	•					5940-H-3-524-XX
			3000 K	480 lm	60 lm/W	•					5940-H-3-867-XX
			4000 K	510 lm	63 lm/W	•					5940-H-3-868-XX
	8 W	14°/43°	2700 K	480 lm	60 lm/W	•					5940-N-3-524-XX
			3000 K	480 lm	60 lm/W	•					5940-N-3-867-XX
			4000 K	510 lm	63 lm/W	•					5940-N-3-868-XX
	8.1 W	12°	2700 K	800 lm	98 lm/W		•				5940-A-7-580-XX
			3000 K	800 lm	98 lm/W		•				5940-A-7-581-XX
			4000 K	850 lm	104 lm/W		•				5940-A-7-582-XX
	8.1 W	25°	2700 K	620 lm	76 lm/W		•				5940-B-7-580-XX
			3000 K	620 lm	76 lm/W		•				5940-B-7-581-XX
			4000 K	660 lm	81 lm/W		•				5940-B-7-582-XX
	8.1 W	46°	2700 K	640 lm	79 lm/W		•				5940-C-7-580-XX
			3000 K	640 lm	79 lm/W		•				5940-C-7-581-XX
			4000 K	680 lm	83 lm/W		•				5940-C-7-582-XX
	8.1 W	43°/14°	2700 K	640 lm	79 lm/W		•				5940-H-7-580-XX
			3000 K	640 lm	79 lm/W		•				5940-H-7-581-XX
			4000 K	680 lm	83 lm/W		•				5940-H-7-582-XX
	8.1 W	14°/43°	2700 K	640 lm	79 lm/W		•				5940-N-7-580-XX
			3000 K	640 lm	79 lm/W		•				5940-N-7-581-XX
			4000 K	680 lm	83 lm/W		•				5940-N-7-582-XX
	10 W	12°	2700 K	800 lm	80 lm/W	•					5940-A-3-523-XX
			3000 K	800 lm	80 lm/W	•					5940-A-3-897-XX
			4000 K	850 lm	85 lm/W	•					5940-A-3-898-XX
	10 W	25°	2700 K	800 lm	80 lm/W				•		5940-A-5-523-XX
			3000 K	800 lm	80 lm/W				•		5940-A-5-897-XX
			4000 K	850 lm	85 lm/W				•		5940-A-5-898-XX
	10 W	46°	2700 K	620 lm	62 lm/W	•					5940-B-3-523-XX
			3000 K	620 lm	62 lm/W	•					5940-B-3-897-XX
			4000 K	660 lm	66 lm/W	•					5940-B-3-898-XX
	10 W	43°/14°	2700 K	620 lm	62 lm/W				•		5940-B-5-523-XX
			3000 K	620 lm	62 lm/W				•		5940-B-5-897-XX
			4000 K	660 lm	66 lm/W				•		5940-B-5-898-XX
	10 W	14°/43°	2700 K	640 lm	64 lm/W	•					5940-C-3-523-XX
			3000 K	640 lm	64 lm/W	•					5940-C-3-897-XX
			4000 K	680 lm	68 lm/W	•					5940-C-3-898-XX
	10 W	15°	2700 K	640 lm	64 lm/W				•		5940-C-5-523-XX
			3000 K	640 lm	64 lm/W				•		5940-C-5-897-XX
			4000 K	680 lm	68 lm/W				•		5940-C-5-898-XX
	10 W	46°	2700 K	640 lm	64 lm/W	•					5940-H-3-523-XX
			3000 K	640 lm	64 lm/W	•					5940-H-3-897-XX
			4000 K	680 lm	68 lm/W	•					5940-H-3-898-XX
	10 W	43°/14°	2700 K	640 lm	64 lm/W				•		5940-H-5-523-XX
			3000 K	640 lm	64 lm/W				•		5940-H-5-897-XX
			4000 K	680 lm	68 lm/W				•		5940-H-5-898-XX
	10 W	14°/43°	2700 K	640 lm	64 lm/W	•					5940-N-3-523-XX
			3000 K	640 lm	64 lm/W	•					5940-N-3-897-XX
			4000 K	680 lm	68 lm/W	•					5940-N-3-898-XX
	10 W	15°	2700 K	640 lm	64 lm/W				•		5940-N-5-523-XX
			3000 K	640 lm	64 lm/W				•		5940-N-5-897-XX
			4000 K	680 lm	68 lm/W				•		5940-N-5-898-XX
	14 W	25°	2700 K	1220 lm	87 lm/W	•					5940-A-3-567-XX
			3000 K	1220 lm	87 lm/W	•					5940-A-3-569-XX
			4000 K	1300 lm	92 lm/W	•					5940-A-3-571-XX
	14 W	46°	2700 K	1220 lm	87 lm/W				•		5940-A-5-567-XX
			3000 K	1220 lm	87 lm/W				•		5940-A-5-569-XX
			4000 K	1300 lm	92 lm/W				•		5940-A-5-571-XX
	14 W	25°	2700 K	1160 lm	82 lm/W	•					5940-B-3-567-XX
			3000 K	1160 lm	82 lm/W	•					5940-B-3-569-XX
			4000 K	1240 lm	88 lm/W	•					5940-B-3-571-XX
	14 W	46°	2700 K	1160 lm	82 lm/W				•		5940-B-5-567-XX
			3000 K	1160 lm	82 lm/W				•		5940-B-5-569-XX
			4000 K	1240 lm	88 lm/W				•		5940-B-5-571-XX
	14 W	43°/14°	2700 K	1100 lm	78 lm/W	•					5940-C-3-567-XX
			3000 K	1100 lm	78 lm/W	•					5940-C-3-569-XX
			4000 K	1180 lm	84 lm/W	•					5940-C-3-571-XX
	14 W	46°	2700 K	1100 lm	78 lm/W				•		5940-C-5-567-XX
			3000 K	1100 lm	78 lm/W				•		5940-C-5-569-XX
			4000 K	1180 lm	84 lm/W				•		5940-C-5-571-XX
	14 W	43°/14°	2700 K	1130 lm	80 lm/W	•					5940-H-3-567-XX
			3000 K	1130 lm	80 lm/W	•					5940-H-3-569-XX
			4000 K	1210 lm	86 lm/W	•					5940-H-3-571-XX

*Please contact sales team for special request.

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code	
											REMOTE		
Mini Slim KUBIK	OD-5940		43°/14°	2700 K	1130 lm	80 lm/W				•		5940-H-5-567-XX	
	3000 K			1130 lm	80 lm/W				•		5940-H-5-569-XX		
	4000 K			1210 lm	86 lm/W				•		5940-H-5-571-XX		
	14 W		14°/43°	2700 K	1150 lm	82 lm/W	•					5940-N-3-567-XX	
				3000 K	1150 lm	82 lm/W	•					5940-N-3-569-XX	
				4000 K	1230 lm	87 lm/W	•					5940-N-3-571-XX	
				2700 K	1150 lm	82 lm/W				•		5940-N-5-567-XX	
				3000 K	1150 lm	82 lm/W				•		5940-N-5-569-XX	
	4000 K	1230 lm	87 lm/W				•		5940-N-5-571-XX				
	8.1 W	12°	2700 K	860 lm	106 lm/W		•				5941-A-7-586-XX		
			2700 K	780 lm	96 lm/W		•				5941-B-7-586-XX		
			3000 K	720 lm	88 lm/W		•				5941-C-7-587-XX		
	8.4 W	43°/16°	2700 K	220 lm	26 lm/W		•				5941-P-7-797-XX		
			3000 K	220 lm	26 lm/W		•				5941-P-7-798-XX		
			4000 K	230 lm	27 lm/W		•				5941-P-7-799-XX		
		16°/43°	2700 K	220 lm	26 lm/W		•				5941-Q-7-797-XX		
			3000 K	220 lm	26 lm/W		•				5941-Q-7-798-XX		
			4000 K	230 lm	27 lm/W		•				5941-Q-7-799-XX		
	9.8 W	12°	2700 K	860 lm	87 lm/W	•					5941-A-3-531-XX		
			3000 K	860 lm	87 lm/W	•					5941-A-3-532-XX		
		25°	2700 K	780 lm	79 lm/W	•					5941-B-3-531-XX		
			3000 K	780 lm	79 lm/W	•					5941-B-3-532-XX		
		46°	4000 K	830 lm	84 lm/W	•					5941-B-3-533-XX		
			2700 K	720 lm	73 lm/W	•					5941-C-3-531-XX		
		43°/16°	3000 K	720 lm	73 lm/W	•					5941-C-3-532-XX		
			2700 K	680 lm	69 lm/W	•					5941-H-3-531-XX		
			3000 K	680 lm	69 lm/W	•					5941-H-3-532-XX		
			3000 K	680 lm	69 lm/W	•					5941-H-3-532-XX		
	10 W	43°/16°	2700 K	220 lm	22 lm/W	•					5941-P-3-646-XX		
			3000 K	220 lm	22 lm/W	•					5941-P-3-647-XX		
			4000 K	230 lm	23 lm/W	•					5941-P-3-648-XX		
		16°/43°	2700 K	220 lm	22 lm/W	•					5941-Q-3-646-XX		
			3000 K	220 lm	22 lm/W	•					5941-Q-3-647-XX		
			4000 K	230 lm	23 lm/W	•					5941-Q-3-648-XX		
	13 W	12°	2700 K	1200 lm	92 lm/W					•	5941-A-2-528-XX		
			2700 K	1200 lm	92 lm/W		•				5941-A-7-583-XX		
			3000 K	1200 lm	92 lm/W		•				5941-A-7-584-XX		
	13 W	25°	3000 K	1080 lm	83 lm/W			•			5941-B-2-529-XX		
			3000 K	1080 lm	83 lm/W		•				5941-B-7-584-XX		
		46°	3000 K	1000 lm	76 lm/W					•	5941-C-2-529-XX		
4000 K			1080 lm	83 lm/W					•	5941-C-2-530-XX			
13 W	43°/16°	3000 K	1000 lm	76 lm/W		•				5941-C-7-584-XX			
		3000 K	940 lm	72 lm/W					•	5941-H-2-529-XX			
		3000 K	940 lm	72 lm/W					•	5941-N-2-529-XX			
	16°/43°	4000 K	1020 lm	78 lm/W					•	5941-N-2-530-XX			
		2700 K	940 lm	72 lm/W		•				5941-N-7-583-XX			
		2700 K	310 lm	23 lm/W					•	5941-P-2-630-XX			
13 W	43°/16°	3000 K	310 lm	23 lm/W					•	5941-P-2-644-XX			
		4000 K	330 lm	25 lm/W					•	5941-P-2-645-XX			
		2700 K	310 lm	23 lm/W		•				5941-P-7-759-XX			
	16°/43°	3000 K	310 lm	23 lm/W		•				5941-P-7-760-XX			
		4000 K	330 lm	25 lm/W		•				5941-P-7-796-XX			
		2700 K	310 lm	23 lm/W					•	5941-Q-2-630-XX			
13 W	16°/43°	3000 K	310 lm	23 lm/W					•	5941-Q-2-644-XX			
		4000 K	330 lm	25 lm/W					•	5941-Q-2-645-XX			
		2700 K	310 lm	23 lm/W		•				5941-Q-7-759-XX			
	20°	3000 K	310 lm	23 lm/W		•				5941-Q-7-760-XX			
		4000 K	330 lm	25 lm/W		•				5941-Q-7-796-XX			
		2700 K	310 lm	23 lm/W					•	5941-Q-7-796-XX			
14 W	20°	2700 K	1540 lm	110 lm/W	•					5941-B-3-503-XX			
		3000 K	1620 lm	115 lm/W	•					5941-B-3-901-XX			
		4000 K	1700 lm	121 lm/W	•					5941-B-3-904-XX			
	35°	2700 K	1580 lm	112 lm/W	•					5941-C-3-503-XX			
		3000 K	1660 lm	118 lm/W	•					5941-C-3-901-XX			
		4000 K	1740 lm	124 lm/W	•					5941-C-3-904-XX			
14 W	58°	2700 K	1470 lm	105 lm/W	•					5941-D-3-503-XX			
		3000 K	1550 lm	110 lm/W	•					5941-D-3-901-XX			
		4000 K	1620 lm	115 lm/W	•					5941-D-3-904-XX			
22 W	38°	4000 K	1720 lm	78 lm/W	•					5941-O-3-920-XX			
KUBIK	OD-5942		24 W	25°	RGBW	1420 lm	59 lm/W					•	5942-B-2-686-XX
	RGBW				1420 lm	59 lm/W					•	5942-B-E-686-XX	
	46°			RGBW	1440 lm	60 lm/W					•	5942-C-2-686-XX	
				RGBW	1440 lm	60 lm/W					•	5942-C-E-686-XX	
	46°/20°			RGBW	1510 lm	62 lm/W					•	5942-H-2-686-XX	
				RGBW	1510 lm	62 lm/W					•	5942-H-E-686-XX	
	20°/46°			RGBW	1510 lm	62 lm/W					•	5942-N-2-686-XX	
				RGBW	1510 lm	62 lm/W					•	5942-N-E-686-XX	
	40 W		12°	3000 K	4410 lm	110 lm/W	•					5942-5-3-902-XX	
				4000 K	4520 lm	113 lm/W	•					5942-5-3-905-XX	
				3000 K	4410 lm	110 lm/W			•			5942-5-4-902-XX	
				3000 K	4210 lm	105 lm/W	•			•		5942-6-3-902-XX	
			23°	3000 K	4210 lm	105 lm/W				•		5942-6-4-902-XX	
				3000 K	4210 lm	105 lm/W							
				3000 K	4210 lm	105 lm/W							
				3000 K	4210 lm	105 lm/W							

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code	
													
KUBIK	OD-5942		40 W	48°	3000 K	3740 lm	93 lm/W	•					5942-7-3-902-XX
	4000 K				3840 lm	96 lm/W	•				5942-7-3-905-XX		
	3000 K				3740 lm	93 lm/W		•			5942-7-4-902-XX		
	3000 K				3740 lm	93 lm/W			•		5942-7-5-902-XX		
		43 W	12°	3000 K	3860 lm	89 lm/W	•					5942-A-3-535-XX	
				2700 K	3860 lm	89 lm/W		•			5942-A-4-534-XX		
				3000 K	3860 lm	89 lm/W		•			5942-A-4-535-XX		
				2700 K	3860 lm	89 lm/W			•		5942-A-5-534-XX		
		43 W	46°	3000 K	3600 lm	83 lm/W	•					5942-B-3-535-XX	
				4000 K	3850 lm	89 lm/W	•				5942-B-3-536-XX		
				2700 K	3630 lm	84 lm/W	•				5942-C-3-534-XX		
				3000 K	3630 lm	84 lm/W	•				5942-C-3-535-XX		
		43 W	46°	4000 K	3890 lm	90 lm/W	•					5942-C-3-536-XX	
				2700 K	3630 lm	84 lm/W			•		5942-C-5-534-XX		
				4000 K	3890 lm	90 lm/W			•		5942-C-5-536-XX		
				3000 K	3070 lm	71 lm/W	•				5942-H-3-535-XX		
		43 W	46°/20°	3000 K	3070 lm	71 lm/W		•				5942-H-4-535-XX	
				3000 K	3070 lm	71 lm/W	•				5942-N-3-535-XX		
				3000 K	3070 lm	71 lm/W		•			5942-N-4-535-XX		
3000 K				3070 lm	71 lm/W		•			5942-N-4-535-XX			
Micro KUBIK	OD-5948		3.3 W	12°	2700 K	280 lm	84 lm/W				•	5948-A-2-561-XX	
	3000 K				280 lm	84 lm/W				•	5948-A-2-562-XX		
	25°			2700 K	230 lm	69 lm/W				•	5948-B-2-561-XX		
				3000 K	230 lm	69 lm/W				•	5948-B-2-562-XX		
		46°	2700 K	220 lm	66 lm/W				•	5948-C-2-561-XX			
			3000 K	220 lm	66 lm/W				•	5948-C-2-562-XX			
	OD-5949		3.9 W	12°	2700 K	310 lm	79 lm/W				•	5949-A-2-561-XX	
	3000 K				310 lm	79 lm/W				•	5949-A-2-562-XX		
	25°			3000 K	260 lm	66 lm/W				•	5949-B-2-562-XX		
				3000 K	250 lm	64 lm/W				•	5949-C-2-562-XX		



Courtyard by Marriott, Aravali resort, NCR, Delhi - INDIA