



SPECIFICATIONS

   IP 66 IK 10

PRODUCT NAME	NISMO
HOUSING	Die-cast aluminium body
BOWL	Optional: deep polycarbonate
FINISH	Polyester powder coating, any colour available
SOURCES	NISMO module (type ZEDLED 1) NISMO module (ORALED type):
COLOUR TEMPERATURE	ORALED: 2700 K, 3000 K, 4000 K ZEDLED 1: Amber*, 2200 K, 2400 K, 2700 K, 3000 K, 4000 K
OPTICAL	QUADRALENS / ORALENS
BACKLIGHT SHIELD	Medium or high as an option
FLUX & POWER**	Up to 9041lm; 75W
ELECTRICAL CLASS	Class I or II
WIRING	Pre-wired at the factory
MOUNTING	Post top

*Approx. 1800K
**At 3000K, in accordance with performance standards IEC 62717 and IEC 62722 (+/-5%tolerance)



- ▶ Smart-ready® (Zd4i)
- ▶ Dimming
- ▶ Detection
- ▶ Tunable white options
- ▶ WIZARD management system (pag. 420)


MECHANICAL INTERFACES



TOP



TOP 76

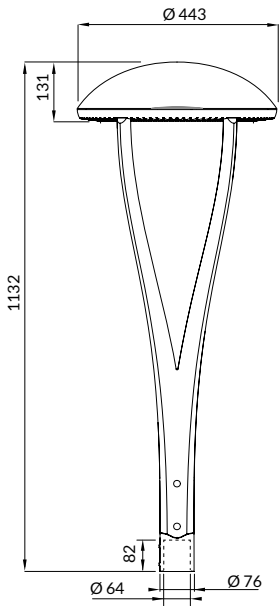



Configuration

Column strium **HELIX**
ø 76 mm
Column height: 4m



Configuration

Column **KIOWA**
Column height: 4m



Configuration

NISMO with bowl
Column ø 76 mm
Column height: 5m



Configuration

Bracket **INDIGO**
Outreach 500 mm

