ENZO 1




IEC EN 60598 | IP66 | RoHS

220–240 V 50 Hz

	IK	kg	SCx
ENZO 1	10	3.5 kg	0.06 m²


Mounting

Catenary

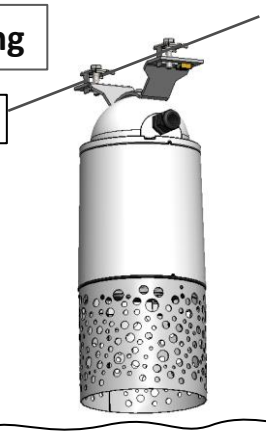

Decorative pattern option

Wall-mounted



Option: clear high-gloss methacrylate diffuser and candle-effect module


On post



Flat textured polycarbonate bowl option

Dimensions




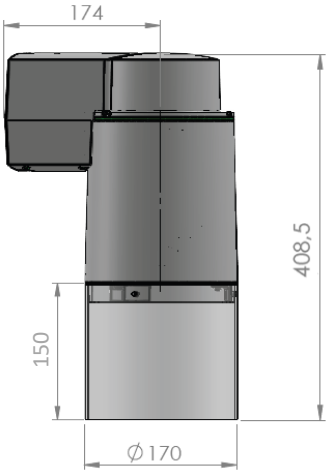


The light source contained in this luminaire must only be replaced by the manufacturer or its authorised service agent or a person with equivalent qualifications.


ECLATEC S.A.S. 41, rue Lafayette - PO Box 20069 - Maxéville - 54528 LAXOU CEDEX - France - Tel. • +33 (0)3 83 39 38 00 - Website • www.eclatec.com


Catenary

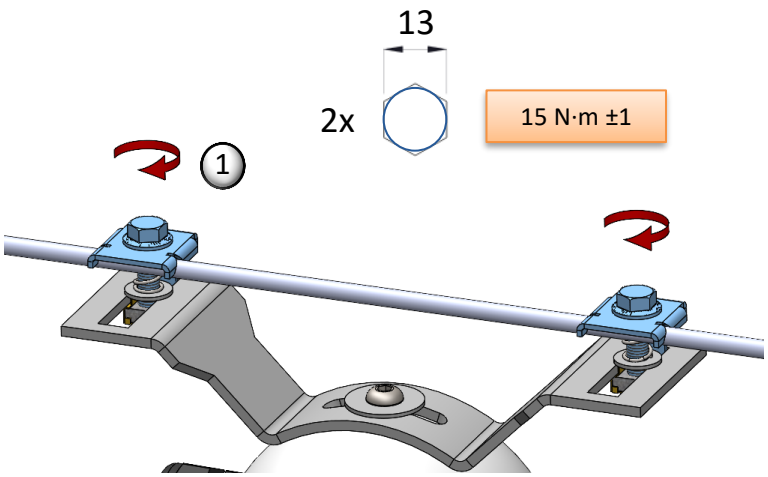

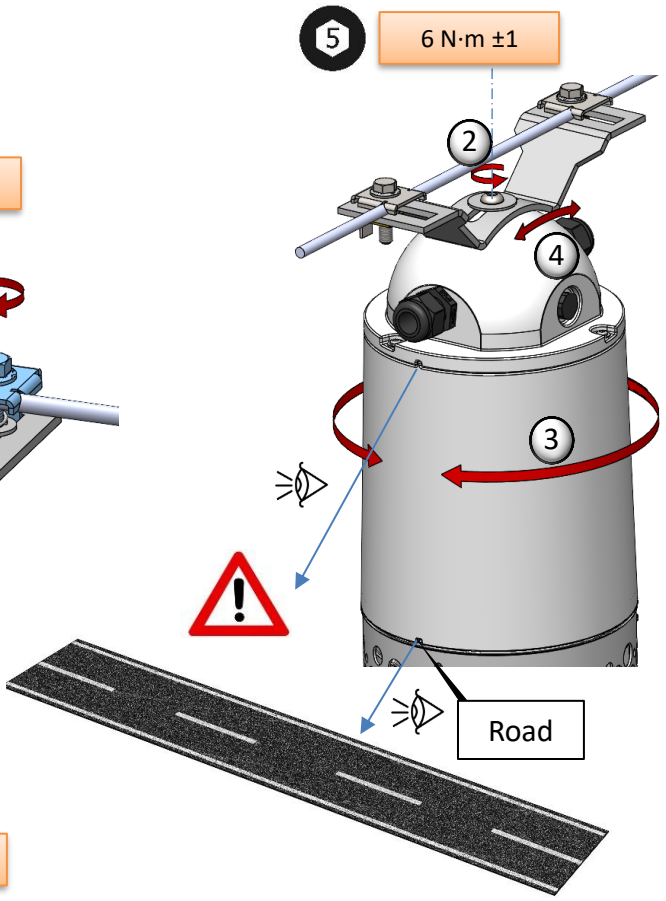



On wall

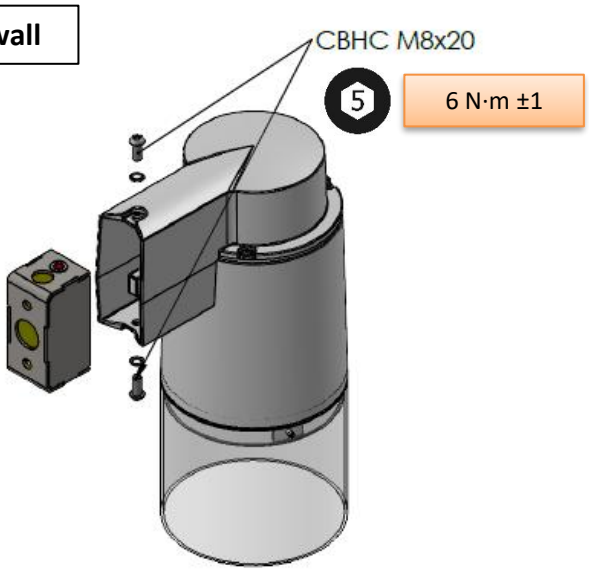




On pole ø ≥ 60 mm

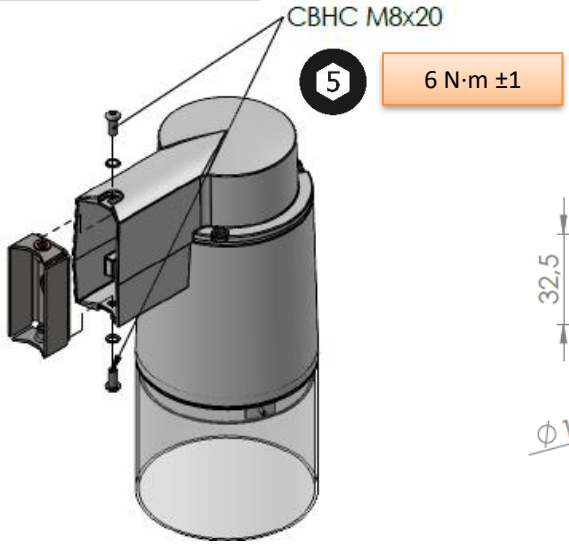




Cabling


Open

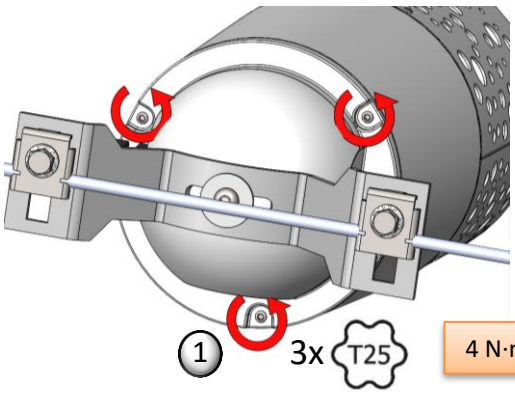


Cable entry

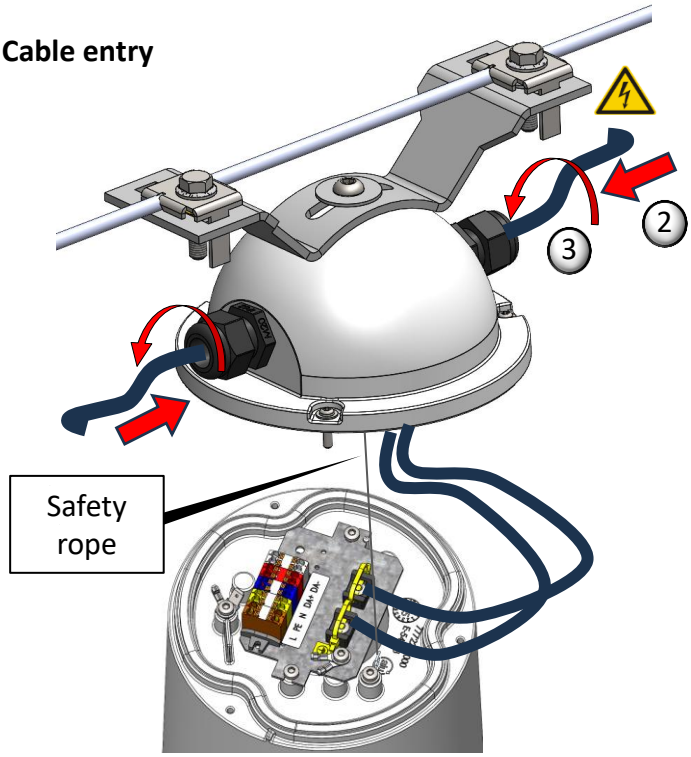


Open

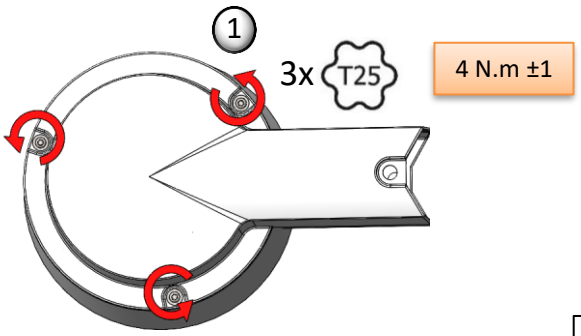



Cable passage

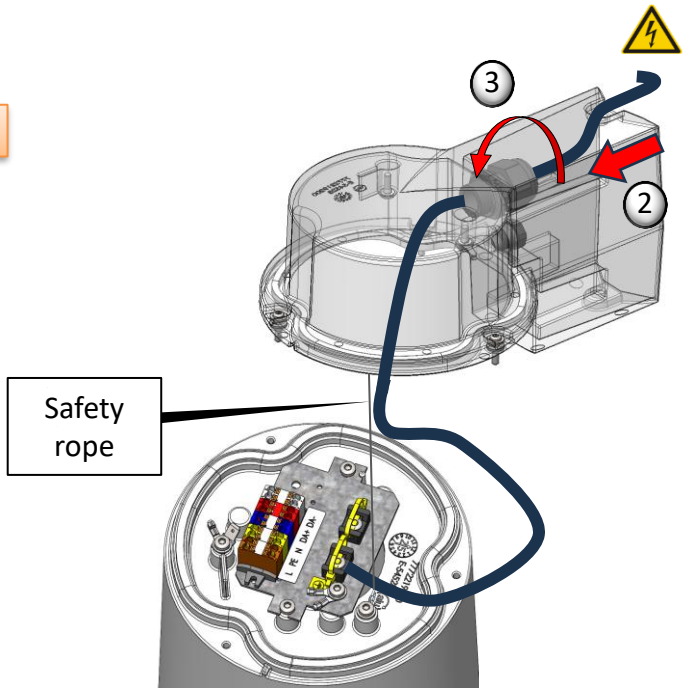



Electrical connection: Follow the instructions on the labels

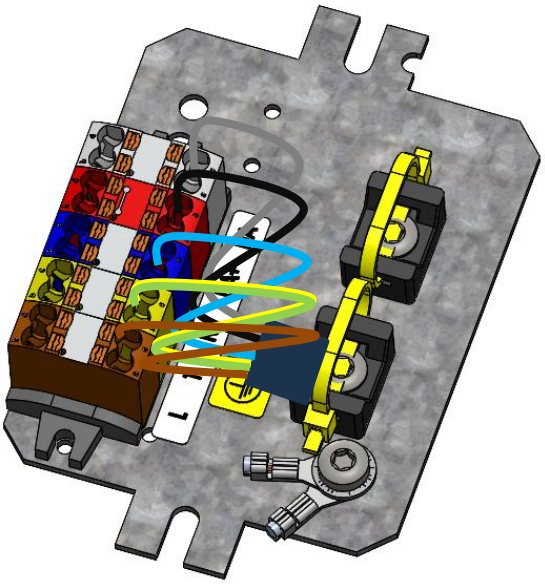

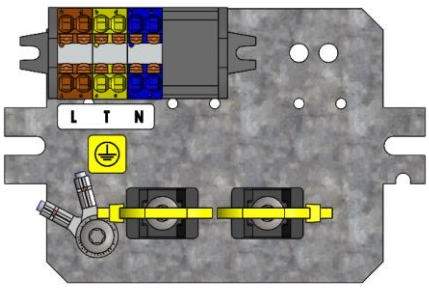

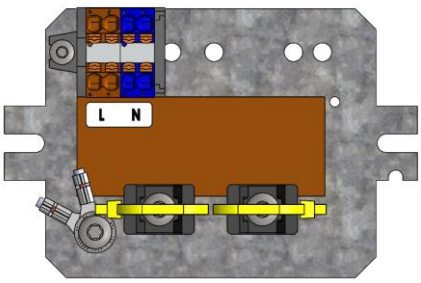

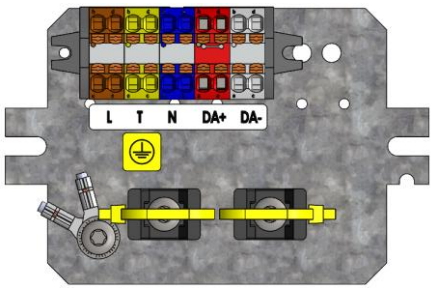

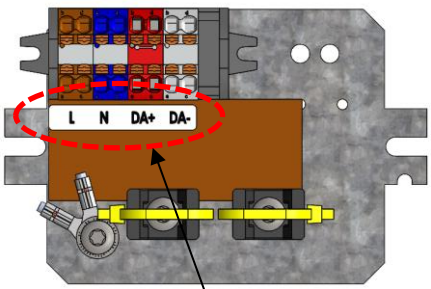

Electrical connection label

