ENZO 2



Decorative pattern option


IEC EN 60598 | IP66 | RoHS

220–240 V 50 Hz

	IK	kg	SCx
ENZO 2	10	5.7 kg	0.1 m²

Mountings

Catenary

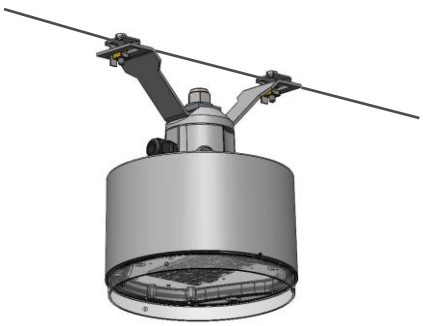


Flat textured polycarbonate bowl option

Suspended nipple G27



Clear high-gloss methacrylate bowl option

Dimensions

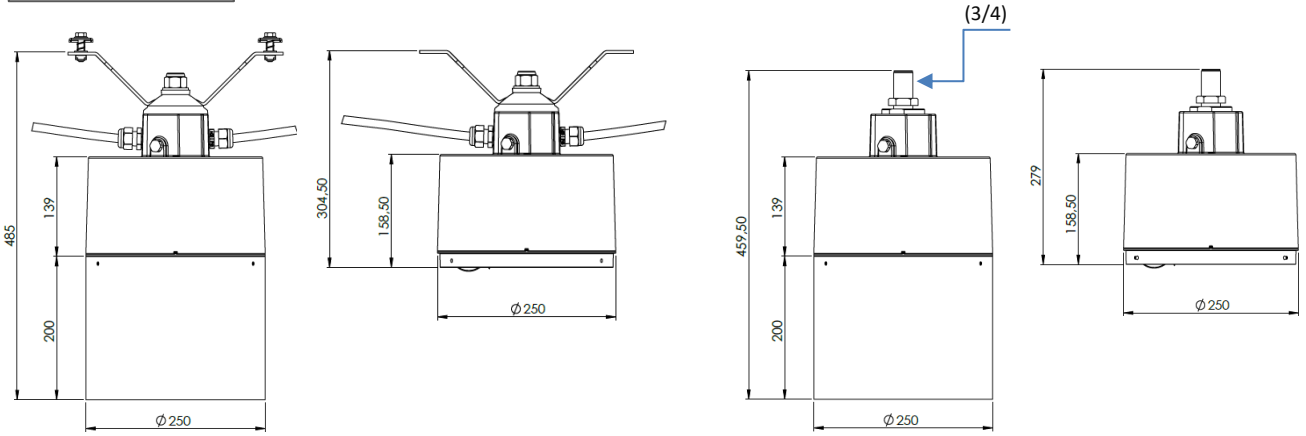


The light source contained in this luminaire must only be replaced by the manufacturer or its maintenance agent or a person with equivalent qualifications.

S671_5000_A

ECLATEC S.A.S. 41, rue Lafayette - PO Box 20069 - Maxéville - 54528 LAXOU CEDEX - France - Tel. • +33 (0)3 83 39 38 00 - Website • www.eclatec.com


Catenary

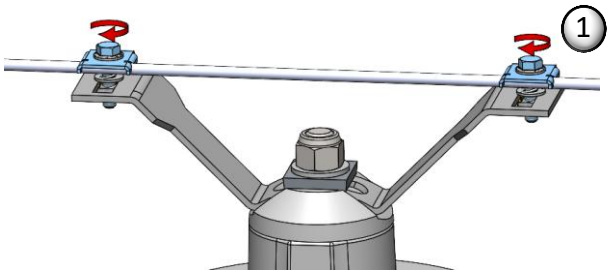

13

2x

15 N·m ±1

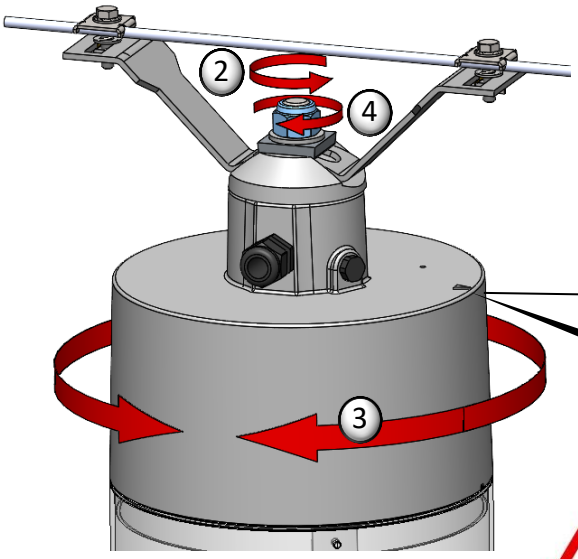


27


1x

25 N·m ±1


Road

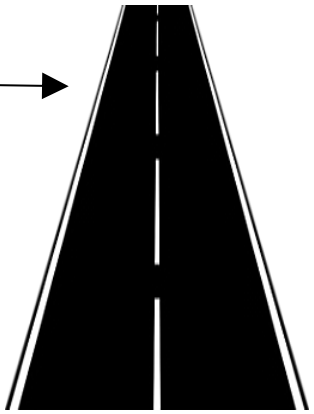





Suspended

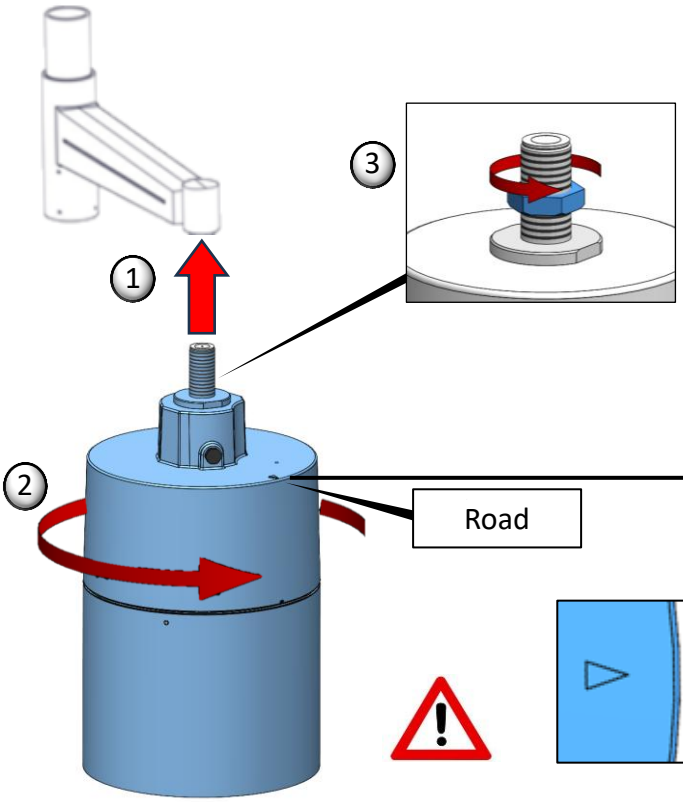


36

1x


100 N.m ±1


Road

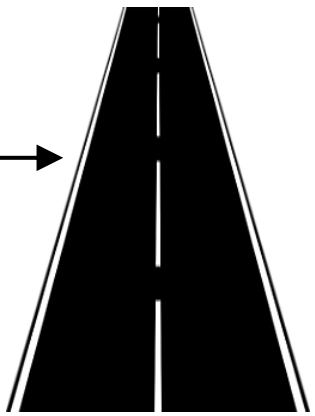


Wiring


Open

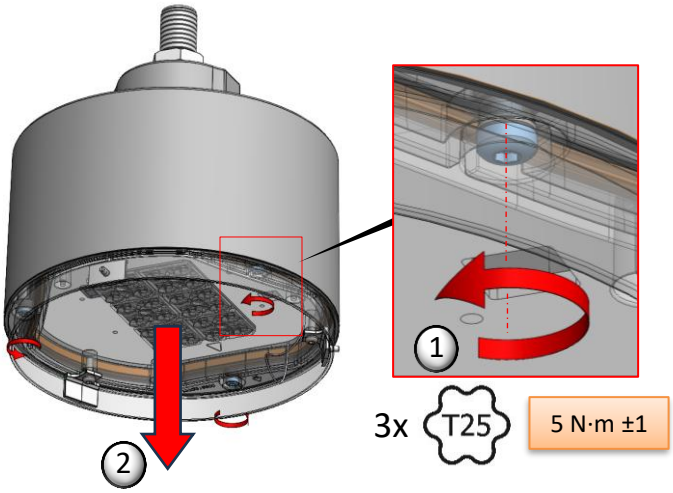

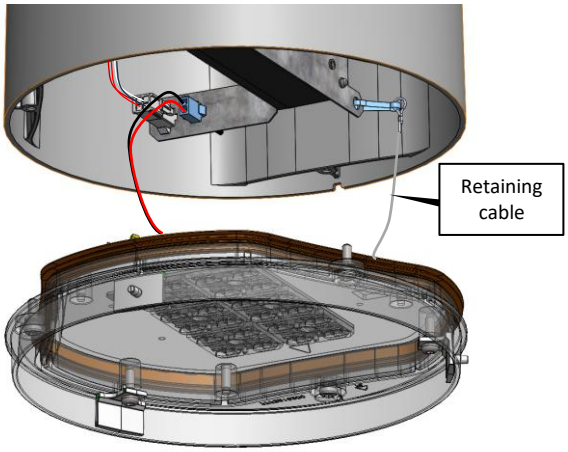


Unwire

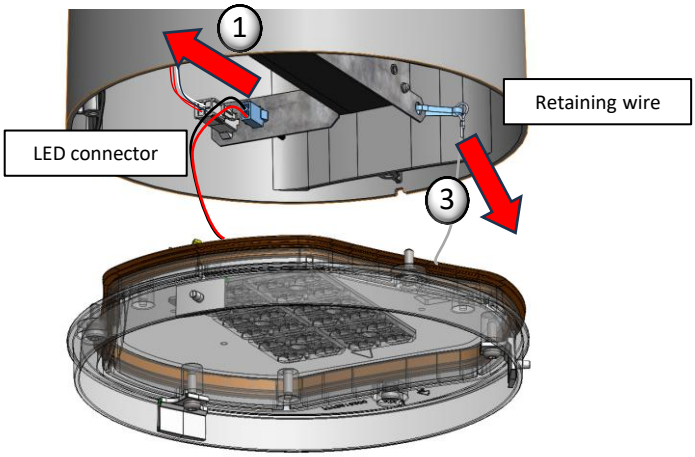


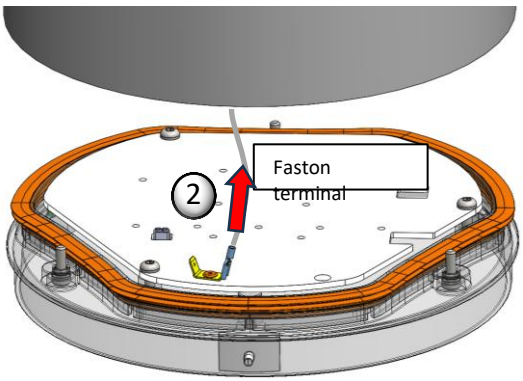


Remove the equipment

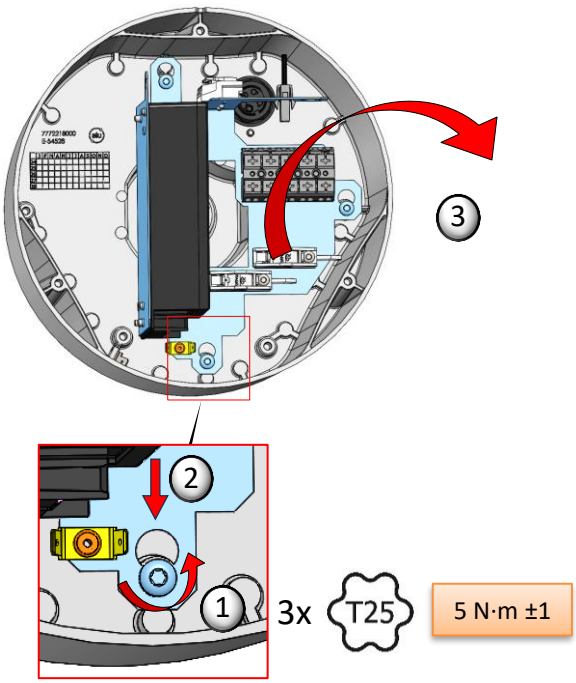


Cable routing for overhead catenary

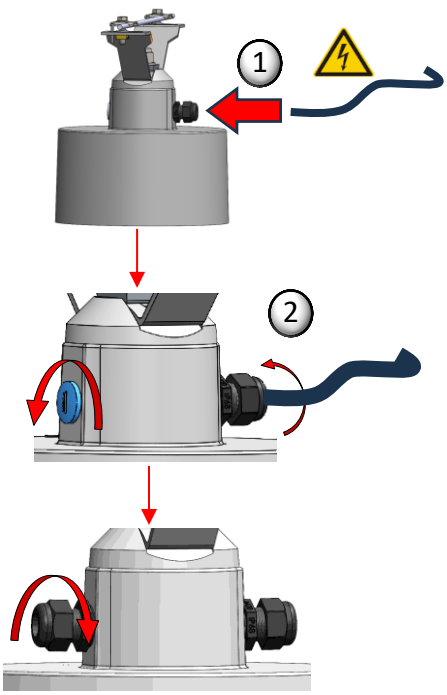



Electrical connection

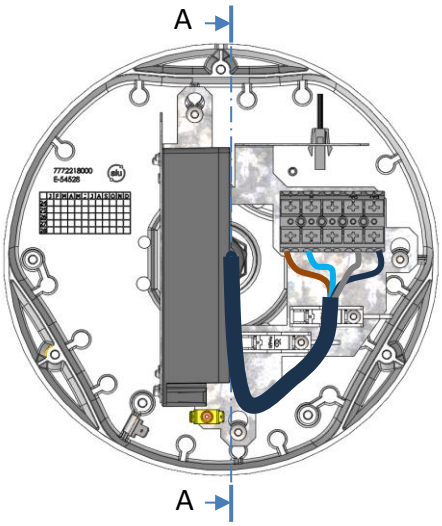


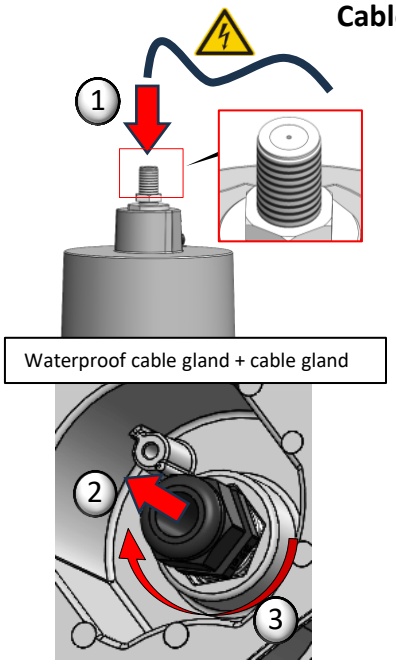



Cable entry for suspended model

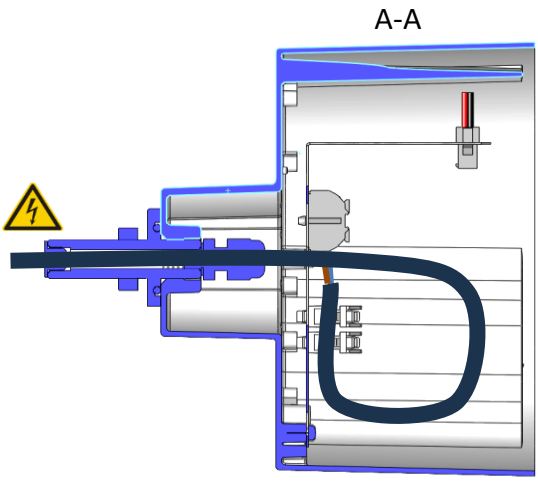





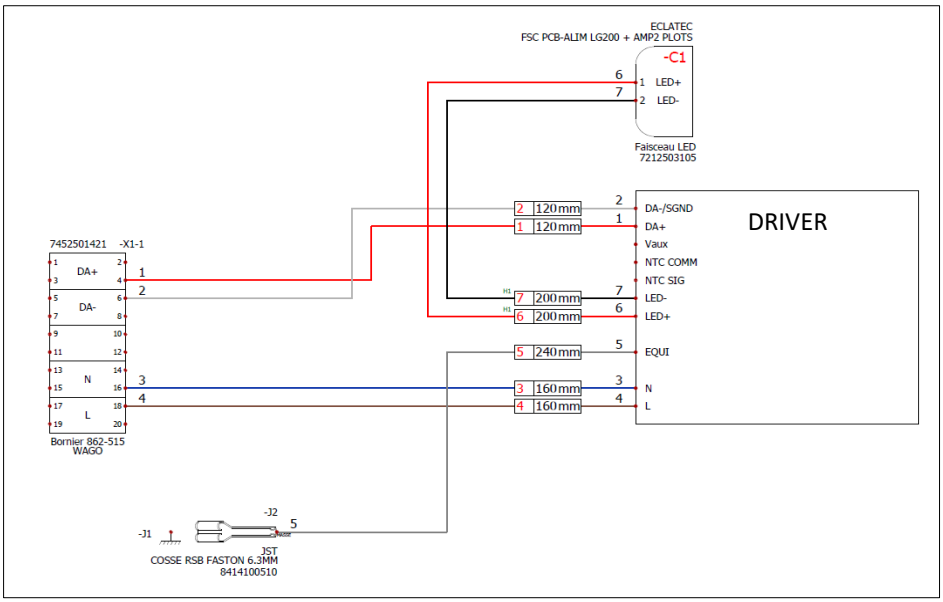



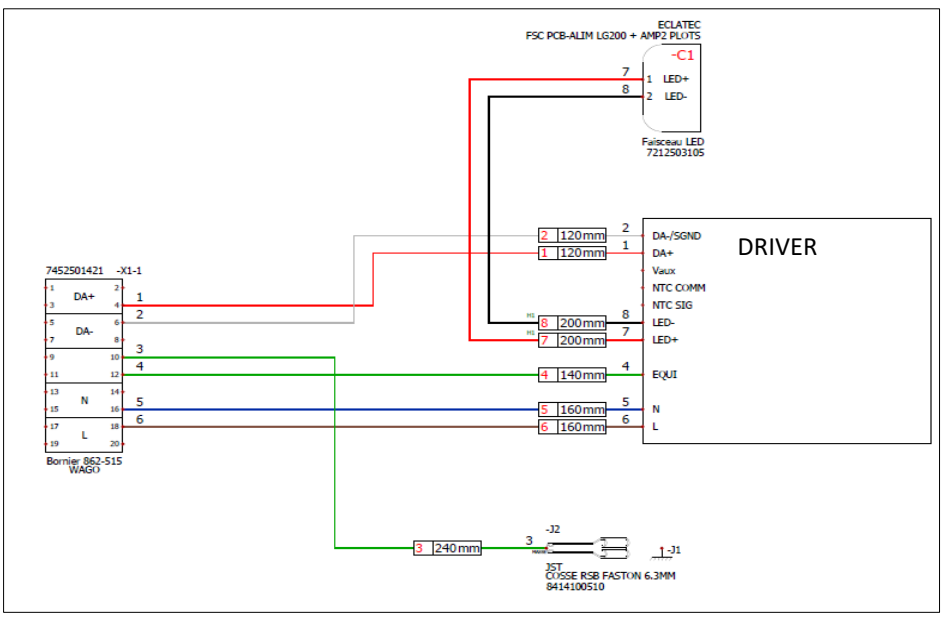


DMX
+
-
SHIELD
+
-
SHIELD
N
L
50
11

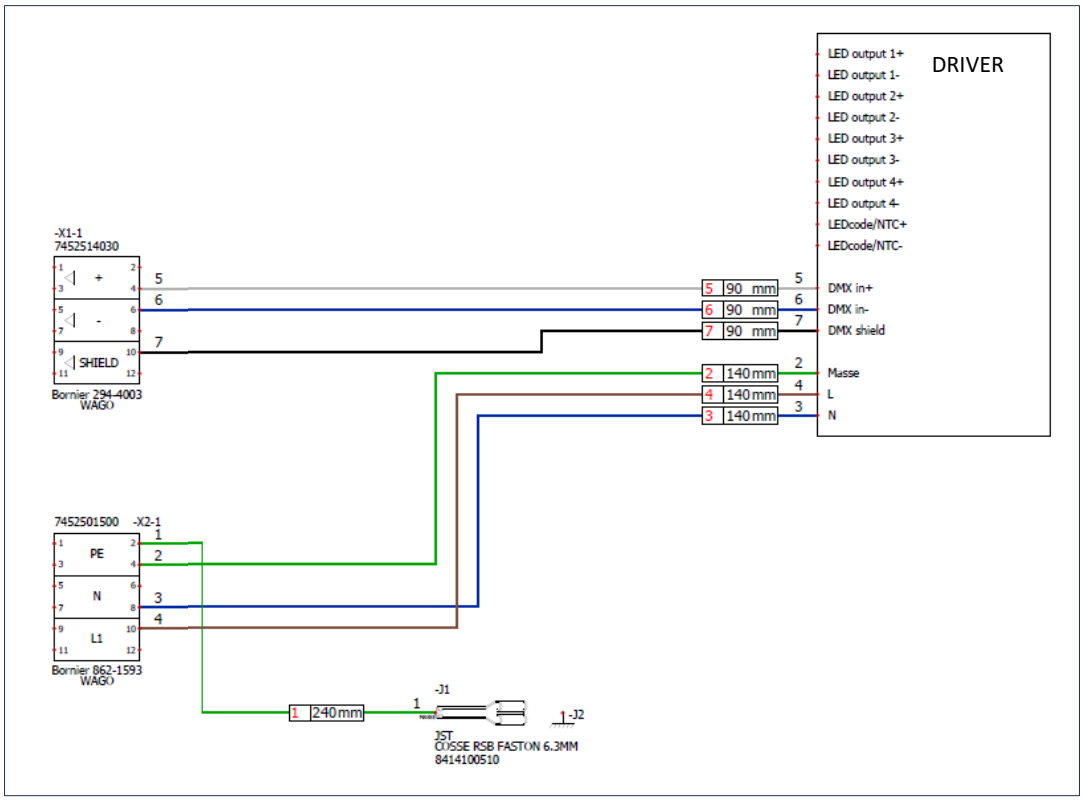
DRIVER
LED output 1+
LED output 1-
LED output 2+
LED output 2-
LED output 3+
LED output 3-
LED output 4+
LED output 4-
LEDcode/NTC+
LEDcode/NTC-
DMX in+
DMX in-
DMX shield
Masse
L
N
-X1-1
7452514030
Bornier 294-4003
WAGO
5
6
7
5 90 mm
6 90 mm
7 90 mm
2 140 mm
4 140 mm
3 140 mm
7452501500
-X2-1
PE
N
L1
Bornier 862-1593
WAGO
1
2
3
4
1 240 mm
-J1
JST
COSSE RSB FASTON 6.3MM
8414100510
-J2