
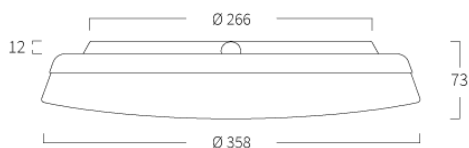


## Art.no. 57101-569

EAN 7316910866593



A decorative luminaire available in three sizes for ceiling or wall mounting in e.g. general areas, entrances and stairwells. The luminaire can be used with or without decor ring.

**Installation** For ceiling or wall mounting.

Ø520 mm – three securing holes.

Ø360/420 mm – two securing holes.

Installation in ceilings with decor ring - IP44

Without decor ring - IP41

Permanent wall mounting - IP40.

**Connection** Connects with 230 V; built-in LED driver. Snap-in terminal block 1.5 mm<sup>2</sup>, 1-phase through-wiring possible. Two cable entries on top of the luminaire and two cable entries on the side. Surface mounted mains cable possible 180°.

**Design** Luminaire body of sheet steel finished in matt white (RAL 9016). Opal matt acrylic diffuser.

Decor ring in white (RAL 9016), sand (RAL 1019) and azurite (RAL 5008).

**Louvre** Opal acrylic diffuser (PMMA).

**Reflector** The mounting plate acts as a reflector.

**Light distribution** Direct.

**Dimming** *e-Sense Detect* – Microwave sensors with lux threshold. Presence control on/off via relay or high/low, alternatively high/low/off via DALI.

*e-Sense Flex* – Integrated sensors with ambient light sensor. Presence/absense control high/low/off. Wireless communication via Bluetooth mesh. Suffix -569 equipped with microwave sensor.

**LED-information** Protection against transient main peaks up to 2kV (between L and N)

## Nove

Direct, e-Sense Flex, Without decor ring

### DESIGN

**Light distribution** Direct

**Louvre** Opal

**Colour** White

### LIGHT DATA & PERFORMANCE

**Lumen output** 1657

**lm/W** 104

**CCT, K** 4000

**CRI** 80

**SDCM** 3

**Lumen maintenance 50 000 h** L98

**Lumen maintenance 75 000 h** L97

**Lumen maintenance 100 000 h** L96

**Lumen maintenance L100 B50, h** 50000

**LED driver, h/max failure %** 50000/10

**Energy class, LED module** C

### CONTROLS & CONNECTIVITY

**Light control** e-Sense Flex

**Driver brand** Helvar

**DALI generation/address type** Dali-2/1xDT6

**Power on last level** Yes

**Switch control, max no.** 30

**AM** Yes

**ZD4i Certified** False

**Daylight functionality** False

### ELECTRICITY & ENCLOSURE

**Rated supply voltage, V** 220-240

**Mains frequency, Hz** 0, 50, 60

**Protective class** 1

**IP rating** 40

**System Wattage** 16

**Stand by W** 0.5

**Min. ambient temperature, °C** -20

**Max. ambient temperature, °C** 25

**MCB B10A, pcs** 27

**MCB B16A** 43

**MCB C10A** 46

**MCB C16A** 75

**THD, %** 10

**Surge protection CM, kV/kA** 2

**Surge protection DM, kV/kA** 1

**Power factor, 100 %** 0.91

### DIMENSIONS

**Height, mm** 73

**Diameter, mm** 360

**Weight, kg** 1.3