

STICK Direct

POLE LIGHT & POLE TOP LIGHT

NEW!

Light Column

NEW!

Pole Top Light



STICK



www.unilamp.co.th/en/p/stick

■ POLE LIGHT & POLE TOP LIGHT



STICK is cylindrical-shaped light column with symmetrical light distribution. The LED light source in combination with a unique 250 degree wide spread lens provides uniform light. It is available with the choices of three different color temperatures from 2700K, 3000K or 4000K in high color consistency and remarkable color rendering index.

STICK with HID light source and E27 holder for retrofit lamps are also available. The internal glare suppression louver improves the lighting quality by limiting the upward light emission.

STICK is generally installed in the walkways, gardens, parks, commercial areas and open spaces to provide the general lighting from mid-high level. The recommended mounting height is between 3 – 4 meters above the ground.

STICK Direct is an evolution of the existing STICK product line. The cylindrical shaped luminaire is available with symmetric or asymmetric light distribution. The efficacy of STICK has been improved to at least 120lm/W and virtually uplight free.

The ambient temperature is rated up to 50°C. STICK direct is available as light column or pole-top light. This makes STICK direct a great choice for new installations and site upgrades.

NEW!

STICK Direct Light Column



Specification

- Designed, Manufactured and tested according to IEC 60598.
- LM6 Die Cast Aluminium and Extruded Aluminium body.
- Stainless steel screws.
- Nano Ceramic surface conversion.
- Double layer coating.
- PC protective cover.
- Anodized aluminium louvers.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Installation must be carried out according to the enclosed product manual.

Available Color

Black	[replace the last 2 digits of ordering code with 01]
Graphite	[replace the last 2 digits of ordering code with 02]
Dark Grey	[replace the last 2 digits of ordering code with 03]
Aluminium Silver	[replace the last 2 digits of ordering code with 04]
White	[replace the last 2 digits of ordering code with 06]
Wooden Brown	[replace the last 2 digits of ordering code with 07]




NEW!


STICK Direct
Pole Top Light

STICK

STICK Direct
Light Column

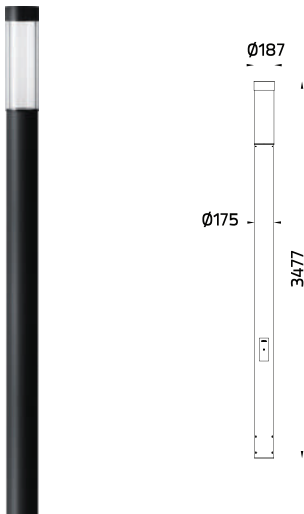

STICK Direct
Pole Top Light

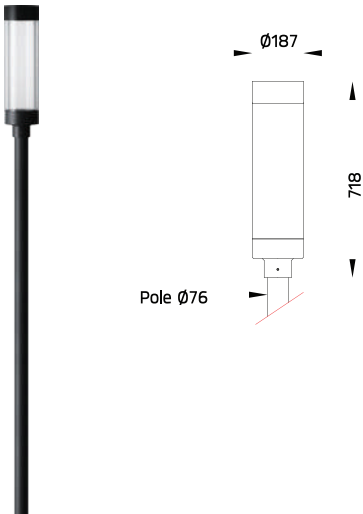

* Pole is not included and has to be ordered separately

STICK Direct

NEW!

POLE LIGHT & POLE TOP LIGHT

STICK Direct – Light Column/ 7268

STICK Direct – Pole Top Light/ 7269


Luminaire Performance

3090 – 4770 lm

26 – 36 W

117 – 133 lm/W

Beam Options



Color Temperature

3000K/ 4000K

Controller

On-off/ DIM 1-10V/ DALI/ Casambi

Accessories



Aluminium pole



Steel pole



Anchor bolt

STICK Direct

Product Code	Product Name	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Controller
 OD-7268	STICK Direct – Light Column	26 W	T1	3000 K 4000 K	3200 – 3210 lm 3360 – 3380 lm	On-Off/ DIM 1-10V/ DALI / CASAMBI
		36 W		3000 K 4000 K	4370 – 4390 lm 4610 – 4630 lm	On-Off/ DIM 1-10V/ DALI / CASAMBI
		26 W	T5	3000 K 4000 K	3090 – 3310 lm 3260 – 3480 lm	On-Off/ DIM 1-10V/ DALI / CASAMBI
		36 W		3000 K 4000 K	4230 – 4520 lm 4460 – 4770 lm	On-Off/ DIM 1-10V/ DALI / CASAMBI
 OD-7269	STICK Direct – Pole Top Light	26 W	T1	3000 K 4000 K	3200 – 3210 lm 3360 – 3380 lm	On-Off/ DIM 1-10V/ DALI / CASAMBI
		36 W		3000 K 4000 K	4370 – 4390 lm 4610 – 4630 lm	On-Off/ DIM 1-10V/ DALI / CASAMBI
		26 W	T5	3000 K 4000 K	3090 – 3310 lm 3260 – 3480 lm	On-Off/ DIM 1-10V/ DALI / CASAMBI
		36 W		3000 K 4000 K	4230 – 4520 lm 4460 – 4770 lm	On-Off/ DIM 1-10V/ DALI / CASAMBI

Application Reference

