



ALOHA

SPECIFICATIONS

RoHS ZD IP66 IK09

PRODUCT NAME	ALOHA
HOUSING	Die-cast aluminium body with openwork shape
FINISH	Polyester powder coating, any colour available
SOURCES	9 ALOHA modules fitted with a specific mono lens
COLOUR TEMPERATURE	3000K or 4000K, others on request
OPTICAL	MONOLENS
FLUX & POWER**	Up to 10 096lm; 75W
ELECTRICAL CLASS	Class I or II
MOUNTING	Post top, bracket

**At 3000K, in accordance with performance standards IEC 62717 and IEC 62722 (+/-5%tolerance)



- Smart-ready® (Zd4i)
- Dimming
- Detection
- WIZARD management system (pag. 420)

MECHANICAL INTERFACES



TOP







BITOP




PATIN




WALL BRACKET

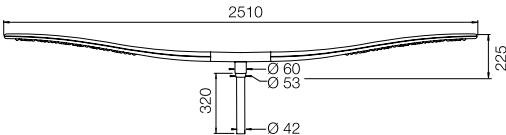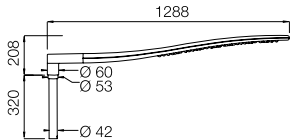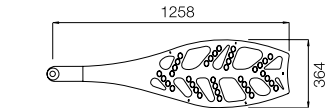

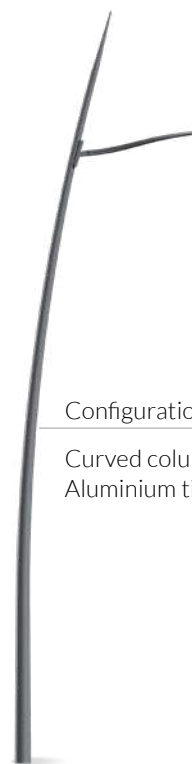


Configuration

Curved column: 7m
Aluminium tip

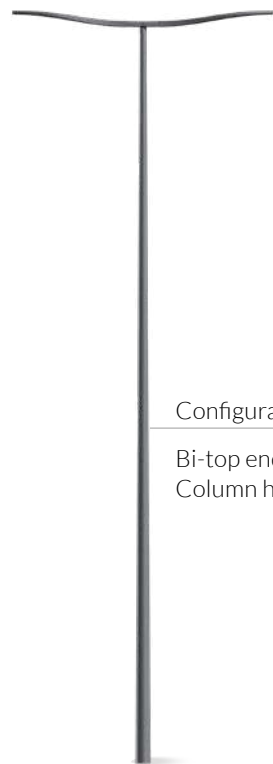


Configuration

Bi-top end piece
Column height: 7m

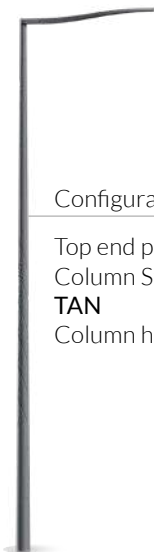

Configuration

Top end piece
Column Strium **CAPI-TAN**
Column height: 5m

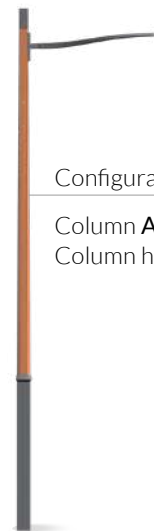

Configuration

Column **ALTAÏS**
Column height: 5m

