

Chalice 74

THORN

96631503 CHAL 74 LED550-830 WFL IP65 WHM

LED 7W LED_CHAL74_600_830	RoHS	T _a 0 +40	IP20 65	IK04	□	CE	△	⚡	⚙️	650°C	
---------------------------	------	-------------------------	------------	------	---	----	---	---	----	-------	--

Chalice 74

A ceiling recessed, fire-rated, LED downlight. Integral LED driver, suitable for use with leading edge dimmer switches. IP65 (IP20 from above), IK04, Class II electrical. Supplied with wide flood (48°) PMMA lens and matt die-cast aluminium bezel. Body: steel with aluminium heatsink. Spring clips make the product suitable for tool-free mounting in ceiling thicknesses of 1-25mm in a Ø74-80mm cutout. Tool-free wiring with a fully detachable connector and push-fit terminal block enabling loop-in/loop-out. Complete with 3000K LED. Fully fire rated for 30, 60 and 90 minute ceilings.


Adaptable light distribution by exchanging the WFL (48°) lens with either FL (31°) or WW (wallwash optic) - available as accessories.

Adaptable aesthetics by exchanging the WHM (matt white) bezel with either WH (gloss white), BKM (matt black), CR (chrome) or AL (brushed aluminium) - available as accessories.


Dimensions: Ø87 x 77 mm
Luminaire input power: 6.6 W
Luminaire luminous flux: 600 lm
Luminaire efficacy: 91 lm/W
Weight: 0.3 kg



TLG_CHLC_F_74PDB.jpg

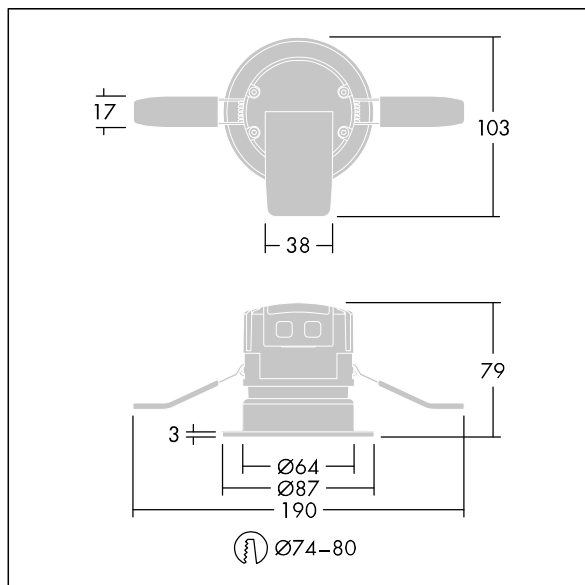

TLG_CH74_M_LDLO.wmf

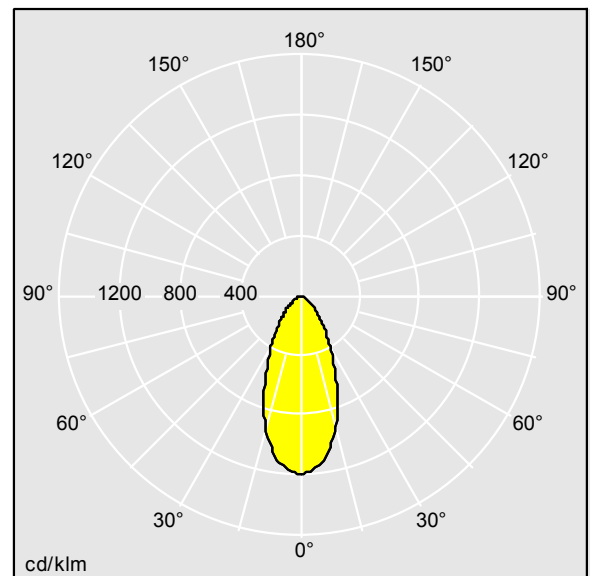

TLG_LE_1210.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 600 lm
Luminaire efficacy*: 91 lm/W
Colour Rendering Index min.: 80
LOR: 1,00 ULOR: 0,00 DLOR: 1,00

Chromaticity tolerance (initial MacAdam): 3
Rated median useful life*:
L70 50000h at 25°C
Ballast: 1x LED_DRV
Luminaire input power*: 6.6 W Power factor = 0.9
Maintenance category: C - Closed Top Reflector

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting