CORTO






IEC EN 60598 | IP66 | OR | RoHS


220–240 V 50 Hz

IK	kg	SCx	Hmax
10	5.9 kg	0.04 m²	10 m


CATELUX version

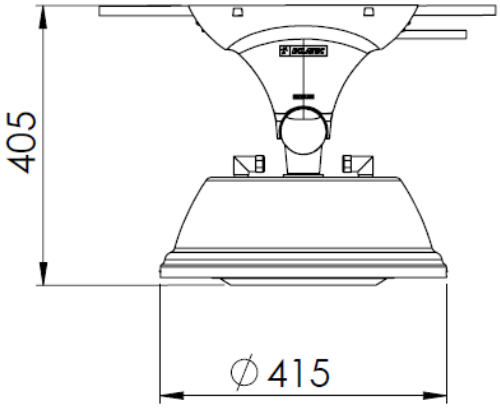


Without decorative light cut-off

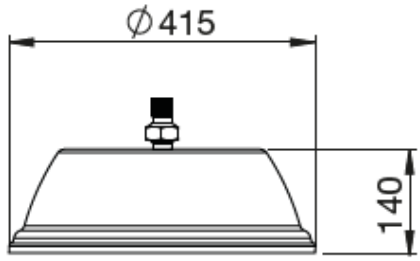

OSCILLATING CONNECTOR version

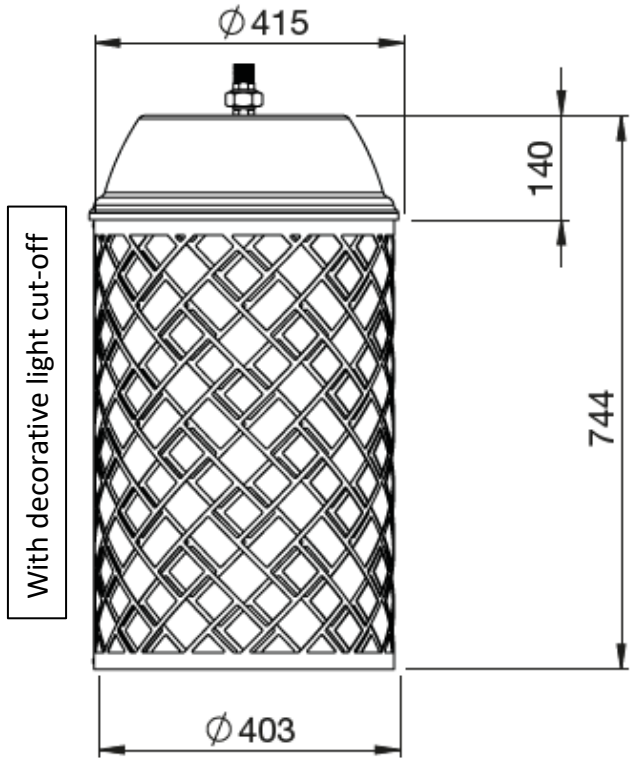



SCO version

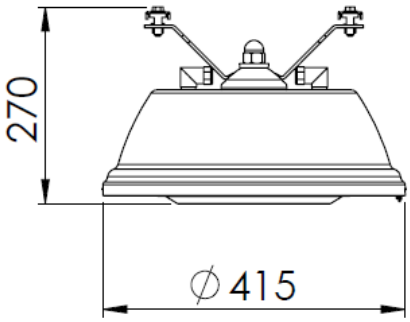

The light source contained within this luminaire must only be replaced by the manufacturer, its maintenance agent or a person with equivalent qualifications.


S621_5000_C ECLATEC S.A.S. 41, rue Lafayette - CS 20069 - Maxéville - 54528 LAXOU CEDEX - France - Tel. • + 33 (0)3 83 39 38 00 - Website • www.eclatec.com

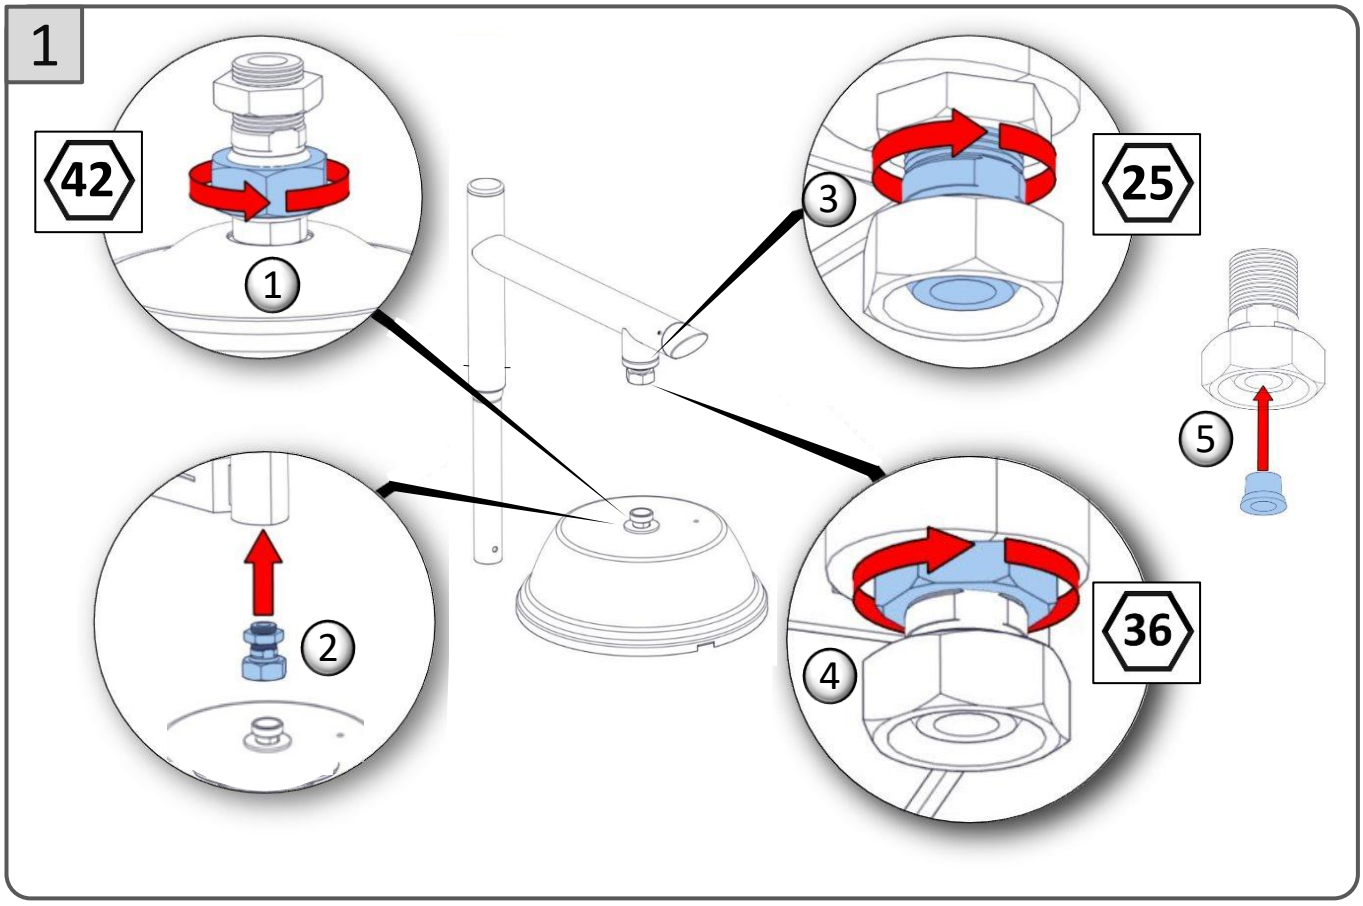

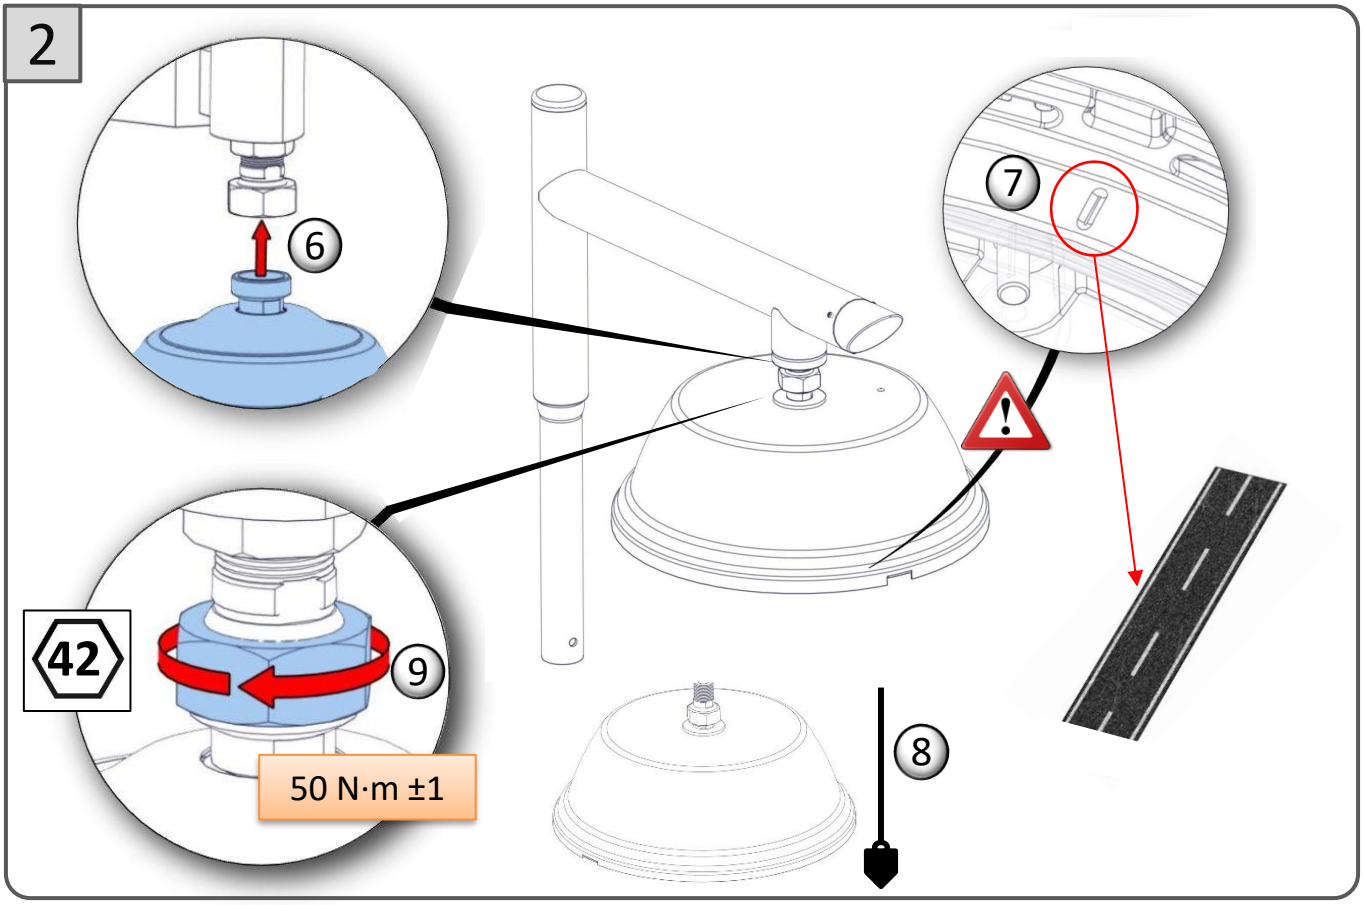


The light source contained in this luminaire must only be replaced by the manufacturer or its maintenance agent, or by a person with equivalent qualifications.

3

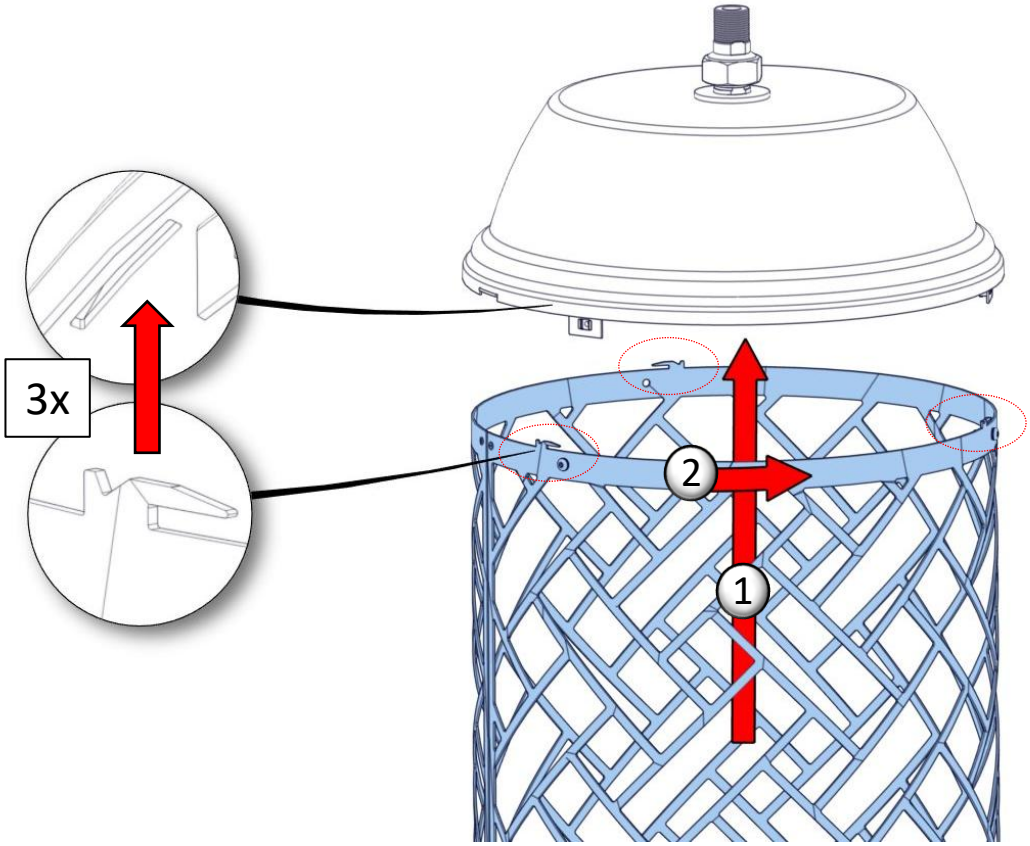


4

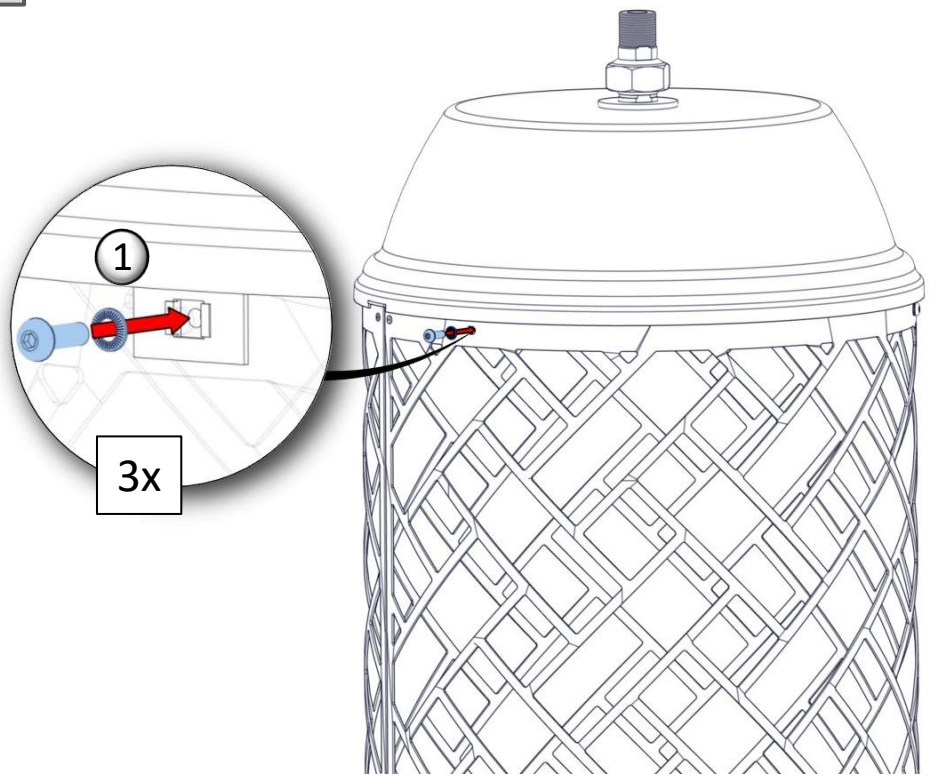

3

The light source contained in this luminaire must only be replaced by the manufacturer or its maintenance agent, or by a person with equivalent qualifications.

5

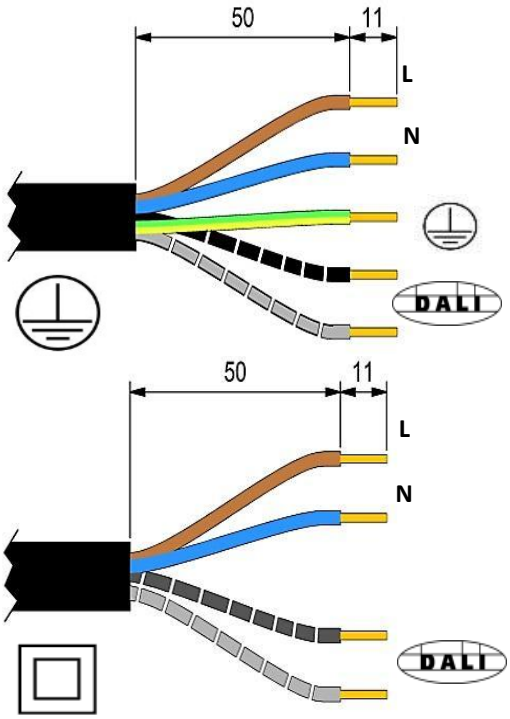

DALI wires at the base of the pole must be separated and insulated if they are not connected

The light source contained in this luminaire must only be replaced by the manufacturer, its maintenance agent or a person with equivalent qualifications.