

NEW Release KORNER

■ POLE MOUNTED

KORNER is a refined, minimalistic pole luminaire and wall light that combines modern design with practical functionality. Its sleek linear shape, clear lines, and closed surfaces contribute to a clean, understated aesthetic, while hidden mounting hardware ensures an unobtrusive installation. The luminaire undergoes a unique 16-stage paint process, providing superior weather resistance and long-lasting performance, while its virtually copper-free aluminum alloy guarantees exceptional durability.

KORNER is engineered for versatile use, supporting medium mounting heights with aluminum poles, and reaching up to 8 meters when combined with steel poles for high installations. Its innovative clamping system allows for seamless integration with existing circular poles, making it a flexible solution for retrofitting and new projects alike. **KORNER**'s high-efficacy LED modules, paired with CAD-optimized optics, ensure energy-efficient and precise illumination for a variety of outdoor settings.

Designed with advanced lighting control in mind, **KORNER** is compatible with modern light management systems, including D4i protocol and Zhaga Book 18 interface, for streamlined integration into smart lighting networks. Built to withstand challenging environments, it operates in ambient temperatures of up to 50°C, and equipped with the protector against electrical surges, making it an ideal choice for even the most demanding applications.



www.unilamp.co.th/en/p/korner

Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum and extruded. Aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Weather proof TPE grommet.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**



* Pole is not included and has to be ordered separately

• MODULAR SOLUTIONS



| Accessory | | KORNER – Pole Top Light | | KORNER – Pole Clamp | KORNER – Wall Mount |
|-----------|--|-------------------------|---|---------------------|---------------------|
| | IP68 Water Tight Connecting Device Cable Diameter 7 – 12mm. | • | • | • | • |
| | IP68 Water Tight Connecting Device, 3 Pole, Cable Diameter 7.0 – 11.5mm. | • | • | • | • |
| | IP68 Water Tight Connecting Device 5 Pole, Cable Diameter 8 – 12.5mm. [1–10V or DALI] | • | • | • | • |
| | IP68 Water Tight Connecting Device, 3 Pole, Cable Diameter 5.0 – 9.5mm | • | • | • | • |
| | IP68 Water Tight Connecting Device 5 Pole, Cable Diameter 7.1 – 13mm. [1–10V or Dalí] | • | • | • | • |
| | IP68 Water Tight Connecting Device with Distribution block, 3 pole, 1 input, 2 outputs, Cable Diameter 5.0 – 9.5mm. | • | • | • | – |
| | IP68 Water Tight Connecting Device with Distribution block, 5 pole, 1 input, 2 outputs, Cable Diameter 7.1 – 13mm. [1–10V or Dalí] | • | • | • | – |
| | Anchor Bolt Kit for Aluminum Pole. | • | – | – | – |
| | Anchor Bolt Kit for Galvanized Steel Pole. [for Diameter 102mm. and 151x102mm.] | • | – | – | – |
| | Planted Root | – | • | – | – |
| | Aluminum Pole Clamp Diameter 60/76 mm. | – | – | • | – |
| | Wall Adapter | – | – | – | • |
| | Hot-Dipped Galvanized Steel Pole 151x102mm. Height 6000/7000/8000 mm. with Flange Base / with Internal Anchorage Unit | • | • | – | – |
| | Extruded Aluminum Pole 150x82mm. Height 4500mm. with Flange Base / with Internal Anchorage Unit | • | • | – | – |
| | Aluminum Pole Diameter 60/76 mm. | – | – | • | – |




• MODULAR SOLUTIONS

▪ KORNER + Accessory kit for Pole Mount Solutions



**Please see Poles & Anchor bolt section for pole mounting options*


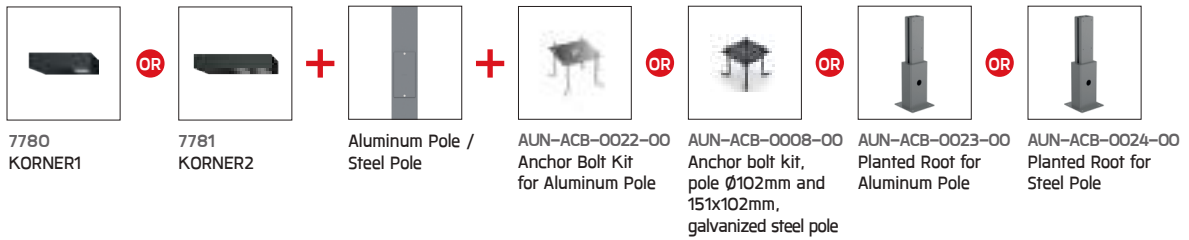


**Please see Poles & Anchor bolt section for pole mounting options*



• MODULAR SOLUTIONS



▪ KORNER + Accessory kit for Wall Mount Solutions

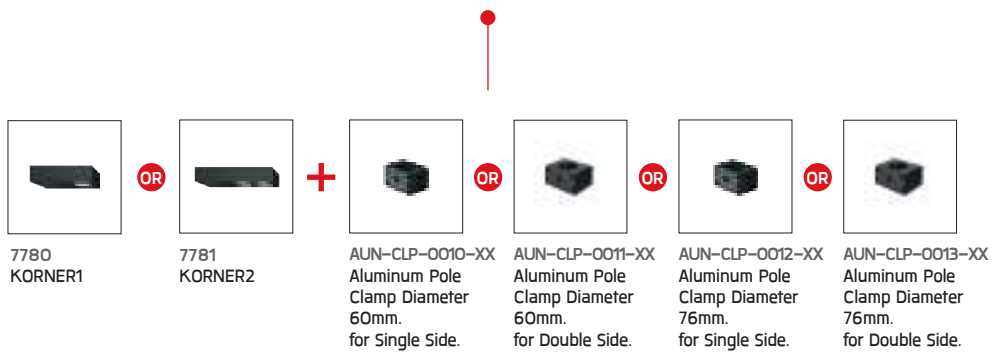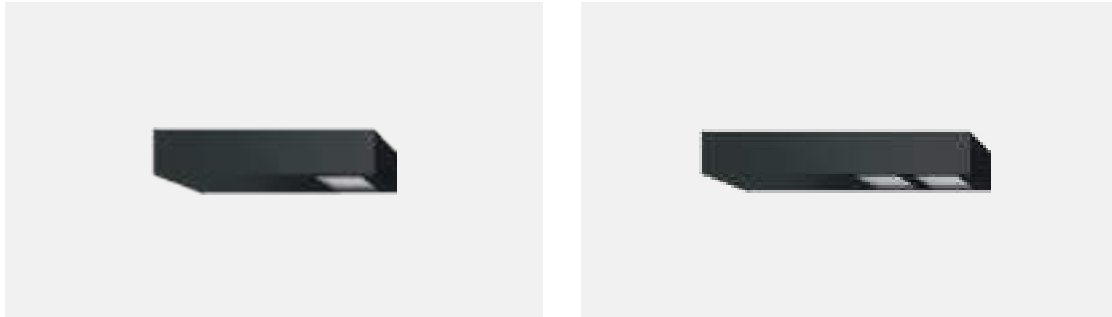


KORNER



KORNER1



KORNER2



KORNER

NEW!

Application Type : Pole mounted

Subgroup : Urban area/ Urban ambient

KORNER1 / 7780

KORNER2 / 7781


Luminaire Performance

2240 - 8340 lm

27 - 70 W

79 - 124 lm/W

Beam Options



Color Temperature

3000K/ 4000K


Controller

On-Off/ 1-10V/ DALI/ CASAMBI





Input Options

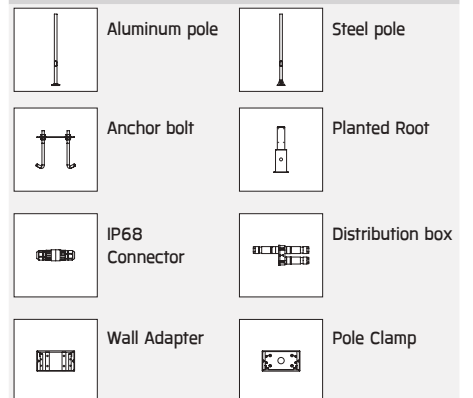220-240Vac 50/60Hz






Accessories








KORNER 1

| Product Code | Luminaire Wattage | Beam | CCT | Luminaire Lumen | Efficacy | Controller | | | | Ordering Code |
|--|-------------------|----------|----------|-----------------|----------|---|---|---|-----------------|-----------------|
| | | | | | |  |  |  | CASAMBI | |
| OD-7780  | 27 W | T1 | 3000 K | 2840 lm | 105 lm/W | • | | | | 7780-U-3-666-XX |
| | | | 4000 K | 2980 lm | 110 lm/W | • | | | | 7780-U-3-667-XX |
| | | | 3000 K | 2840 lm | 105 lm/W | | • | | | 7780-U-4-666-XX |
| | | | 4000 K | 2980 lm | 110 lm/W | | • | | | 7780-U-4-667-XX |
| | | | 3000 K | 2840 lm | 105 lm/W | | | • | | 7780-U-5-666-XX |
| | 4000 K | 2980 lm | 110 lm/W | | | • | | 7780-U-5-667-XX | | |
| | 27 W | T2 | 3000 K | 2840 lm | 105 lm/W | | | | • | 7780-U-A-666-XX |
| | | | 4000 K | 2980 lm | 110 lm/W | | | | • | 7780-U-A-667-XX |
| | | | 3000 K | 2890 lm | 107 lm/W | • | | | | 7780-I-3-666-XX |
| | | | 4000 K | 3040 lm | 112 lm/W | • | | | | 7780-I-3-667-XX |
| 3000 K | | | 2610 lm | 96 lm/W | • | | | | 7780-R-3-666-XX | |
| 4000 K | | | 2740 lm | 101 lm/W | • | | | | 7780-R-3-667-XX | |
| 3000 K | | | 2890 lm | 107 lm/W | | • | | | 7780-I-4-666-XX | |
| 4000 K | | | 3040 lm | 112 lm/W | | • | | | 7780-I-4-667-XX | |
| 3000 K | | | 2610 lm | 96 lm/W | | • | | | 7780-R-4-666-XX | |
| 4000 K | | | 2740 lm | 101 lm/W | | • | | | 7780-R-4-667-XX | |
| 27 W | T3 | 3000 K | 2890 lm | 107 lm/W | | | • | | 7780-I-5-666-XX | |
| | | 4000 K | 3040 lm | 112 lm/W | | | • | | 7780-I-5-667-XX | |
| | | 3000 K | 2610 lm | 96 lm/W | | | • | | 7780-R-5-666-XX | |
| | | 4000 K | 2740 lm | 101 lm/W | | | • | | 7780-R-5-667-XX | |
| | | 3000 K | 2890 lm | 107 lm/W | | | | • | 7780-I-A-666-XX | |
| | | 4000 K | 3040 lm | 112 lm/W | | | | • | 7780-I-A-667-XX | |
| | | 3000 K | 2610 lm | 96 lm/W | | | | • | 7780-R-A-666-XX | |
| | | 4000 K | 2740 lm | 101 lm/W | | | | • | 7780-R-A-667-XX | |
| | | 3000 K | 2730 lm | 101 lm/W | • | | | | 7780-J-3-666-XX | |
| | | 4000 K | 2870 lm | 106 lm/W | • | | | | 7780-J-3-667-XX | |
| 27 W | T4 | 3000 K | 3090 lm | 114 lm/W | • | | | | 7780-5-3-666-XX | |
| | | 4000 K | 3250 lm | 120 lm/W | • | | | | 7780-5-3-667-XX | |
| | | 3000 K | 2730 lm | 101 lm/W | | • | | | 7780-J-4-666-XX | |
| | | 4000 K | 2870 lm | 106 lm/W | | • | | | 7780-J-4-667-XX | |
| | | 3000 K | 3090 lm | 114 lm/W | | • | | | 7780-5-4-666-XX | |
| | | 4000 K | 3250 lm | 120 lm/W | | • | | | 7780-5-4-667-XX | |
| | | 3000 K | 2730 lm | 101 lm/W | | | • | | 7780-J-5-666-XX | |
| | | 4000 K | 2870 lm | 106 lm/W | | | • | | 7780-J-5-667-XX | |
| | | 3000 K | 3090 lm | 114 lm/W | | | • | | 7780-5-5-666-XX | |
| | | 4000 K | 3250 lm | 120 lm/W | | | • | | 7780-5-5-667-XX | |
| 27 W | T5 | 3000 K | 2730 lm | 101 lm/W | | | | • | 7780-J-A-666-XX | |
| | | 4000 K | 2870 lm | 106 lm/W | | | | • | 7780-J-A-667-XX | |
| | | 3000 K | 3090 lm | 114 lm/W | | | | • | 7780-5-A-666-XX | |
| | | 4000 K | 3250 lm | 120 lm/W | | | | • | 7780-5-A-667-XX | |
| | | 3000 K | 2470 lm | 91 lm/W | • | | | | 7780-K-3-666-XX | |
| | | 4000 K | 2590 lm | 95 lm/W | • | | | | 7780-K-3-667-XX | |
| | | 3000 K | 2470 lm | 91 lm/W | | • | | | 7780-K-4-666-XX | |
| | | 4000 K | 2590 lm | 95 lm/W | | • | | | 7780-K-4-667-XX | |
| | | 3000 K | 2470 lm | 91 lm/W | | | • | | 7780-K-5-666-XX | |
| | | 4000 K | 2590 lm | 95 lm/W | | | • | | 7780-K-5-667-XX | |
| 27 W | T1 | 3000 K | 2470 lm | 91 lm/W | | | | • | 7780-K-A-666-XX | |
| | | 4000 K | 2590 lm | 95 lm/W | | | | • | 7780-K-A-667-XX | |
| | | 3000 K | 3190 lm | 118 lm/W | • | | | | 7780-M-3-666-XX | |
| | | 4000 K | 3350 lm | 124 lm/W | • | | | | 7780-M-3-667-XX | |
| | | 3000 K | 2240 lm | 82 lm/W | • | | | | 7780-Y-3-666-XX | |
| | | 4000 K | 2350 lm | 87 lm/W | • | | | | 7780-Y-3-667-XX | |
| | | 3000 K | 3190 lm | 118 lm/W | | • | | | 7780-M-4-666-XX | |
| | | 4000 K | 3350 lm | 124 lm/W | | • | | | 7780-M-4-667-XX | |
| | | 3000 K | 2240 lm | 82 lm/W | | • | | | 7780-Y-4-666-XX | |
| | | 4000 K | 2350 lm | 87 lm/W | | • | | | 7780-Y-4-667-XX | |
| 27 W | T2 | 3000 K | 3190 lm | 118 lm/W | | | | • | 7780-M-5-666-XX | |
| | | 4000 K | 3350 lm | 124 lm/W | | | | • | 7780-M-5-667-XX | |
| | | 3000 K | 2240 lm | 82 lm/W | | | • | | 7780-Y-5-666-XX | |
| | | 4000 K | 2350 lm | 87 lm/W | | | • | | 7780-Y-5-667-XX | |
| | | 3000 K | 3190 lm | 118 lm/W | | | | • | 7780-M-A-666-XX | |
| | | 4000 K | 3350 lm | 124 lm/W | | | | • | 7780-M-A-667-XX | |
| | | 3000 K | 2240 lm | 82 lm/W | | | | • | 7780-Y-A-666-XX | |
| | | 4000 K | 2350 lm | 87 lm/W | | | | • | 7780-Y-A-667-XX | |
| | | 3000 K | 3870 lm | 101 lm/W | • | | | | 7780-U-3-668-XX | |
| | | 4000 K | 4090 lm | 107 lm/W | • | | | | 7780-U-3-669-XX | |
| 38 W | T1 | 3000 K | 3870 lm | 101 lm/W | | | • | | 7780-U-4-668-XX | |
| | | 4000 K | 4090 lm | 107 lm/W | | | • | | 7780-U-4-669-XX | |
| | | 3000 K | 3870 lm | 101 lm/W | | | • | | 7780-U-5-668-XX | |
| | | 4000 K | 4090 lm | 107 lm/W | | | • | | 7780-U-5-669-XX | |
| | | 3000 K | 3940 lm | 103 lm/W | • | | | | 7780-I-3-668-XX | |
| | 4000 K | 4160 lm | 109 lm/W | • | | | | 7780-I-3-669-XX | | |
| | 38 W | T2 | 3000 K | 3560 lm | 93 lm/W | • | | | | 7780-R-3-668-XX |
| | | | 4000 K | 3760 lm | 98 lm/W | • | | | | 7780-R-3-669-XX |
| | | | 3000 K | 3940 lm | 103 lm/W | | • | | | 7780-I-4-668-XX |
| | | | 4000 K | 4160 lm | 109 lm/W | | • | | | 7780-I-4-669-XX |
| 3000 K | | | 3560 lm | 93 lm/W | | • | | | 7780-R-4-668-XX | |
| 4000 K | 3760 lm | 98 lm/W | | • | | | 7780-R-4-669-XX | | | |
| 3000 K | 3940 lm | 103 lm/W | | | • | | 7780-I-5-668-XX | | | |
| 4000 K | 4160 lm | 109 lm/W | | | • | | 7780-I-5-669-XX | | | |
| 3000 K | 3560 lm | 93 lm/W | | | • | | 7780-R-5-668-XX | | | |
| 4000 K | 3760 lm | 98 lm/W | | | • | | 7780-R-5-669-XX | | | |

*Please contact sales team for special request.

| | Product Code | Luminaire Wattage | Beam | CCT | Luminaire Lumen | Efficacy | Controller | | | | Ordering Code | |
|-----------------|--|-------------------|------|--------|-----------------|----------|---|---|---|---------|-----------------|-----------------|
| | | | | | | |  |  |  | CASAMBI | | |
| KORNER 1 |  | 38 W | T3 | 3000 K | 3720 lm | 97 lm/W | • | | | | 7780-J-3-668-XX | |
| | | | | 4000 K | 3930 lm | 103 lm/W | • | | | | 7780-J-3-669-XX | |
| | | | | 3000 K | 4210 lm | 110 lm/W | • | | | | 7780-S-3-668-XX | |
| | | | | 4000 K | 4450 lm | 117 lm/W | • | | | | 7780-S-3-669-XX | |
| | | | | 3000 K | 3720 lm | 97 lm/W | | • | | | 7780-J-4-668-XX | |
| | | | | 4000 K | 3930 lm | 103 lm/W | | • | | | 7780-J-4-669-XX | |
| | | | | 3000 K | 4210 lm | 110 lm/W | | • | | | 7780-S-4-668-XX | |
| | | | | 4000 K | 4450 lm | 117 lm/W | | • | | | 7780-S-4-669-XX | |
| | | | | 3000 K | 3720 lm | 97 lm/W | | | • | | 7780-J-5-668-XX | |
| | | | | 4000 K | 3930 lm | 103 lm/W | | | • | | 7780-J-5-669-XX | |
| | | | | 3000 K | 4210 lm | 110 lm/W | | | • | | 7780-S-5-668-XX | |
| | | | | 4000 K | 4450 lm | 117 lm/W | | | • | | 7780-S-5-669-XX | |
| | | | 38 W | T4 | 3000 K | 3370 lm | 88 lm/W | • | | | | 7780-K-3-668-XX |
| | | | | | 4000 K | 3550 lm | 93 lm/W | • | | | | 7780-K-3-669-XX |
| | | | | | 3000 K | 3370 lm | 88 lm/W | | • | | | 7780-K-4-668-XX |
| | | | | | 4000 K | 3550 lm | 93 lm/W | | • | | | 7780-K-4-669-XX |
| | | | | | 3000 K | 3370 lm | 88 lm/W | | | • | | 7780-K-5-668-XX |
| | | | | | 4000 K | 3550 lm | 93 lm/W | | | • | | 7780-K-5-669-XX |
| | | | 38 W | T5 | 3000 K | 4350 lm | 114 lm/W | • | | | | 7780-M-3-668-XX |
| | | | | | 4000 K | 4590 lm | 120 lm/W | • | | | | 7780-M-3-669-XX |
| | | | | | 3000 K | 3050 lm | 80 lm/W | • | | | | 7780-Y-3-668-XX |
| | | | | | 4000 K | 3220 lm | 84 lm/W | • | | | | 7780-Y-3-669-XX |
| | | | | | 3000 K | 4350 lm | 114 lm/W | | • | | | 7780-M-4-668-XX |
| | | | | | 4000 K | 4590 lm | 120 lm/W | | • | | | 7780-M-4-669-XX |
| 3000 K | 3050 lm | 80 lm/W | | | | • | | | 7780-Y-4-668-XX | | | |
| 4000 K | 3220 lm | 84 lm/W | | | | • | | | 7780-Y-4-669-XX | | | |
| 3000 K | 4350 lm | 114 lm/W | | | | | • | | 7780-M-5-668-XX | | | |
| 4000 K | 4590 lm | 120 lm/W | | | | | • | | 7780-M-5-669-XX | | | |
| 3000 K | 3050 lm | 80 lm/W | | | | | • | | 7780-Y-5-668-XX | | | |
| 4000 K | 3220 lm | 84 lm/W | | | | | • | | 7780-Y-5-669-XX | | | |
| KORNER 2 |  | 50 W | T1 | 3000 K | 5130 lm | 102 lm/W | • | | | | 7781-U-3-666-XX | |
| | | | | 4000 K | 5390 lm | 107 lm/W | • | | | | 7781-U-3-667-XX | |
| | | | | 3000 K | 5130 lm | 102 lm/W | | • | | | 7781-U-4-666-XX | |
| | | | | 4000 K | 5390 lm | 107 lm/W | | • | | | 7781-U-4-667-XX | |
| | | | | 3000 K | 5130 lm | 102 lm/W | | | • | | 7781-U-5-666-XX | |
| | | | | 4000 K | 5390 lm | 107 lm/W | | | • | | 7781-U-5-667-XX | |
| | | | 50 W | T2 | 3000 K | 5320 lm | 106 lm/W | • | | | | 7781-I-3-666-XX |
| | | | | | 4000 K | 5590 lm | 111 lm/W | • | | | | 7781-I-3-667-XX |
| | | | | | 3000 K | 4820 lm | 96 lm/W | • | | | | 7781-R-3-666-XX |
| | | | | | 4000 K | 5070 lm | 101 lm/W | • | | | | 7781-R-3-667-XX |
| | | | | | 3000 K | 5320 lm | 106 lm/W | | • | | | 7781-I-4-666-XX |
| | | | | | 4000 K | 5590 lm | 111 lm/W | | • | | | 7781-I-4-667-XX |
| | | 3000 K | | | 4820 lm | 96 lm/W | | • | | | 7781-R-4-666-XX | |
| | | 4000 K | | | 5070 lm | 101 lm/W | | • | | | 7781-R-4-667-XX | |
| | | 3000 K | | | 5320 lm | 106 lm/W | | | • | | 7781-I-5-666-XX | |
| | | 4000 K | | | 5590 lm | 111 lm/W | | | • | | 7781-I-5-667-XX | |
| | | 3000 K | | | 4820 lm | 96 lm/W | | | • | | 7781-R-5-666-XX | |
| | | 4000 K | | | 5070 lm | 101 lm/W | | | • | | 7781-R-5-667-XX | |
| | | 50 W | T3 | 3000 K | 5320 lm | 106 lm/W | | | | • | 7781-I-A-666-XX | |
| | | | | 4000 K | 5590 lm | 111 lm/W | | | | • | 7781-I-A-667-XX | |
| | | | | 3000 K | 4820 lm | 96 lm/W | | | | • | 7781-R-A-666-XX | |
| | | | | 4000 K | 5070 lm | 101 lm/W | | | | • | 7781-R-A-667-XX | |
| | | | | 3000 K | 5010 lm | 100 lm/W | • | | | | 7781-J-3-666-XX | |
| | | | | 4000 K | 5270 lm | 105 lm/W | • | | | | 7781-J-3-667-XX | |
| | | | | 3000 K | 4600 lm | 92 lm/W | • | | | | 7781-S-3-666-XX | |
| | | | | 4000 K | 4830 lm | 96 lm/W | • | | | | 7781-S-3-667-XX | |
| | | | | 3000 K | 5010 lm | 100 lm/W | | • | | | 7781-J-4-666-XX | |
| | | | | 4000 K | 5270 lm | 105 lm/W | | • | | | 7781-J-4-667-XX | |
| | | | | 3000 K | 4600 lm | 92 lm/W | | • | | | 7781-S-4-666-XX | |
| | | | | 4000 K | 4830 lm | 96 lm/W | | • | | | 7781-S-4-667-XX | |
| | | 50 W | T4 | 3000 K | 5010 lm | 100 lm/W | | | | • | 7781-J-5-666-XX | |
| | | | | 4000 K | 5270 lm | 105 lm/W | | | | • | 7781-J-5-667-XX | |
| | | | | 3000 K | 4600 lm | 92 lm/W | | | • | | 7781-S-5-666-XX | |
| | | | | 4000 K | 4830 lm | 96 lm/W | | | • | | 7781-S-5-667-XX | |
| | | | | 3000 K | 5010 lm | 100 lm/W | | | | • | 7781-J-A-666-XX | |
| | | | | 4000 K | 5270 lm | 105 lm/W | | | | • | 7781-J-A-667-XX | |
| | | | | 3000 K | 4600 lm | 92 lm/W | | | | • | 7781-S-A-666-XX | |
| | | | | 4000 K | 4830 lm | 96 lm/W | | | | • | 7781-S-A-667-XX | |
| | | | | 3000 K | 4510 lm | 90 lm/W | • | | | | 7781-K-3-666-XX | |
| | | | | 4000 K | 4740 lm | 94 lm/W | • | | | | 7781-K-3-667-XX | |
| | | | | 3000 K | 4510 lm | 90 lm/W | | • | | | 7781-K-4-666-XX | |
| | | | | 4000 K | 4740 lm | 94 lm/W | | • | | | 7781-K-4-667-XX | |
| | | 50 W | T4 | 3000 K | 4510 lm | 90 lm/W | | | | • | 7781-K-5-666-XX | |
| | | | | 4000 K | 4740 lm | 94 lm/W | | | | • | 7781-K-5-667-XX | |
| | | | | 3000 K | 4510 lm | 90 lm/W | | | | • | 7781-K-A-666-XX | |
| | | | | 4000 K | 4740 lm | 94 lm/W | | | | • | 7781-K-A-667-XX | |

KORNER 2

| Product Code | Luminaire Wattage | Beam | CCT | Luminaire Lumen | Efficacy | Controller | | | | Ordering Code |
|---|-------------------|---------|----------|-----------------|----------|---|--|---|---|-----------------|
| | | | | | |  |  |  |  | |
| OD-7781  | 50 W | T5 | 3000 K | 5790 lm | 115 lm/W | • | | | | 7781-M-3-666-XX |
| | | | 4000 K | 6090 lm | 121 lm/W | • | | | | 7781-M-3-667-XX |
| | | | 3000 K | 4090 lm | 81 lm/W | • | | | | 7781-Y-3-666-XX |
| | | | 4000 K | 4300 lm | 86 lm/W | • | | | | 7781-Y-3-667-XX |
| | | | 3000 K | 5790 lm | 115 lm/W | | • | | | 7781-M-4-666-XX |
| | | | 4000 K | 6090 lm | 121 lm/W | | • | | | 7781-M-4-667-XX |
| | | | 3000 K | 4090 lm | 81 lm/W | | • | | | 7781-Y-4-666-XX |
| | | | 4000 K | 4300 lm | 86 lm/W | | • | | | 7781-Y-4-667-XX |
| | | | 3000 K | 5790 lm | 115 lm/W | | | • | | 7781-M-5-666-XX |
| | | | 4000 K | 6090 lm | 121 lm/W | | | • | | 7781-M-5-667-XX |
| | | | 3000 K | 4090 lm | 81 lm/W | | | • | | 7781-Y-5-666-XX |
| | | | 4000 K | 4300 lm | 86 lm/W | | | • | | 7781-Y-5-667-XX |
| | 3000 K | 5790 lm | 115 lm/W | | | | • | 7781-M-A-666-XX | | |
| | 4000 K | 6090 lm | 121 lm/W | | | | • | 7781-M-A-667-XX | | |
| | 3000 K | 4090 lm | 81 lm/W | | | | • | 7781-Y-A-666-XX | | |
| | 4000 K | 4300 lm | 86 lm/W | | | | • | 7781-Y-A-667-XX | | |
| | 3000 K | 7000 lm | 100 lm/W | | | • | | 7781-U-3-668-XX | | |
| | 4000 K | 7390 lm | 105 lm/W | | | • | | 7781-U-3-669-XX | | |
| | 3000 K | 7000 lm | 100 lm/W | | | | • | 7781-U-4-668-XX | | |
| | 4000 K | 7390 lm | 105 lm/W | | | | • | 7781-U-4-669-XX | | |
| | 3000 K | 7000 lm | 100 lm/W | | | | | 7781-U-5-668-XX | | |
| | 4000 K | 7390 lm | 105 lm/W | | | | | 7781-U-5-669-XX | | |
| | 3000 K | 7260 lm | 103 lm/W | | | • | | 7781-I-3-668-XX | | |
| | 4000 K | 7660 lm | 109 lm/W | | | • | | 7781-I-3-669-XX | | |
| | 3000 K | 6570 lm | 93 lm/W | | | • | | 7781-R-3-668-XX | | |
| | 4000 K | 6940 lm | 99 lm/W | | | • | | 7781-R-3-669-XX | | |
| | 3000 K | 7260 lm | 103 lm/W | | | | • | 7781-I-4-668-XX | | |
| | 4000 K | 7660 lm | 109 lm/W | | | | • | 7781-I-4-669-XX | | |
| | 3000 K | 6570 lm | 93 lm/W | | | | • | 7781-R-4-668-XX | | |
| | 4000 K | 6940 lm | 99 lm/W | | | | • | 7781-R-4-669-XX | | |
| | 3000 K | 7260 lm | 103 lm/W | | | | | 7781-I-5-668-XX | | |
| | 4000 K | 7660 lm | 109 lm/W | | | | | 7781-I-5-669-XX | | |
| | 3000 K | 6570 lm | 93 lm/W | | | | | 7781-R-5-668-XX | | |
| | 4000 K | 6940 lm | 99 lm/W | | | | | 7781-R-5-669-XX | | |
| | 3000 K | 6830 lm | 97 lm/W | | | • | | 7781-J-3-668-XX | | |
| | 4000 K | 7210 lm | 103 lm/W | | | • | | 7781-J-3-669-XX | | |
| | 3000 K | 6270 lm | 89 lm/W | | | • | | 7781-S-3-668-XX | | |
| | 4000 K | 6620 lm | 94 lm/W | | | • | | 7781-S-3-669-XX | | |
| | 3000 K | 6830 lm | 97 lm/W | | | | • | 7781-J-4-668-XX | | |
| | 4000 K | 7210 lm | 103 lm/W | | | | • | 7781-J-4-669-XX | | |
| | 3000 K | 6270 lm | 89 lm/W | | | | • | 7781-S-4-668-XX | | |
| | 4000 K | 6620 lm | 94 lm/W | | | | • | 7781-S-4-669-XX | | |
| | 3000 K | 6830 lm | 97 lm/W | | | | | 7781-J-5-668-XX | | |
| | 4000 K | 7210 lm | 103 lm/W | | | | | 7781-J-5-669-XX | | |
| | 3000 K | 6270 lm | 89 lm/W | | | | | 7781-S-5-668-XX | | |
| | 4000 K | 6620 lm | 94 lm/W | | | | | 7781-S-5-669-XX | | |
| | 3000 K | 6150 lm | 87 lm/W | | | • | | 7781-K-3-668-XX | | |
| | 4000 K | 6490 lm | 92 lm/W | | | • | | 7781-K-3-669-XX | | |
| | 3000 K | 6150 lm | 87 lm/W | | | | • | 7781-K-4-668-XX | | |
| | 4000 K | 6490 lm | 92 lm/W | | | | • | 7781-K-4-669-XX | | |
| | 3000 K | 6150 lm | 87 lm/W | | | | | 7781-K-5-668-XX | | |
| | 4000 K | 6490 lm | 92 lm/W | | | | | 7781-K-5-669-XX | | |
| | 3000 K | 7900 lm | 112 lm/W | | | • | | 7781-M-3-668-XX | | |
| | 4000 K | 8340 lm | 119 lm/W | | | • | | 7781-M-3-669-XX | | |
| | 3000 K | 5580 lm | 79 lm/W | | | • | | 7781-Y-3-668-XX | | |
| | 4000 K | 5890 lm | 84 lm/W | | | • | | 7781-Y-3-669-XX | | |
| | 3000 K | 7900 lm | 112 lm/W | | | | • | 7781-M-4-668-XX | | |
| | 4000 K | 8340 lm | 119 lm/W | | | | • | 7781-M-4-669-XX | | |
| | 3000 K | 5580 lm | 79 lm/W | | | | • | 7781-Y-4-668-XX | | |
| | 4000 K | 5890 lm | 84 lm/W | | | | • | 7781-Y-4-669-XX | | |
| | 3000 K | 7900 lm | 112 lm/W | | | | | 7781-M-5-668-XX | | |
| | 4000 K | 8340 lm | 119 lm/W | | | | | 7781-M-5-669-XX | | |
| | 3000 K | 5580 lm | 79 lm/W | | | | | 7781-Y-5-668-XX | | |
| | 4000 K | 5890 lm | 84 lm/W | | | | | 7781-Y-5-669-XX | | |