




Suspended decorative luminaire for LED light sources; aluminum profile available in various colors, equipped with an efficient lighting system, optimized for indoor use.

- **High efficacy to 134 lm/W**
- Maintenance-free operation
- Dedicated LED light sources
- Perfect combination of aesthetics and ergonomics
- Luminaire body made of aluminum
- Fast and easy mounting
- Possible illuminance control
- Modern design
- Passive cooling system
- Well thought-out installation concept



Other pictures

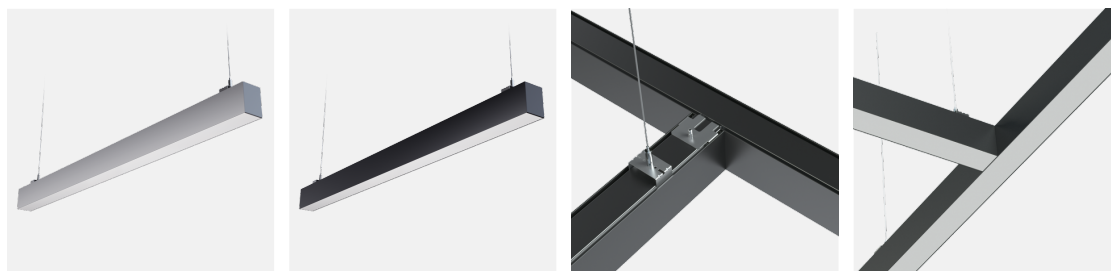

Mechanical data

Mounting

suspended, on wire
suspension (on request)

Length [mm]

606, 1206, 1506, 2406

Body colour

anode C-0, black, white

Operating temperature range [°C]

0 ... +35

Body

aluminum profile

Type

MPRM diffuser - HIGH -
recommended for use with
ceilings over 3m high, MPRM
diffuser - LOW -
recommended for use in
ceilings up to 3m high, opal
diffuser - HIGH -
recommended for use with
ceilings over 3m high, opal
diffuser - LOW -
recommended for use in
ceilings up to 3m high

Electrical data

Power

220-240V 50/60Hz

Includes light source

yes

Luminaire power [W]

14 - 71

Output current [mA]

350, 700, 1050, 1400

Type of equipment

DALI, ED

Light source / lamp

LED

Maximum number of luminaires in the circuit with a 10A fuse (B)

34

Maximum number of luminaires in the circuit with a 16A fuse (B)

13 - 56

Optical data

Light distribution

omnidirectional

Way of lighting

direct

Reflector

white

Diffuser

microprismatic diffuser
(MPRM), opal matt (PMMA)

Colour temperature [K]

3000, 4000

CRI/Ra

≥80

ULOR / DLOR

0/100

Lumen luminaire [lm]

1650 - 9500

Efficacy [lm/W]

118 - 134

Photobiological risk group

RG1

SVM

≤0,4

PstLM

≤1

General data

Lifetime L80B10

100 000 h

Warranty

5 years

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com


Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.

Colour temperature tolerance +/- 5%.

Dimensions

Dimensions [mm] LxWxH	Pallet quantity	Net weight [kg]
606x60x80	120	2.6
1206x60x80	120	3.9
1506x60x80	120	4.5
2406x60x80	120	6.4

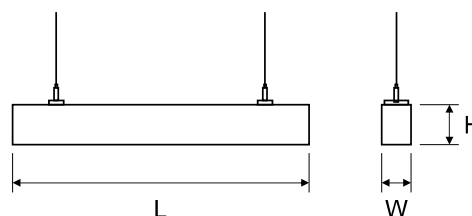

Accessories



150030.01050


VOLICA 2.0 LED susp
mechanical connector 90°

150060.00062

Suspension hanger MINI


 150061.00063
 150065.00065
 150062.00064
Mechanical round
suspension
 150061.00066
 150065.00068
 150062.00067
Mechanical round
suspension with supply
connector

Light beam curves

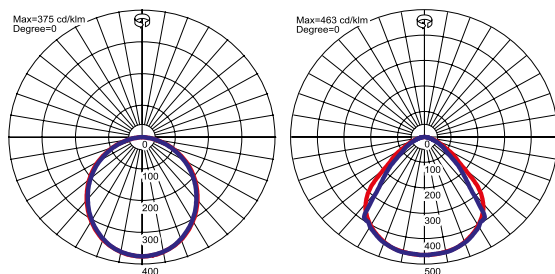

Way of lighting

