



SPECIFICATIONS

IP 66 IK 10 Tool-less opening


PRODUCT NAME	PIXEL 1	PIXEL 2
HOUSING	Injection die-cast aluminium body	
BOWL	Thermally tempered and screen printed flat glass	
FINISH	Polyester powder coating, any colour available	
SOURCES	BLS strips	
COLOUR TEMPERATURE	Amber*, 2200 K, 2400 K, 2700 K, 3000 K or 4000 K	
OPTICAL	QUADRALENS	
FLUX & POWER**	Up to 6960lm; 53W	Up to 17451lm; 123W
ELECTRICAL CLASS	Class I or II	
WIRING	Pre-wired at the factory	
MOUNTING	Post top, lateral	



*Approx. 1800K
**At 3000K, in accordance with performance standards IEC 62717 and IEC 62722 (+/-5%tolerance)



- ▶ Smart-ready® (Zd4i)
- ▶ Dimming
- ▶ Detection
- ▶ Tunable white options
- ▶ WIZARD management system (pag. 420)


MECHANICAL INTERFACES

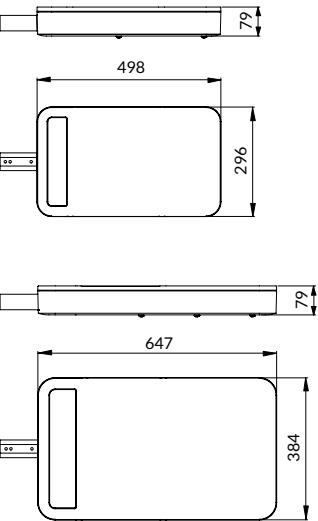

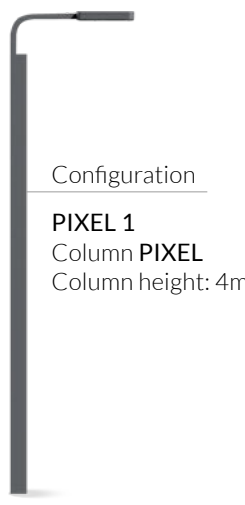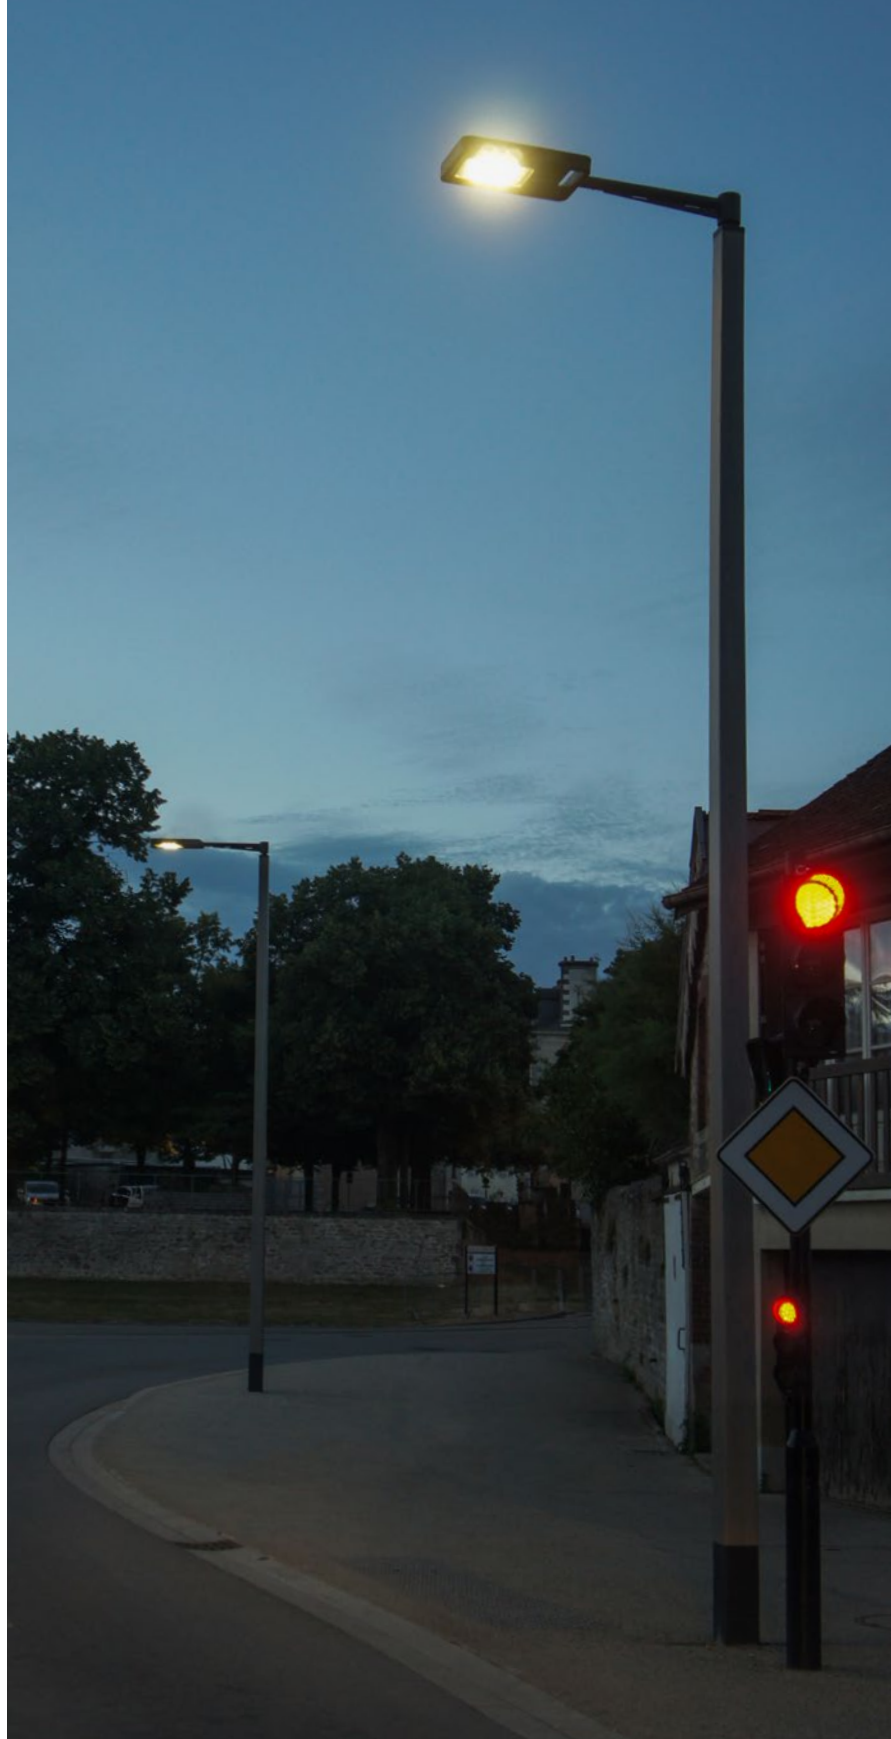


Configuration

PIXEL 1
Column **PIXEL**
Column height: 4m

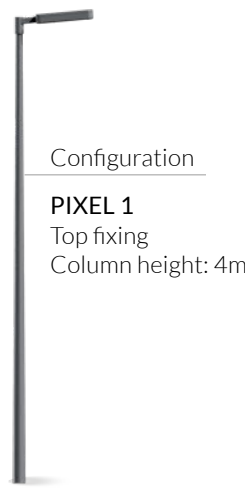


Configuration

PIXEL 1
Top fixing
Column height: 4m

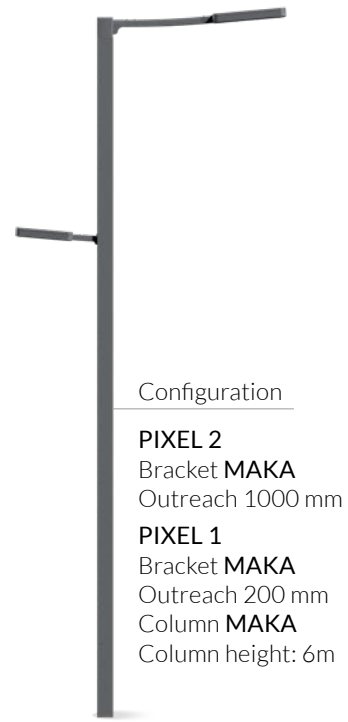

Configuration

PIXEL 2
Bracket **MAKA**
Outreach 1000 mm
PIXEL 1
Bracket **MAKA**
Outreach 200 mm
Column **MAKA**
Column height: 6m

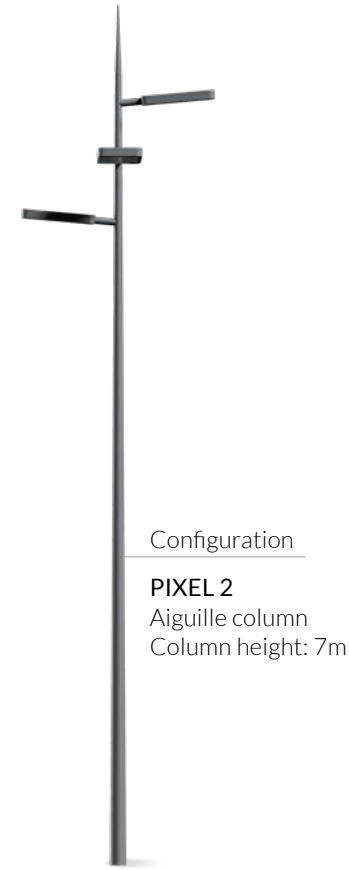

Configuration

PIXEL 2
Aiguille column
Column height: 7m