



STANZA

SPECIFICATIONS

IP 66 IK 10

PRODUCT NAME	STANZA POST TOP	STANZA SUSPENDED
HOUSING	Die-cast aluminium body Arms in polycarbonate (UV treatment)	
BOWL	Thermally toughened flat glass	
FINISH	Polyester powder coating, any colour available	
SOURCES	SOMLED 1 / BLS Strips	
COLOUR TEMPERATURE	SOMLED 1: 3000K or 4000K BLS: Amber*, 2200 K, 2400 K, 2700 K, 3000K, 4000 K	
OPTICAL	ORALENS / QUADRALENS	
FLUX & POWER**	Up to 11 735lm; 102W	
ELECTRICAL CLASS	Class I or II	
WIRING	Pre-wired at the factory (6 m) (post top version only)	
MOUNTING	Post top, suspended	

*Approx. 1800K
**At 3000K, in accordance with performance standards IEC 62717 and IEC 62722 (+/-5%tolerance)



- ▶ Smart-ready® (Zd4i)
- ▶ Dimming
- ▶ Detection
- ▶ Tunable white options
- ▶ WIZARD management system (pag. 420)

MECHANICAL INTERFACES




POST TOP




SUSPENDED


Post top with aluminium frame





Suspended with aluminium frame



Suspended without bracket




Suspended with polycarbonate bracket





Configuration

STRIUM Helix column
STANZA R bracket
 Outreach: 1000mm
 Column height: 7m

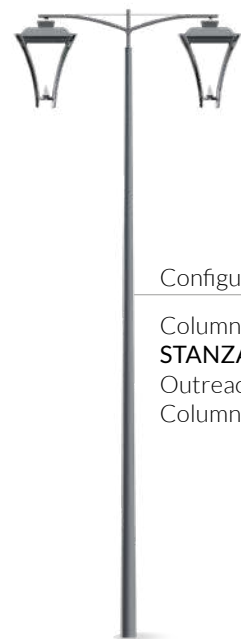

Configuration

Column ø 76 mm
STANZA C bracket
 Outreach: 800mm
 Column height: 5m



Configuration

FESTONE column
 Column height: 4m

