

NEWLY Added STICK



POLE MOUNTED



STICK is a modern, cylindrical light column designed to provide optimal lighting performance with both symmetrical and asymmetrical light distribution options. It offers three color temperatures—2700K, 3000K, and 4000K—with exceptional color consistency and a high color rendering index, ensuring vibrant and accurate illumination. Equipped with advanced lenses, **STICK** directs light precisely to the ground surface, aligning with dark sky compliance to minimize light pollution.

Built to withstand harsh environments, **STICK** features a durable cast aluminum body with a robust polycarbonate cover, offering excellent protection against weather and impacts. The surface is treated with nano-ceramic conversion technology, enhancing corrosion resistance and ensuring a long service life even in challenging outdoor conditions.

STICK is an excellent choice for illuminating walkways, gardens, parks, commercial spaces, and open areas, providing uniform general lighting at a medium-to-high level. With a recommended mounting height of 3 to 5 meters, **STICK** delivers high efficacy of at least 120lm/W, ensuring energy-efficient performance. Its design minimizes uplight, contributing to a glare-free, comfortable lighting experience. It operates reliably in ambient temperatures up to 50°C, making it suitable for a variety of climates.

Available as a light column or pole-top light, **STICK** offers flexibility for new installations and site upgrades. Combining sleek aesthetics, high functionality, and durability, **STICK** is a versatile lighting solution for modern outdoor environments.



www.unilamp.co.th/en/p/stick

Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum and extruded aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- PC protective cover.
- Anodized aluminum louvers.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Installation must be carried out according to the enclosed product manual.

Available Color



***Custom colors are available on request.*

Typical Application





Typical Application



STICK



STICK

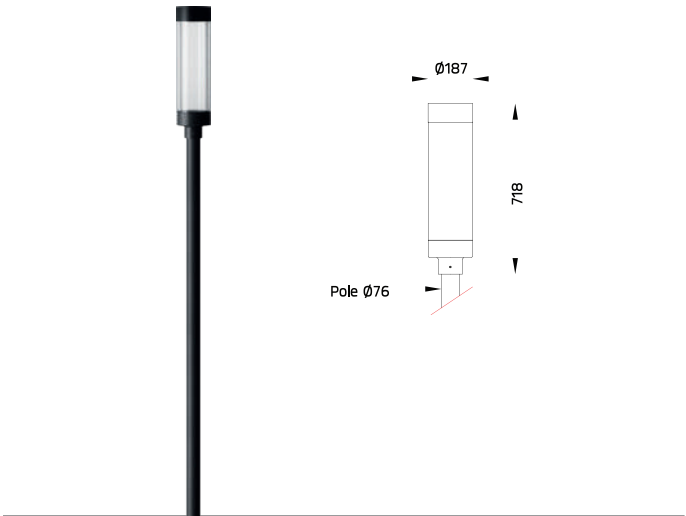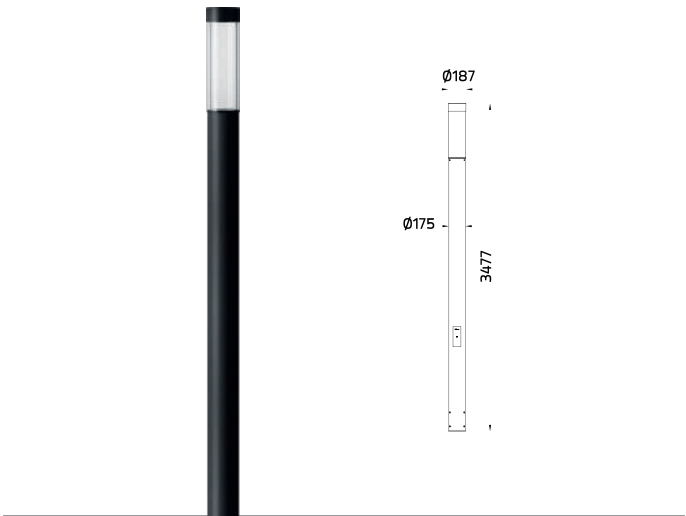

* Pole is not included and has to be ordered separately.

STICK

NEW!

Application Type : Light column
Subgroup : Urban area / Urban ambient

STICK / 7268	
Luminaire Performance	
3090 – 4770 lm	
26 – 36 W	
117 – 133 lm/W	
Beam Options	
T1	T5
Color Temperature	
3000K/ 4000K	
Controller	
On-off/ DIM 1-10V/ DALI/ Casambi	
Input Voltage	
220-240Vac 50/60Hz	

STICK

NEW!

Application Type : Pole mounted
Subgroup : Urban area / Urban ambient

STICK / 7269	
Luminaire Performance	
3090 – 4770 lm	
26 – 36 W	
117 – 133 lm/W	
Beam Options	
T1	T5
Color Temperature	
3000K/ 4000K	
Controller	
On-off/ DIM 1-10V/ DALI/ Casambi	
Input Voltage	
220-240Vac 50/60Hz	

Accessories

 Aluminum pole

 Steel pole

 Anchor bolt

STICK

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
										
OD-7268 	26 W	T1	3000 K	3210 lm	123 lm/W	•				7268-U-3-668-XX
			4000 K	3380 lm	130 lm/W	•				7268-U-3-669-XX
			3000 K	3210 lm	123 lm/W		•			7268-U-4-668-XX
			4000 K	3380 lm	130 lm/W		•			7268-U-4-669-XX
			3000 K	3210 lm	123 lm/W			•		7268-U-5-668-XX
			4000 K	3380 lm	130 lm/W			•		7268-U-5-669-XX
	26 W	T1	3000 K	3210 lm	123 lm/W				•	7268-U-A-668-XX
			4000 K	3380 lm	130 lm/W				•	7268-U-A-669-XX
			3000 K	3200 lm	123 lm/W	•				7268-V-3-668-XX
			4000 K	3360 lm	129 lm/W	•				7268-V-3-669-XX
			3000 K	3200 lm	123 lm/W		•			7268-V-4-668-XX
			4000 K	3360 lm	129 lm/W		•			7268-V-4-669-XX
	26 W	T5	3000 K	3200 lm	123 lm/W			•		7268-V-5-668-XX
			4000 K	3360 lm	129 lm/W			•		7268-V-5-669-XX
			3000 K	3200 lm	123 lm/W				•	7268-V-A-668-XX
			4000 K	3360 lm	129 lm/W				•	7268-V-A-669-XX
			3000 K	3090 lm	118 lm/W	•				7268-L-3-668-XX
			4000 K	3260 lm	125 lm/W	•				7268-L-3-669-XX
	26 W	T5	3000 K	3090 lm	118 lm/W		•			7268-L-4-668-XX
			4000 K	3260 lm	125 lm/W		•			7268-L-4-669-XX
			3000 K	3090 lm	118 lm/W			•		7268-L-5-668-XX
			4000 K	3260 lm	125 lm/W			•		7268-L-5-669-XX
			3000 K	3090 lm	118 lm/W				•	7268-L-A-668-XX
			4000 K	3260 lm	125 lm/W				•	7268-L-A-669-XX
	26 W	T5	3000 K	3310 lm	127 lm/W	•				7268-M-3-668-XX
			4000 K	3480 lm	133 lm/W	•				7268-M-3-669-XX
			3000 K	3310 lm	127 lm/W		•			7268-M-4-668-XX
			4000 K	3480 lm	133 lm/W		•			7268-M-4-669-XX
			3000 K	3310 lm	127 lm/W			•		7268-M-5-668-XX
			4000 K	3480 lm	133 lm/W			•		7268-M-5-669-XX
	36 W	T1	3000 K	3310 lm	127 lm/W				•	7268-M-A-668-XX
			4000 K	3480 lm	133 lm/W				•	7268-M-A-669-XX
			3000 K	4390 lm	121 lm/W	•				7268-U-3-666-XX
			4000 K	4630 lm	128 lm/W	•				7268-U-3-667-XX
			3000 K	4390 lm	121 lm/W		•			7268-U-4-666-XX
			4000 K	4630 lm	128 lm/W		•			7268-U-4-667-XX
	36 W	T1	3000 K	4390 lm	121 lm/W			•		7268-U-5-666-XX
			4000 K	4630 lm	128 lm/W			•		7268-U-5-667-XX
			3000 K	4390 lm	121 lm/W				•	7268-U-A-666-XX
			4000 K	4630 lm	128 lm/W				•	7268-U-A-667-XX
			3000 K	4370 lm	121 lm/W	•				7268-V-3-666-XX
			4000 K	4610 lm	128 lm/W	•				7268-V-3-667-XX
	36 W	T1	3000 K	4370 lm	121 lm/W		•			7268-V-4-666-XX
			4000 K	4610 lm	128 lm/W		•			7268-V-4-667-XX
			3000 K	4370 lm	121 lm/W			•		7268-V-5-666-XX
			4000 K	4610 lm	128 lm/W			•		7268-V-5-667-XX
			3000 K	4370 lm	121 lm/W				•	7268-V-A-666-XX
			4000 K	4610 lm	128 lm/W				•	7268-V-A-667-XX
	36 W	T5	3000 K	4230 lm	117 lm/W	•				7268-L-3-666-XX
			4000 K	4460 lm	123 lm/W	•				7268-L-3-667-XX
			3000 K	4230 lm	117 lm/W		•			7268-L-4-666-XX
			4000 K	4460 lm	123 lm/W		•			7268-L-4-667-XX
			3000 K	4230 lm	117 lm/W			•		7268-L-5-666-XX
			4000 K	4460 lm	123 lm/W			•		7268-L-5-667-XX
	36 W	T5	3000 K	4230 lm	117 lm/W				•	7268-L-A-666-XX
			4000 K	4460 lm	123 lm/W				•	7268-L-A-667-XX
			3000 K	4520 lm	125 lm/W	•				7268-M-3-666-XX
			4000 K	4770 lm	132 lm/W	•				7268-M-3-667-XX
			3000 K	4520 lm	125 lm/W		•			7268-M-4-666-XX
			4000 K	4770 lm	132 lm/W		•			7268-M-4-667-XX
	36 W	T5	3000 K	4520 lm	125 lm/W			•		7268-M-5-666-XX
			4000 K	4770 lm	132 lm/W			•		7268-M-5-667-XX
			3000 K	4520 lm	125 lm/W				•	7268-M-A-666-XX
			4000 K	4770 lm	132 lm/W				•	7268-M-A-667-XX

*Please contact sales team for special request.

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
									CASAMBI	
OD-7269 	26 W	T1	3000 K	3210 lm	123 lm/W	•				7269-U-3-668-XX
			4000 K	3380 lm	130 lm/W	•				7269-U-3-669-XX
			3000 K	3210 lm	123 lm/W		•			7269-U-4-668-XX
			4000 K	3380 lm	130 lm/W		•			7269-U-4-669-XX
			3000 K	3210 lm	123 lm/W			•		7269-U-5-668-XX
			4000 K	3380 lm	130 lm/W			•		7269-U-5-669-XX
	26 W	T1	3000 K	3210 lm	123 lm/W				•	7269-U-A-668-XX
			4000 K	3380 lm	130 lm/W				•	7269-U-A-669-XX
			3000 K	3200 lm	123 lm/W	•				7269-V-3-668-XX
			4000 K	3360 lm	129 lm/W	•				7269-V-3-669-XX
			3000 K	3200 lm	123 lm/W		•			7269-V-4-668-XX
			4000 K	3360 lm	129 lm/W		•			7269-V-4-669-XX
	26 W	T5	3000 K	3200 lm	123 lm/W			•		7269-V-5-668-XX
			4000 K	3360 lm	129 lm/W			•		7269-V-5-669-XX
			3000 K	3200 lm	123 lm/W				•	7269-V-A-668-XX
			4000 K	3360 lm	129 lm/W				•	7269-V-A-669-XX
			3000 K	3090 lm	118 lm/W	•				7269-L-3-668-XX
			4000 K	3260 lm	125 lm/W	•				7269-L-3-669-XX
	26 W	T5	3000 K	3090 lm	118 lm/W		•			7269-L-4-668-XX
			4000 K	3260 lm	125 lm/W		•			7269-L-4-669-XX
			3000 K	3090 lm	118 lm/W			•		7269-L-5-668-XX
			4000 K	3260 lm	125 lm/W			•		7269-L-5-669-XX
			3000 K	3090 lm	118 lm/W				•	7269-L-A-668-XX
			4000 K	3260 lm	125 lm/W				•	7269-L-A-669-XX
	26 W	T5	3000 K	3310 lm	127 lm/W	•				7269-M-3-668-XX
			4000 K	3480 lm	133 lm/W	•				7269-M-3-669-XX
			3000 K	3310 lm	127 lm/W		•			7269-M-4-668-XX
			4000 K	3480 lm	133 lm/W		•			7269-M-4-669-XX
			3000 K	3310 lm	127 lm/W			•		7269-M-5-668-XX
			4000 K	3480 lm	133 lm/W			•		7269-M-5-669-XX
	36 W	T1	3000 K	4390 lm	121 lm/W				•	7269-M-A-668-XX
			4000 K	4630 lm	128 lm/W				•	7269-M-A-669-XX
			3000 K	4390 lm	121 lm/W	•				7269-U-3-666-XX
			4000 K	4630 lm	128 lm/W	•				7269-U-3-667-XX
			3000 K	4390 lm	121 lm/W		•			7269-U-4-666-XX
			4000 K	4630 lm	128 lm/W		•			7269-U-4-667-XX
	36 W	T1	3000 K	4390 lm	121 lm/W			•		7269-U-5-666-XX
			4000 K	4630 lm	128 lm/W			•		7269-U-5-667-XX
			3000 K	4390 lm	121 lm/W				•	7269-U-A-666-XX
			4000 K	4630 lm	128 lm/W				•	7269-U-A-667-XX
			3000 K	4370 lm	121 lm/W	•				7269-V-3-666-XX
			4000 K	4610 lm	128 lm/W	•				7269-V-3-667-XX
	36 W	T1	3000 K	4370 lm	121 lm/W		•			7269-V-4-666-XX
			4000 K	4610 lm	128 lm/W		•			7269-V-4-667-XX
			3000 K	4370 lm	121 lm/W			•		7269-V-5-666-XX
			4000 K	4610 lm	128 lm/W			•		7269-V-5-667-XX
			3000 K	4370 lm	121 lm/W				•	7269-V-A-666-XX
			4000 K	4610 lm	128 lm/W				•	7269-V-A-667-XX
	36 W	T5	3000 K	4230 lm	117 lm/W	•				7269-L-3-666-XX
			4000 K	4460 lm	123 lm/W	•				7269-L-3-667-XX
			3000 K	4230 lm	117 lm/W		•			7269-L-4-666-XX
			4000 K	4460 lm	123 lm/W		•			7269-L-4-667-XX
			3000 K	4230 lm	117 lm/W			•		7269-L-5-666-XX
			4000 K	4460 lm	123 lm/W			•		7269-L-5-667-XX
	36 W	T5	3000 K	4230 lm	117 lm/W				•	7269-L-A-666-XX
			4000 K	4460 lm	123 lm/W				•	7269-L-A-667-XX
			3000 K	4520 lm	125 lm/W	•				7269-M-3-666-XX
			4000 K	4770 lm	132 lm/W	•				7269-M-3-667-XX
			3000 K	4520 lm	125 lm/W		•			7269-M-4-666-XX
			4000 K	4770 lm	132 lm/W		•			7269-M-4-667-XX
	36 W	T5	3000 K	4520 lm	125 lm/W			•		7269-M-5-666-XX
			4000 K	4770 lm	132 lm/W			•		7269-M-5-667-XX
			3000 K	4520 lm	125 lm/W				•	7269-M-A-666-XX
			4000 K	4770 lm	132 lm/W				•	7269-M-A-667-XX

Typical Application

